

This is the form of material change report required under Section 85(1) of the ***Securities Act*** and section 151 of the ***Securities Rules***.

BC FORM 53-901F
(formerly Form 27)

Securities Act

MATERIAL CHANGE REPORT UNDER SECTION 85(1) OF THE ACT

NOTE: This form is intended as a guideline. A letter or other document may be used if the substantive requirements of this form are complied with.

NOTE: If this report is filed on a confidential basis, put at the beginning of the report in block capitals "CONFIDENTIAL - SECTION 85", and in an envelope marked "Confidential - Attention: Supervisor, Financial Reporting".

Item 1. **Reporting Issuer**

Oromin Explorations Ltd.
Suite 2000, 1055 West Hastings Street
Vancouver, B.C.
V6E 2E9

Item 2. **Date of Material Change**

June 19, 2006

Item 3. **Press Release**

June 19, 2006, Vancouver, B.C.

Item 4. **Summary of Material Change**

Additional drilling results from the Sabodala Property announced.

Item 5. **Full Description of Material Change**

See attached news release.

Item 6. **Reliance on Section 85(2) of the Act**

Not applicable

Item 7. Omitted Information

There are no other proposed material changes in the affairs of the Issuer which have not been disclosed in this form.

Item 8. Senior Officers

Enquiries may be directed to J.G. Stewart, the Issuer's Secretary at 604-331-8772

Item 9. Statement of Senior Officer

The foregoing accurately discloses the material change referred to here.

Dated at Vancouver, B.C. this 20th day of June, 2006.

OROMIN EXPLORATIONS LTD.

By: **"J. G. Stewart"**
Secretary
(Official Capacity)
J.G. Stewart
(Please print here name of individual
whose signature appears above.)

June 19, 2006

Trading Symbol: TSX Venture – OLE
Web Site: www.oromin.com

ADDITIONAL DRILLING SUCCESS AT SABODALA

HIGHLIGHTS

- **HOLE DH 17 AT GOLOUMA WEST INTERSECTS 65 METRES GRADING 7.83 G/T GOLD**
- **EXCAVATOR TRENCH TR-62 AT GOLOUMA WEST RETURNS 17 METRES GRADING 24.09 G/T GOLD**

Oromin Explorations Ltd. (TSX-V:OLE) is pleased to report the results from an additional seven drill holes on its Sabodala Property in eastern Sénégal. Oromin has now completed twenty-two drill holes on its priority target areas and has results for nineteen drill holes, twelve of which have previously been announced. The attached map and Oromin's website shows the location of the drill holes and trenches.

The latest drilling continues to expand the mineralized zones at Golouma West and Golouma South. Work is continuing at the Niakafiri South area, the Masato area and three zones within the broad Golouma gold geochemical anomaly.

The focus of Oromin's exploration at Sabodala is to find and delineate all gold deposits within the 230 square kilometre Sabodala exploration concession. Exploration will continue through the rainy season to expedite its property-wide evaluation. Oromin plans to utilize two core rigs on all currently known mineralized zones and new discoveries over the summer months and plans to begin detailed grid-based reverse circulation drilling to further delineate and define each deposit.

The new results outlined in the following tables include four holes from Golouma West, where drilling continues, and three holes from Golouma South. In addition, results from a series of recently completed excavator trenches at the Golouma West target area are also set out below.

Golouma West

Drill Hole (DH) or Trench (TR)	Grid Co-ordinates	Azimuth/ Dip	From – To (m)	Interval (m)	Gold (g/t)
DH-16	3550N/4680E	030°/-45°	48.0-66.0	18.0	2.84
			incl. 51.0-57.0	6.0	5.93
			80.0-90.0	10.0	3.50

Drill Hole (DH) or Trench (TR)	Grid Co-ordinates	Azimuth/ Dip	From – To (m)	Interval (m)	Gold (g/t)
DH-17	3550N/4680E	030°/-65°	67.0-132.0	65.0	7.83
			incl. 67.0-76.0	9.0	2.65
			and 96.0-108.0	12.0	3.79
			and 118.0-121.0	3.0	2.73
			and 125.0-132.0	*7.0	60.73
DH-18	3550N/4705E	030°/-45°	84.0-88.0	4.0	3.42
DH-19	3550N/4705E	030°/-65°	110.0-112.0	2.0	1.77
			115.0-121.0	6.0	1.38
			131.0-133.0	2.0	2.48
TR-56	3532N/4722E	020°	34.0-38.0	4.0	2.08
TR-57	3589N/4598E	360°	29.0-41.0	12.0	7.67
			incl. 31.0-32.0	1.0	82.8
TR-58	3487N/4785E	040°	11.0-15.0	4.0	1.26
TR-59	3389N/4854E	025°	6.0-12.0	6.0	16.62
			incl. 11.0-12.0	1.0	66.2
TR-60	3357N/4922E	025°	**7.0-10.0	3.0+	6.22
TR-61	3589N/4801E	030°	39.0-53.0	14.0	2.30
TR-62	3621N/4537E	005°	20.0-37.0	17.0	24.09
			incl. 32.0-33.0	1.0	364.7
TR-65	3603N/4433E	355°	31.0-42.0	11.0	2.42

* Four adjacent one metre samples within this interval were analysed by the total gold-metallic screen method. Because of the presence of visible gold within the core, these samples were selected for analysis by this method, which is more accurate in such circumstances.

** A 2.0 metre wide artisanal mining pit lies adjacent to the 3.0 metre minimum sampling width reported here.

Trenching and drilling have now confirmed gold mineralization at Golouma West along a minimum strike extent of 750 metres within a NW-SE trending soil anomaly traceable for over 1,000 metres within the much broader Golouma gold anomaly. Drill results display excellent correlation to a minimum vertical depth of 125 metres. Reported core intervals are not true widths. Oromin is planning additional excavator trenching and drilling along the mineralized trend both to the NW, SE and down-dip of the holes drilled to date.

Golouma South

Drill Hole (DH) or Trench (TR)	Grid Co-ordinates	Azimuth/Dip	From – To (m)	Interval (m)	Gold (g/t)
DH-13	3057N/5138E	110°/-45°	57.0-60.0	3.0	2.90
			87.0-90.0	3.0	1.19
DH-14	3005N/5124E	110°/-45°	44.0-61.0	17.0	7.06
			incl. 47.0-53.0	6.0	16.37
			and 52.0-53.0	1.0	56.55
DH-15	3005N/5124E	110°/-70°	62.0-70.0	8.0	6.53
			80.0-82.0	2.0	2.06

Trenching and drilling have confirmed gold mineralization at Golouma South along a minimum strike extent of 200 metres within a NE-SW trending soil anomaly traceable for over 3,000 metres within the much broader Golouma gold anomaly. Drill results display excellent correlation to a

minimum vertical depth of 100 metres. Reported core intervals are not true widths. Oromin is planning additional excavator trenching and drilling along the mineralized trend both to the NE, SW and down-dip of the holes drilled to date.

Previous Results

Since the commencement of Oromin's USD\$8 million comprehensive exploration program at Sabodala, a huge amount of geochemical, geophysical, rock and drill core data has been collected with very encouraging results. In excess of thirty new prospecting discoveries have been identified throughout the Sabodala exploration concession with a distance of 17.0 kilometres between the northernmost and southernmost. Through trenching and drilling, Oromin has discovered two new gold zones (Golouma West and Golouma South), has confirmed and expanded the previously known Masato Deposit and has discovered and expanded the southern extension of the Niakafiri Deposit located on the adjacent property of Mineral Deposits Limited. Oromin will continue its ongoing exploration through the rainy season to expedite its property-wide evaluation of the Sabodala exploration concession.

The following tables summarise some of the previously announced results from Golouma West and Golouma South. The attached map shows the general location of these drill holes.

Golouma West

Drill Hole (DH) or Trench (TR)	Grid Co-ordinates	Azimuth/ Dip	From – To (m)	Interval (m)	Gold (g/t)
DH-01	3616N/4569E	010°/-45°	18.0 – 29.0	11.0	2.77
			incl. 23.0 – 26.0	3.0	4.71
			41.0 – 43.0	2.0	3.03
DH-02	3590N/4576E	010°/-45°	21.0 – 24.0	3.0	9.43
			41.0 – 43.0	2.0	2.49
TR-02	3636N/4673E	180°	39.0-59.0	20.0	1.73
TR-04	3670N/4566E	185°	19.0-35.0	16.0	7.08
TR-30	3787N/4467E	090°	1.0 – 32.0	31.0	1.93
			incl. 1.0 – 17.0	16.0	3.52

Golouma South

Drill Hole (DH) or Trench (TR)	Grid Co-ordinates	Azimuth/Dip	From – To (m)	Interval (m)	Gold (g/t)
DH-03	3016N/5161E	110°/-45°	0-30.0	30.0	2.42
			incl. 11.0-26.0	15.0	4.55
			incl. 15.0-19.0	4.0	14.02
DH-11	3035N/5130E	110°/-45°	40.0-63.0	23.0	6.64
			incl. 40.0-48.0	8.0	11.75
			and 55.0-58.0	3.0	17.23
			76.0-77.0	1.0	4.36

Drill Hole (DH) or Trench (TR)	Grid Co-ordinates	Azimuth/Dip	From – To (m)	Interval (m)	Gold (g/t)
DH-12	3035N/5130E	110°/-70°	45.0-58.0	13.0	2.84
			incl. 53.0-57.0	4.0	4.81
			79.0-87.0	8.0	1.30
TR-18	3012N/5144E	110°	12.0-37.0	25.0	12.35
TR-20	3085N/5192E	130°	8.0-15.0	7.0	1.19
TR-49	3026N/5204E	315°	12.0-24.0	12.0	3.60
			incl. 17.0-22.0	5.0	7.90
TR-51	2989N/5135E	110°	33.0-42.0	9.0	35.29
			incl. 39.0-40.0	1.0	283.4


All fieldwork was carried out under the supervision of Gerald McArthur P. Geol., a “qualified person” for the purposes of National Instrument 43-101, who has also verified the data disclosed in this news release. TSL Laboratories in Saskatoon, Saskatchewan carried out all assaying.

To find out more about **Oromin Explorations Ltd. (TSX-V:OLE)**, visit www.oromin.com.

**On behalf of the Board of Directors of
OROMIN EXPLORATIONS LTD.**

“Chet Idziszek”
Chet Idziszek, President

THE TSX VENTURE EXCHANGE HAS NOT REVIEWED AND DOES NOT ACCEPT RESPONSIBILITY
FOR THE ADEQUACY AND ACCURACY OF THIS RELEASE

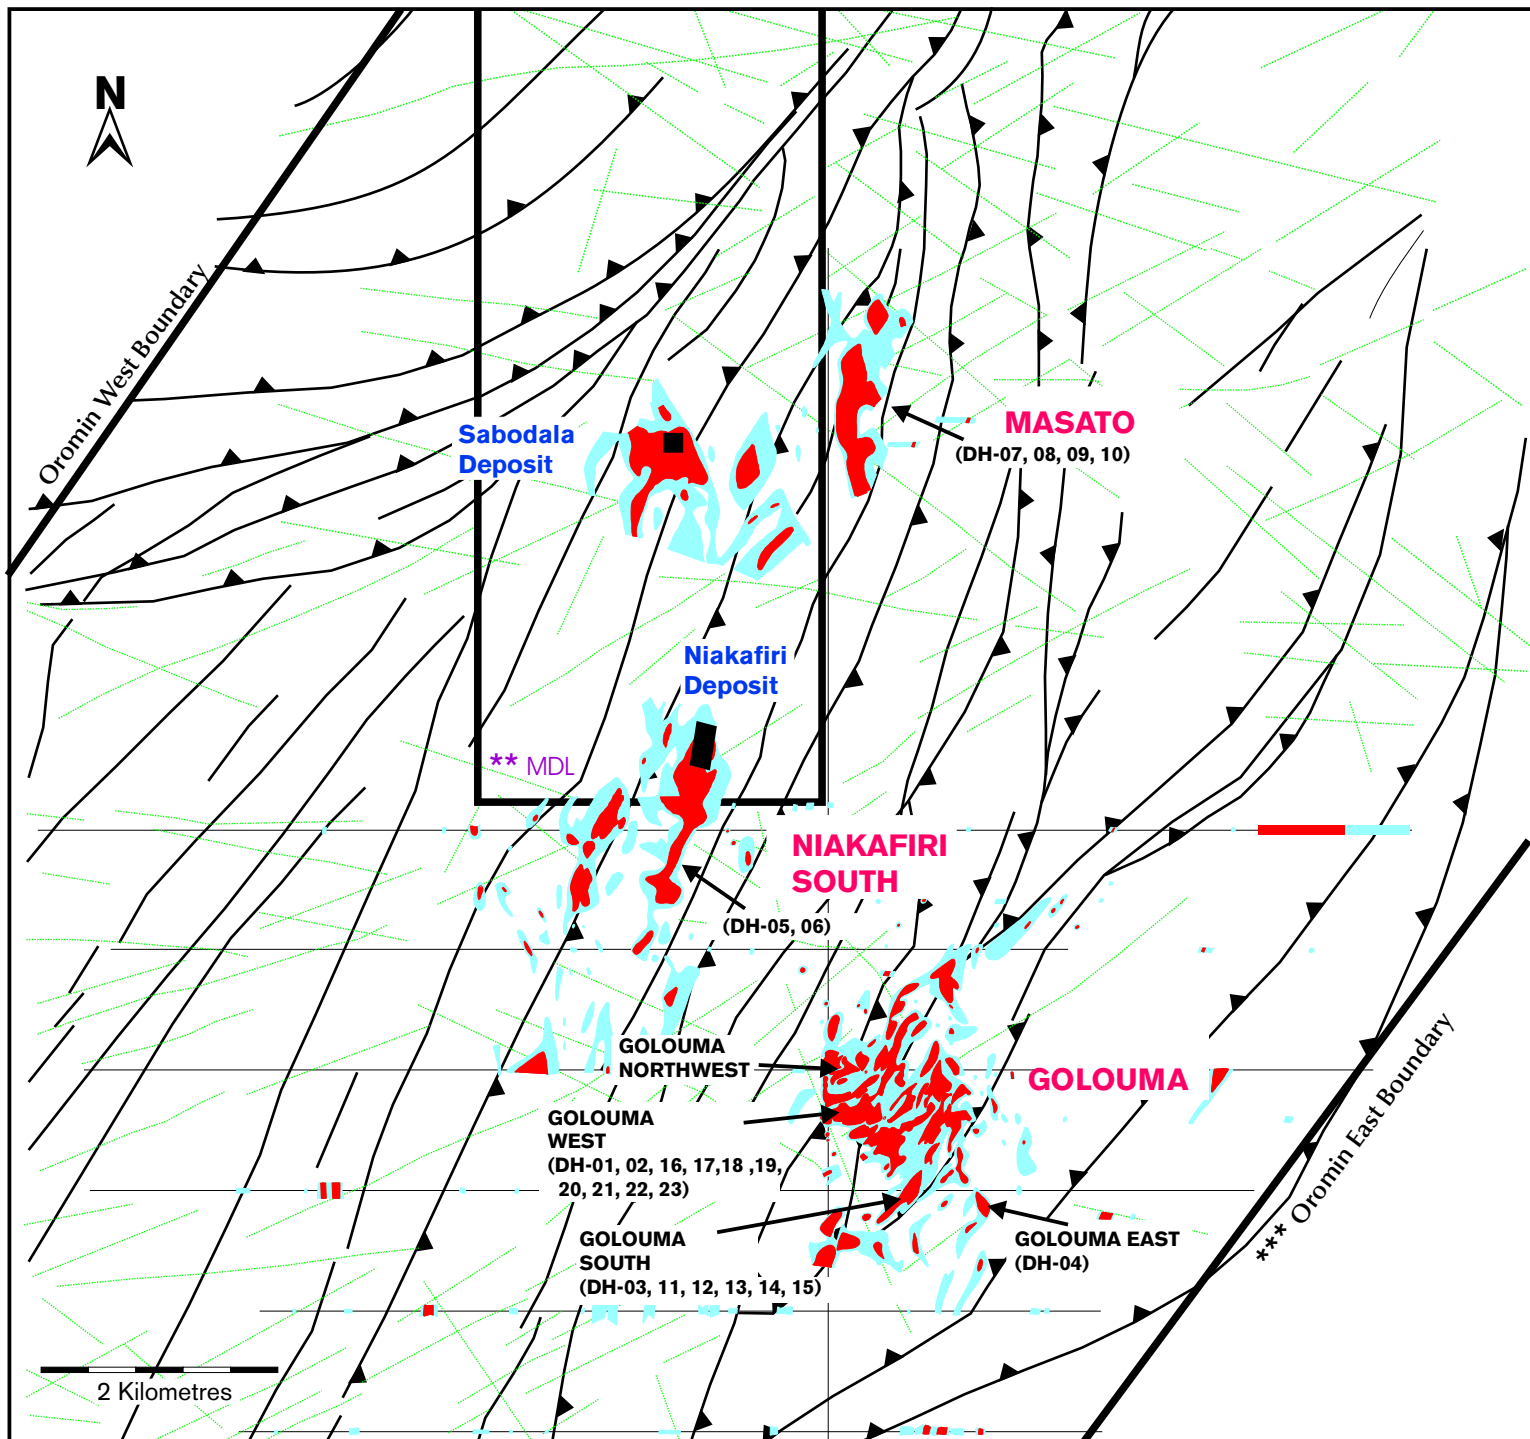

Legend

* Soil Geochemistry

Interpreted Structure

Drill Hole

- >150 ppb Au
- > 50 ppb Au



DH-#

- * Oromin & BRGM Data
- ** MDL Concession (20.7 sq/km)
- *** Oromin Concession (230 sq/km)

Oromin Explorations Ltd.

Sabodala Project Compilation Map

June 2006