

**FORM 51-102F3
MATERIAL CHANGE REPORT**

Item Name and Address of Company

Freeman Gold Corp. (the “Company”)
Suite 1570, 505 Burrard Street
Vancouver, British Columbia
Canada V7X 1M5

Item 2 Date of Material Change

October 5, 2021

Item 3 News Release

The Company disseminated a news release announcing the material change described herein through the news dissemination services of Canada Newswire on October 5, 2021, and a copy was subsequently filed on SEDAR.

Item 4 Summary of Material Change

The Company provided results from initial metallurgical testing on drill core material from its Lemhi Gold Project in Idaho. The test work has shown consistently high gold extractions exceeding 95% over a wide spatial area for a range of head grades that vary between 0.4 to 2.1 g/t Au. The excellent leach response indicates that cyanide tank leaching, with a moderately ground sample using a gravity pre-treatment and leached for approximately 36 hours, results in gold recoveries up to 98%. The generated data will be employed towards future economic calculations for the in-pit resource that was released on July 8, 2021.

Item 5 Full Description of Material Change

5.1 Full Description of Material Change

Please see the news release attached as schedule "A" for a full description of the material change.

5.2 Disclosure for Restructuring Transactions

Not applicable

Item 6 Reliance on subsection 7.1(2) of National Instrument 51-102

The report is not being filed on a confidential basis.

Item 7 Omitted Information

There are no significant facts required to be disclosed herein which have been omitted.

Item 8 Executive Officer

For further information, please contact William Randall, President and Chief Executive Officer of the Company, at 604-687-7130.

Item 9 Date of Report

October 5, 2021



Schedule "A"

FREEMAN GOLD REPORTS >95% GOLD RECOVERIES IN INITIAL METALLURGICAL TESTING FOR THE LEMHI GOLD PROJECT

- **Conventional tank leach processing achieves recoveries up to 98%**
- **Leach response and recoveries consistent over wide spatial area, depth and head grades**
- **Continuing testwork to confirm recoveries over larger spatial area ahead of economic studies**

CANADIAN SECURITIES EXCHANGE: FMAN

FOR IMMEDIATE RELEASE

VANCOUVER, BRITISH COLUMBIA – October 5, 2021 – Freeman Gold Corp. (CSE: FMAN, OTCQB: FMANF, FSE: 3WU) (“**Freeman**” or the “**Company**”) is pleased to report results from initial metallurgical testing on drill core material from its Lemhi Gold Project in Idaho. The test work has shown consistently high gold extractions exceeding 95% over a wide spatial area for a range of head grades that vary between 0.4 to 2.1 g/t Au. The excellent leach response indicates that cyanide tank leaching, with a moderately ground sample using a gravity pre-treatment and leached for approximately 36 hours, results in gold recoveries up to 98%. The generated data will be employed towards future economic calculations for the in-pit resource that was released on July 8, 2021.

“We are extremely pleased with the initial metallurgical results,” commented Paul Matysek, Executive Chairman. “The metallurgical results to date suggests that the oxide zone potentially continues at depth. This bodes well for the discovery of additional oxide material along strike and below the current resource.”

The gold processing plan was developed and supervised by independent consulting metallurgist Mr. Frank Wright, P.Eng., of F. Wright Consulting Inc. Mr. Wright is a professional engineer and Qualified Person as defined by National Instrument 43-101 with over 25 years experience in the fields of mineral processing and hydrometallurgy. He has been principally involved in formulating the process philosophy and related flowsheet development that are suitable for advancing mineral projects into full economic evaluation. This has included studies for a variety of producers and exploration companies globally in the precious and base metal mining industry over the last three decades.

Mr. Wright states that, “The leach response at Lemhi has consistently, over a wide spatial area and grade range of the resource, provided gold recoveries in the mid to upper 90% range. The initial metallurgical response is very encouraging and strongly supports continued studies to advance the property into a preliminary economic assessment.”

2021 Metallurgical Program

Freeman’s 2021 metallurgical program consisted of two phases and was performed by SGS Mineral Services of Burnaby BC (“**SGS**”). The program ran tests on fourteen intervals and composites obtained from archived assay rejects originating from 2012 diamond drill core (Phase 1) and from two 2020 PQ diamond drill core intervals (Phase 2). These samples were used for both comminution and leach studies. The drill holes selected are distributed over a significant area of the resource and include samples at depths

of 202 metres below surface (Figure 1). Figure 1 also includes drill holes selected for further metallurgical test work.

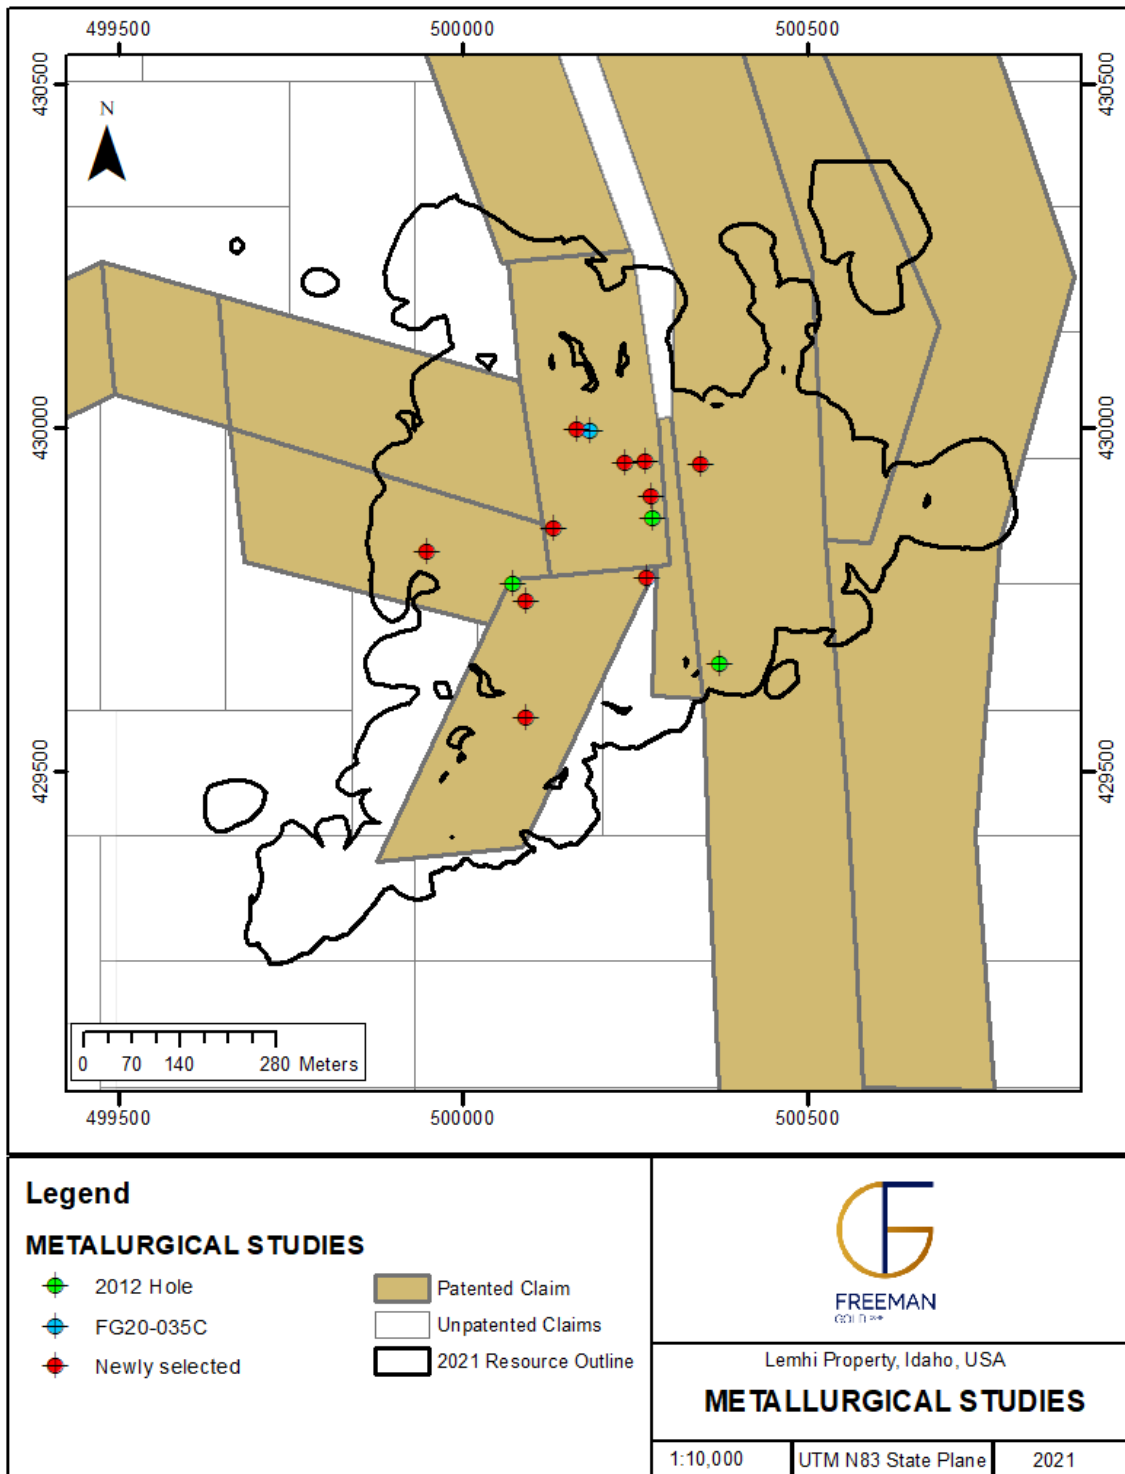


Figure 1 – Selected Lemhi diamond drill holes for metallurgical testing composites

As further described in the Company's press release dated January 19, 2021, historical metallurgical test work had been performed in the 1990s by Kappes Cassiday and Associates, of Reno, Nevada. This work primarily focused on column leach testing to evaluate the merits of a heap leach facility. It resulted in an

overall gold recovery averaging 70%, although near surface and higher grade materials provided significantly higher recovery. Based on this work the indicated equivalent heap retention would be well over 100 days.

Given the results of the historical testing, the bulk of the 2021 metallurgical program was directed primarily to evaluate tank leach procedures, suitable to carbon in pulp (CIP) treatment. This extractive process was pursued due to Lemhi's coarse grain gold component and overall higher gold grade nature as compared to a typical heap leach operation. CIP is well suited to deposits of this type in higher gold price environments. Heap leach is still being considered an option for lower grade materials.

SGS laboratory findings to date indicate that over a range of potential mill feed grades gold recovery from tank leaching ranges between 95% to 98%. This was achieved under moderate operating conditions using a leach feed particle size of approximately 80% passing 110 microns. Preliminary comminution work index testing has also shown the resource material exhibits rock of an average hardness for crushing and grinding at depth and softer near surface.

Pre-treatment of the leach feed by centrifugal gravity concentration suggests one-third or more of the gold present may be recovered into an uncleaned gravity concentrate, suitable for intense cyanidation. This is relevant given the corresponding head grades indicate a significant portion of gold occurs as coarse particles.

Cyanide bottle roll testing was initially performed on archived 2012 assay rejects at various particle sizes. Leach conditions adjusted pH with lime to pH 10.5, maintaining 1.5 g/L NaCN to start and operated for up to 48 hours. Various grind particle size were tested between 80% passing 80 microns to 200 microns, with a leach response consistently higher than 90% recovery. Subsequently, three master composites were compiled to represent low grade (LG=0.46 g/t Au), mid grade (MG=0.74 g/t Au) and high grade (HG=1.22 g/t Au) material. At a targeted feed grind of 80% passing 110 microns and 48 hours of leaching the resulting leach residue grades were between 0.02 to 0.07 g/t Au. This corresponded to a gold extraction for all three composites between 95% to 98%, indicating a consistent leach response over a wide range of head grades. Further the leach kinetics show that most of the gold dissolution occurs rapidly as shown in Figure 2.

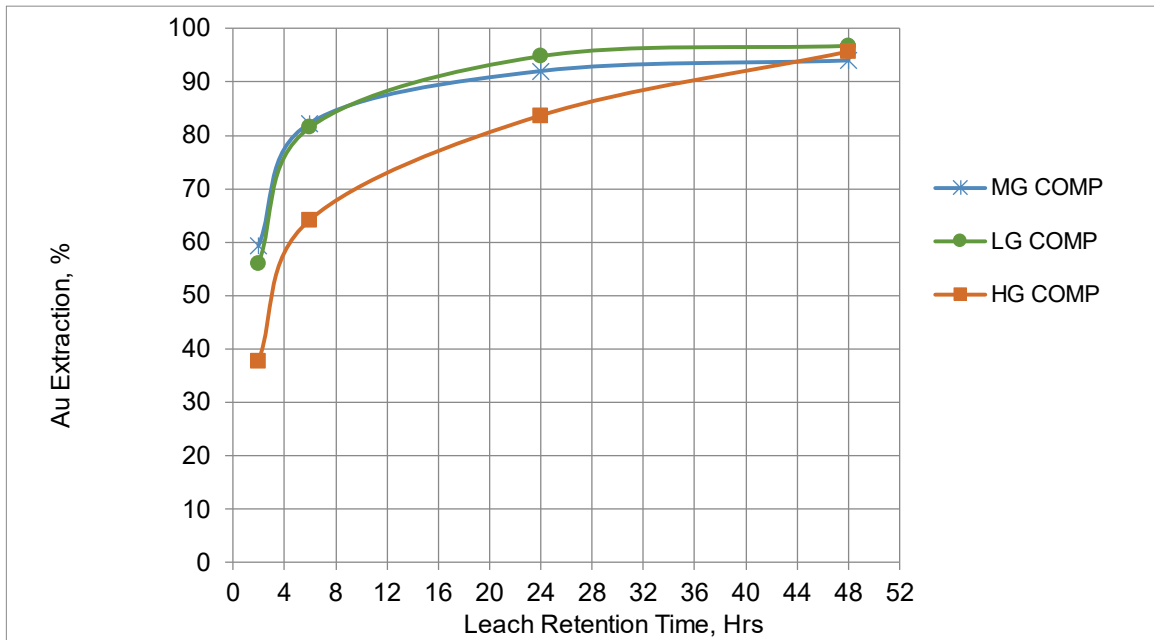


Figure 2 – Gold leach kinetic curves for low grade (LG), mid grade (MG) and high grade (HG) material from Lemhi Project

The kinetic curves in Figure 2 suggest a leach retention time of approximately 36 hours is appropriate, although higher grade samples may benefit from extended leach times. A similar test was performed for composites derived from the 2020 drill core which resulted in 96% gold recovery.

Preliminary laboratory data also suggests that sulphide bearing material, including pyrite or chalcopyrite intervals, could produce a potentially marketable flotation concentrate containing gold, along with flotation tailing suitable for CIP. This may become important should future exploration identify a resource in oxide transition into sulphide materials at depth.

Further metallurgical test work (Phase 3) is slated to begin later this month at SGS on a further 27 composites of assay rejects. These rejects were obtained from split drill core intervals from the 2020 exploration program and average ~4-5 m in length to represent wide spatial areas and depths of the existing resource. These variability studies will help optimize process conditions for tank leaching and provide sufficient data in support of the undertaking of a preliminary economic evaluation of the project.

About the Company

Freeman Gold Corp. is a mineral exploration company focused on the development of its 100% owned Lemhi Gold property (the “**Lemhi Project**”). The Lemhi Project comprises 30 square kilometers of highly prospective land. The project hosts a near surface, shallow, high grade oxide gold resource. The pit constrained National Instrument 43-101 compliant mineral resource estimate is comprised of 749,800 oz gold (“**Au**”) at 1.02 grams per tonne (“**g/t**”) in 22.94 million tonnes (Indicated) and 250,300 oz Au at 1.01 g/t Au in 7.83 million tonnes (Inferred). The Company is focused on growing and advancing the Lemhi Project towards a production decision. The technical content of this news release has been reviewed and approved by Dean Besserer, P.Geol., VP Exploration of the Company and a Qualified Person as defined by National Instrument 43-101.

On Behalf of the Company
William Randall
President & CEO

For further information, please visit the Company’s website at www.freemangoldcorp.com or contact Mr. Tom Panoulis at 416-294-5649 or by email at: tom@freemangoldcorp.com

Forward Looking Statements: This press release contains “forward-looking information or statements” within the meaning of Canadian securities laws, which may include, but are not limited to statements relating to its future business plans. All statements in this release, other than statements of historical facts, that address events or developments that the Company expects to occur, are forward-looking statements. Forward-looking statements are statements that are not historical facts and are generally, but not always, identified by the words “expects,” “plans”, “anticipates”, “believes”, “intends”, “estimates”, “projects”, “potential” and similar expressions, or that events or conditions “will”, “would”, “may”, “could” or “should” occur. Although the Company believes the expectations expressed in such forward-looking statements are based on reasonable assumptions, such statements are not guarantees of future performance and actual results may differ from those in the forward-looking statements. Such forward-looking information reflects the Company’s views with respect to future events and is subject to risks, uncertainties, and assumptions. The Company does not undertake to update forward-looking statements or forward-looking information, except as required by law.

Neither the Canadian Securities Exchange nor its regulation services provider accepts responsibility for the adequacy or accuracy of this release.