


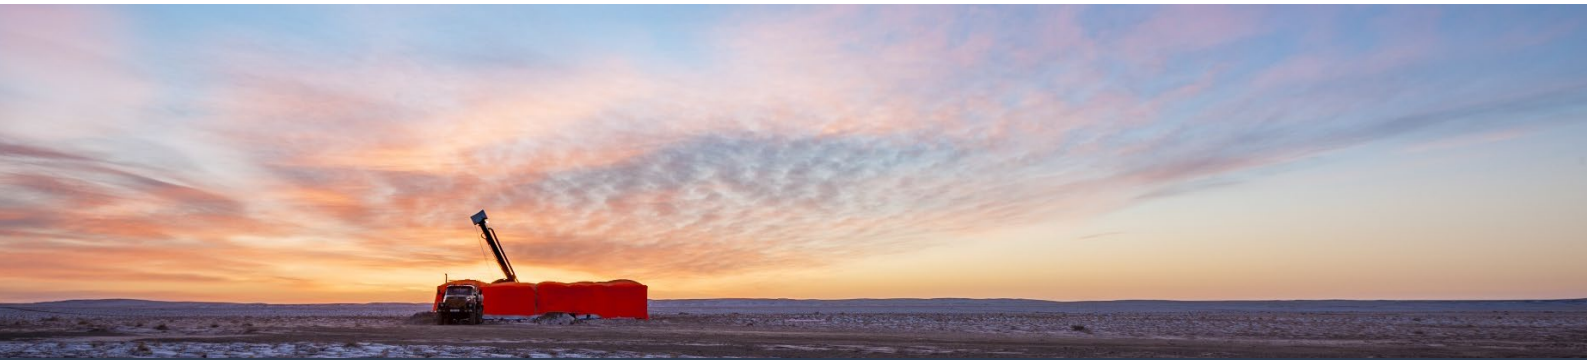

XANADU ACCELERATES 2021 EXPLORATION PROGRAM

3 June 2021

Xanadu Mines Ltd (**ASX: XAM, TSX: XAM**) ("Xanadu" or "the Company") is pleased to update the market on its on-going exploration program for porphyry copper and gold deposits at the Kharmagtai District in the South Gobi region of Mongolia.

Highlights

- 23,000 metres of diamond drilling planned for completion by Q4 of CY2021, utilising three drill rigs
- Funded Exploration Program with three key components:
 - High-Grade Definition Program - define scale and tenor of gold-rich, bornite zones underneath current Stockwork Hill, White Hill and Copper Hill resources
 - Discovery Drilling Program - drilling of priority targets to identify new discoveries within the Kharmagtai District; and
 - Resource Upgrade Program - targeting a resource upgrade beneath the current resource and including large-scale mineralisation at Zaraa
- Targeting approach will utilise data from recent drilling, geophysics, and multispectral core scanning technology on site
- Resource modelling to commence in Q4 of CY2021, on completion of the drill program
- Currently testing deeper extensions at White Hill and Stockwork Hill using 3 drill rigs

Xanadu's Chief Executive Officer, Dr Andrew Stewart, said "Xanadu is well capitalised to pursue its exploration program for 2021, aiming to create material value and growth within the Kharmagtai District. Recent exploration successes have confirmed an exciting potential to expand the higher-grade resource and unlock the next stage of development in this district. Our 23,000 metres drilling program will test this potential, and we look forward to updating the market as our program develops."

Exploration Program

Xanadu has set a goal targeting an increase of the combined Kharmagtai resource to >1 billion tonnes @ $\geq 0.5\%$ copper equivalent (CuEq) including >100 million tonnes @ $\geq 0.8\%$ CuEq, with the aim of enabling future development of the Kharmagtai District.

The 23,000-metre drilling program at Kharmagtai is designed around delivery of this goal, with detailed objectives including:

1. High-Grade Definition Program – define scale and tenor of gold-rich, bornite zones identified underneath current Stockwork Hill, White Hill and Copper Hill resources;
2. Discovery Drilling Program – drilling of priority targets to identify new discoveries on the Kharmagtai District; and
3. Resource Upgrade Program – targeting a resource upgrade resource to >1 billion tonnes @ $\geq 0.5\%$ CuEq including >100 million tonnes @ $\geq 0.8\%$ CuEq. Define to Indicated status beneath the current resource and large-scale mineralisation at Zaraa.

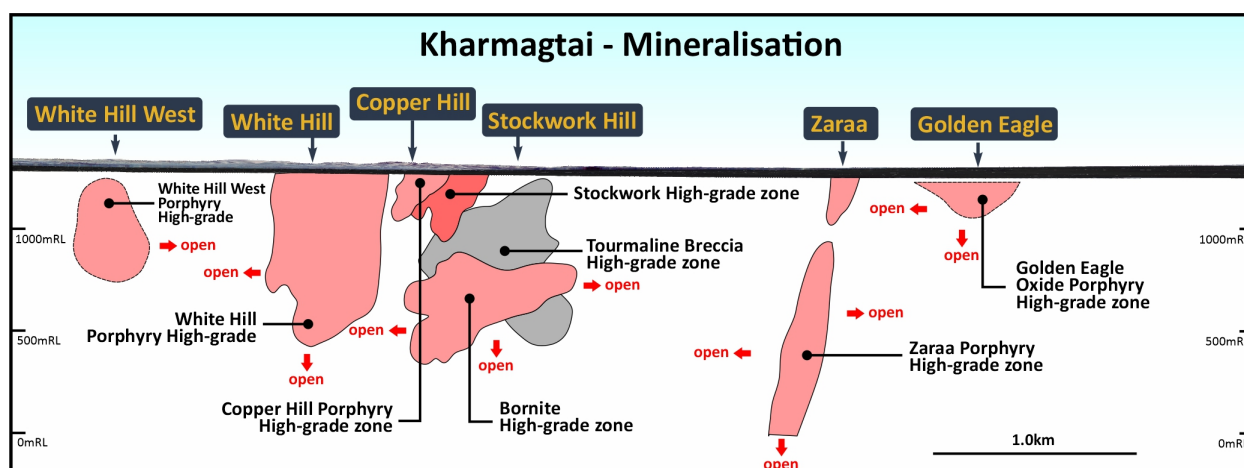


Figure 1. Kharmagtai District Long Section - Known Mineralisation

Current Drilling

The Exploration Program is currently underway with three active diamond drills - KHDDH569, KHDDH570 and KHDDH571 (**Figure 2**).

Current drill hole KHDDH571 aims to test the western extension of the gold-rich, bornite zone under Stockwork hill.

Deeper extension of mineralisation under White Hill will be tested by current drill hole KHDDH569.

Current drill hole KHDDH570 will test the eastern extent of Zaraa mineralisation.

Drill holes KHDDH567 and KHDDH568 are both completed and pending assay results.

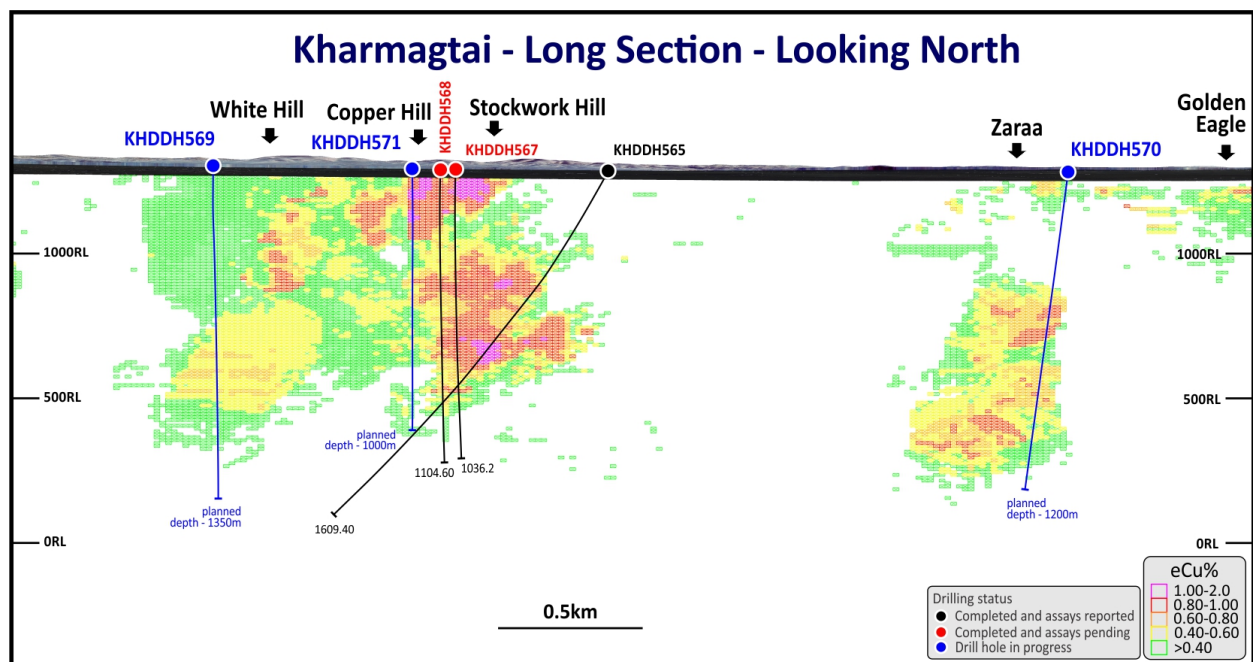


Figure 2. Current and Recent Drilling Long Section

High Grade Definition Program

The drilling program beneath the existing resource focuses directly on delivering the goal of >100Mt at 0.8% CuEq. Drilling will focus on deeper, gold-rich, high grade zones under Stockwork Hill, White Hill and Copper Hill (see purple mineralisation in **Figure 3**), which are key to achieving this goal.

Results to date beneath the existing Stockwork Hill resource indicate a zone of mineralisation at $>1\%$ CuEq, which is relatively long and narrow, shaped similar to a flattened cigar laying at an angle. Assay results from recent drill hole KHDDH565 have more than doubled the potential length of this mineralisation.

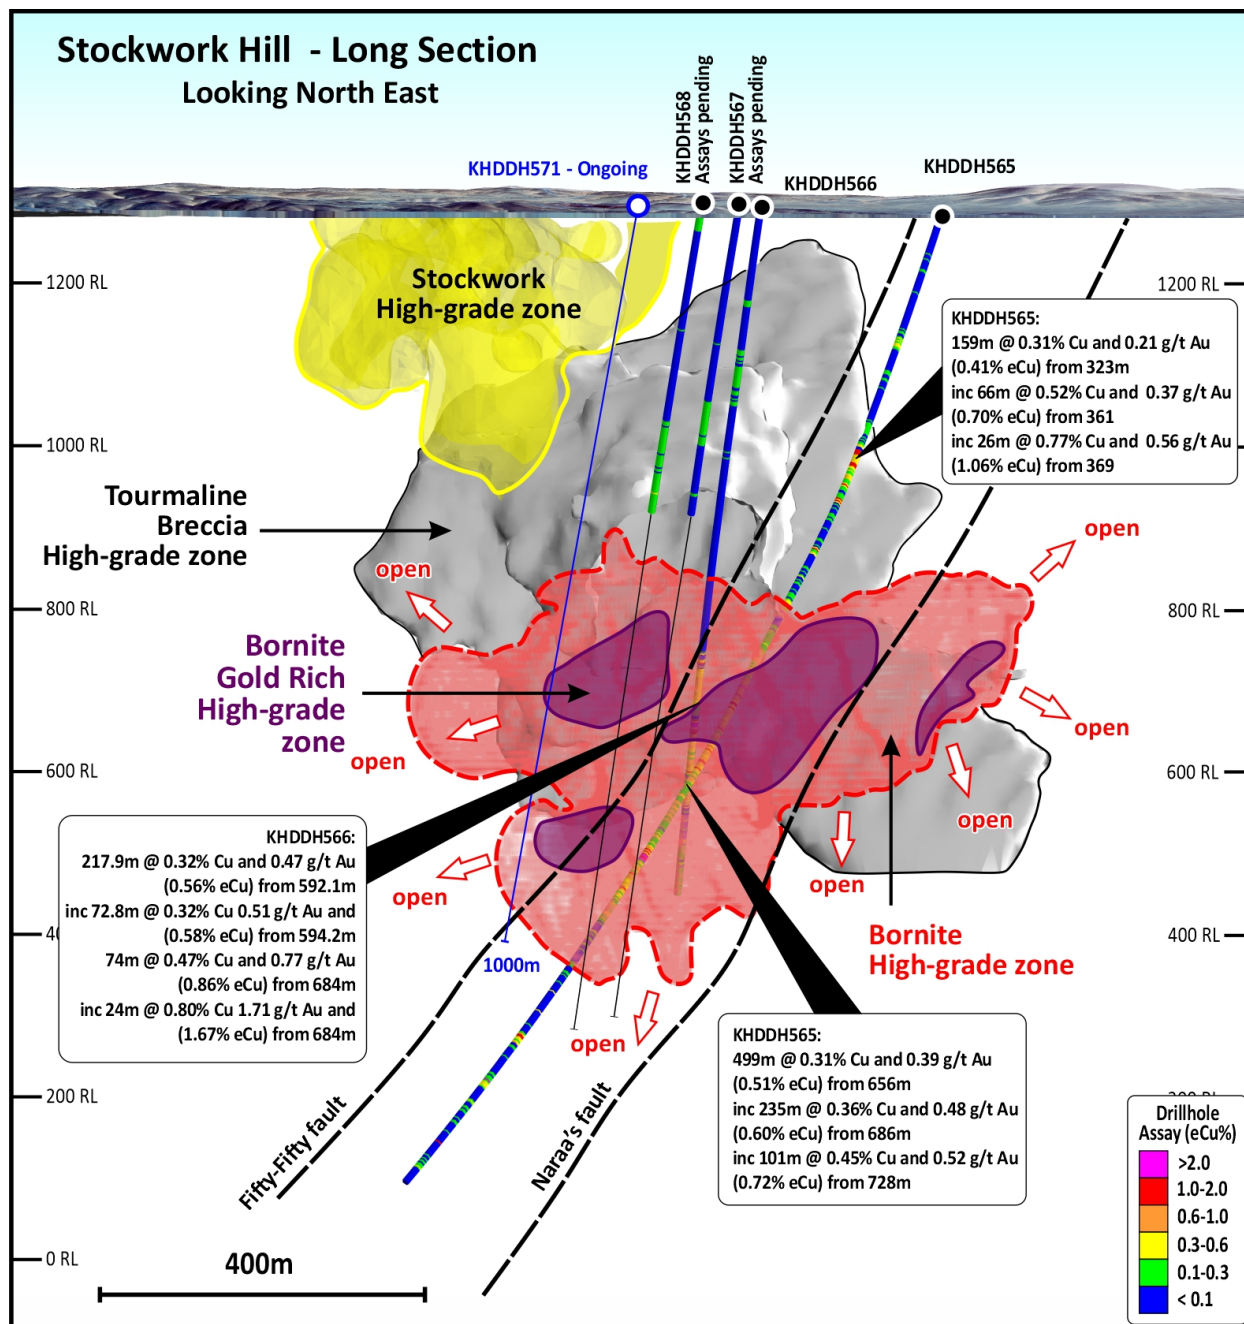


Figure 3. Stockwork Hill Long Section - Current and Recent Drilling

(see ASX Announcement Dated 28 May 2021 for KHDDH565 and 566 assay results)

[illegible]

Figure 4. Existing Resource Plan View – Current Drilling Locations

Xanadu will methodically test these gold-rich, bornite zones in 2021. To target its drilling, Xanadu will utilise data from the drilling it completed in 2020 and early 2021 and improved data from the core scanning technology now in place at Kharmagtai.

Discovery Drilling Program

Discoveries to date show that Kharmagtai is a district that hosts a complex system of copper-gold porphyries intrusions. As a result, Kharmagtai cannot be treated as a single deposit, and it remains prospective for new discovery across its 70 square kilometre license area.

Xanadu has identified several priority targets for new discovery to be drilled during the CY2021 program (**Figure 5**). Following completion of current drill holes at Stockwork Hill and Zaraa, Xanadu's intention is for one drill rig to be focused on discovery drilling.

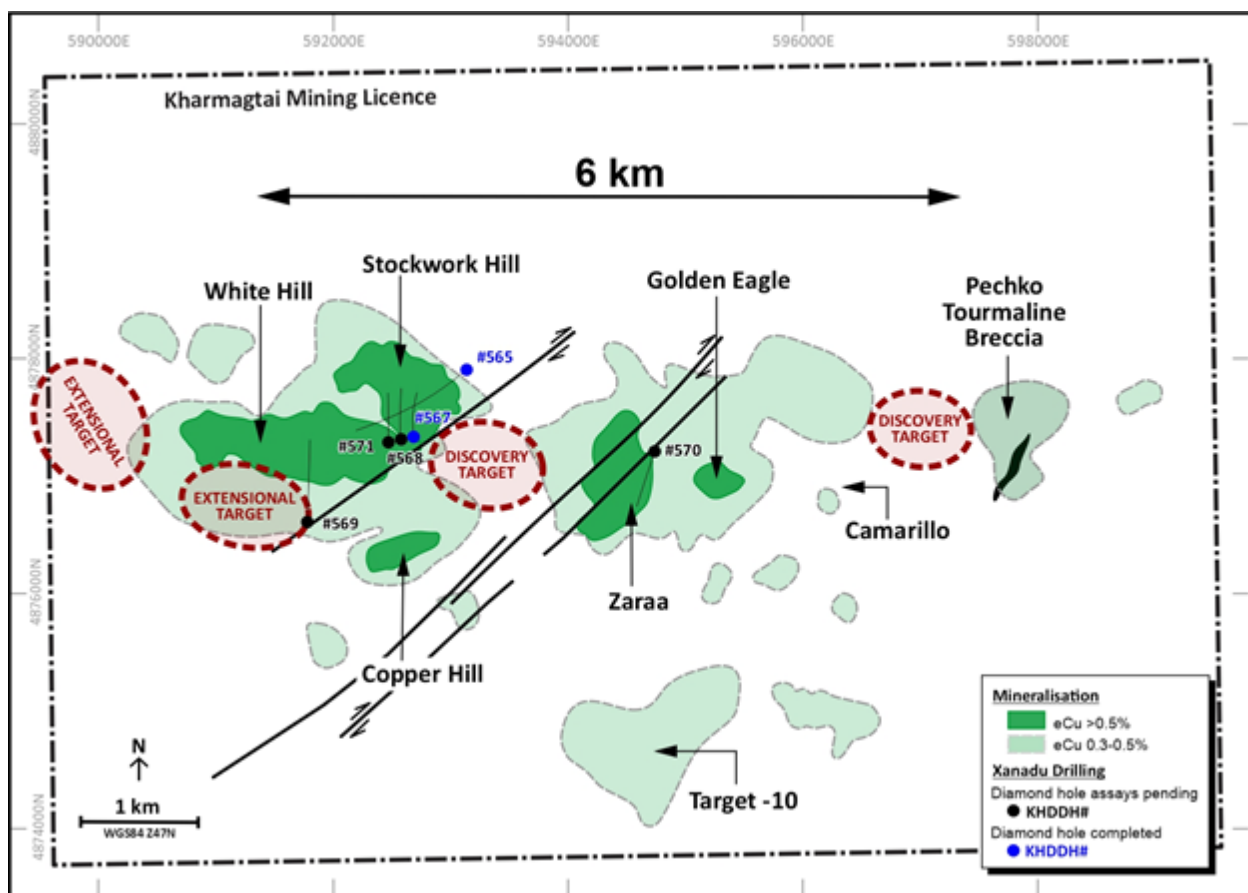


Figure 5. Kharmagtai District Plan View - Target Areas and Current Drilling

Timeline

The 2021 Exploration Program for the Kharmagtai District will be largely completed by early Q4, CY2021. Drill results will be published regularly during the program, with 5 monthly announcements anticipated between June and October 2021. The drill program will initially focus on high grade zones under Stockwork Hill, White Hill and Zaraa deposits.

Xanadu will design dual purpose drilling where possible to deliver specific intercepts and to provide the necessary data to define resources to Indicated status. Modelling to update the 2018 Mineral Resource Estimate (please refer to ASX Announcement dated 31 October 2018) will commence in Q4, CY2021.

About Xanadu Mines

Xanadu is an ASX and TSX listed Exploration company operating in Mongolia. We give investors exposure to globally significant, large scale copper-gold discoveries and low-cost inventory growth. Xanadu maintains a portfolio of exploration projects and remains one of the few junior explorers on the ASX or TSX who control an emerging Tier 1 copper-gold deposit in our flagship Kharmagtai project. For information on Xanadu visit: www.xanadumines.com.

Andrew Stewart

CEO

Xanadu Mines Ltd

Andrew.stewart@xanadumines.com

+61 409 819 922

This Announcement was authorised for release by Xanadu's Board of Directors.

Appendix 2: Statements and Disclaimers

Mineral Resources and Ore Reserves Reporting Requirements

The 2012 Edition of the *Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves* (the **JORC Code 2012**) sets out minimum standards, recommendations and guidelines for Public Reporting in Australasia of Exploration Results, Mineral Resources and Ore Reserves. The Information contained in this Announcement has been presented in accordance with the JORC Code 2012.

Competent Person Statement

The information in this announcement that relates to exploration results is based on information compiled by Dr Andrew Stewart, who is responsible for the exploration data, comments on exploration target sizes, QA/QC and geological interpretation and information. Dr Stewart, who is an employee of Xanadu and is a Member of the Australasian Institute of Geoscientists, has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as the "Competent Person" as defined in the 2012 Edition of the *Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves* and the *National Instrument 43-101*. Dr Stewart consents to the inclusion in the report of the matters based on this information in the form and context in which it appears.

Copper Equivalent Calculations

The copper equivalent (CuEq or **eCu**) calculation represents the total metal value for each metal, multiplied by the conversion factor, summed, and expressed in equivalent copper percentage with a metallurgical recovery factor applied. The copper equivalent calculation used is based off the eCu calculation defined by CSA in the 2018 Mineral Resource Upgrade.

Copper equivalent (CuEq or **eCu**) grade values were calculated using the following formula:

$$\text{eCu} = \text{Cu} + \text{Au} * 0.62097 * 0.8235,$$

Where Cu = copper grade (%); Au = gold grade (gold per tonne (**g/t**)); 0.62097 = conversion factor (gold to copper); and 0.8235 = relative recovery of gold to copper (82.35%).

The copper equivalent formula was based on the following parameters (prices are in USD): Copper price = 3.1 \$/lb (or 6,834 \$ per tonne (**\$/t**)); Gold price = 1,320 \$ per ounce (**\$/oz**); Copper recovery = 85%; Gold recovery = 70%; and Relative recovery of gold to copper = 70% / 85% = 82.35%.

Forward-Looking Statements

Certain statements contained in this Announcement, including information as to the future financial or operating performance of Xanadu and its projects may also include statements which are 'forward-looking statements' that may include, amongst other things, statements regarding targets, estimates and assumptions in respect of mineral reserves and mineral resources and anticipated grades and recovery rates, production and prices, recovery costs and results, capital expenditures and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions. These 'forward-looking statements' are necessarily based upon a number of estimates and assumptions that, while considered reasonable by Xanadu, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies and involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements.

Xanadu disclaims any intent or obligation to update publicly or release any revisions to any forward-looking statements, whether as a result of new information, future events, circumstances or results or otherwise after the date of this Announcement or to reflect the occurrence of unanticipated events, other than required by the *Corporations Act 2001 (Cth)* and the Listing Rules of the Australian Securities Exchange (**ASX**) and Toronto Stock Exchange (**TSX**). The words 'believe', 'expect', 'anticipate', 'indicate', 'contemplate', 'target', 'plan', 'intends', 'continue', 'budget', 'estimate', 'may', 'will', 'schedule' and similar expressions identify forward-looking statements.

All 'forward-looking statements' made in this Announcement are qualified by the foregoing cautionary statements. Investors are cautioned that 'forward-looking statements' are not guarantee of future performance and accordingly investors are cautioned not to put undue reliance on 'forward-looking statements' due to the inherent uncertainty therein.

For further information please visit the Xanadu Mines' Website at www.xanadumines.com.

Appendix 3: Kharmagtai Table 1 (JORC 2012)

Set out below is Section 1 and Section 2 of Table 1 under the JORC Code, 2012 Edition for the Kharmagtai project. Data provided by Xanadu. This Table 1 updates the JORC Table 1 disclosure dated 11 April 2019.

JORC TABLE 1 - SECTION 1 - SAMPLING TECHNIQUES AND DATA

(Criteria in this section apply to all succeeding sections).

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i>	- Representative ½ core samples were split from PQ, HQ & NQ diameter diamond drill core on site using rock saws, on a routine 2m sample interval that also honours lithological/intrusive contacts. - The orientation of the cut line is controlled using the core orientation line ensuring uniformity of core splitting wherever the core has been successfully oriented. - Sample intervals are defined and subsequently checked by geologists, and sample tags are attached (stapled) to the plastic core trays for every sample interval. - RC chip samples are ¼ splits from one meter intervals using a 75%:25% riffle splitter to obtain a 3kg sample - RC samples are uniform 2m samples formed from the combination of two ¼ split 1m samples.
Drilling techniques	<i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type,</i>	- The Mineral Resource estimation has been based upon diamond drilling of PQ, HQ and NQ diameters with both standard and triple tube core recovery configurations, RC drilling and surface trenching with channel sampling. - All drill core drilled by Xanadu has been

Criteria	JORC Code explanation	Commentary
	<i>whether core is oriented and if so, by what method, etc.).</i>	oriented using the "Reflex Ace" tool.
Drill sample recovery	• <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	• Diamond drill core recoveries were assessed using the standard industry (best) practice which involves: removing the core from core trays; reassembling multiple core runs in a v-rail; measuring core lengths with a tape measure, assessing recovery against core block depth measurements and recording any measured core loss for each core run. • Diamond core recoveries average 97% through mineralization. • Overall, core quality is good, with minimal core loss. Where there is localized faulting and or fracturing core recoveries decrease, however, this is a very small percentage of the mineralized intersections. • RC recoveries are measured using whole weight of each 1m intercept measured before splitting • Analysis of recovery results vs grade shows no significant trends that might indicate sampling bias introduced by variable recovery in fault/fracture zones.
Logging	• <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i>	• All drill core is geologically logged by well-trained geologists using a modified "Anaconda-style" logging system methodology. The Anaconda method of logging and mapping is specifically designed for porphyry Cu-Au mineral systems and is entirely appropriate to support Mineral Resource Estimation, mining, and metallurgical studies. • Logging of lithology, alteration and mineralogy is intrinsically qualitative in nature. However, the logging is subsequently supported by 4 Acid ICP-MS (48 element) geochemistry and SWIR spectral mineralogy (facilitating semi-quantitative/calculated mineralogical, lithological and alteration classification) which is integrated with the logging to improve cross section interpretation and 3D geological model development. • Drill core is also systematically logged for both geotechnical features and geological structures. Where drill core has been successfully oriented, the orientation of

Criteria	JORC Code explanation	Commentary
		structures and geotechnical features are also routinely measured. Both wet and dry core photos are taken after core has been logged and marked-up but before drill core has been cut.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality, and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	- All drill core samples are ½ core splits from either PQ, HQ or NQ diameter cores. A routine 2m sample interval is used, but this is varied locally to honour lithological/intrusive contacts. The minimum allowed sample length is 30cm. - Core is appropriately split (onsite) using diamond core saws with the cut line routinely located relative to the core orientation line (where present) to provide consistency of sample split selection. - The diamond saws are regularly flushed with water to minimize potential contamination. - A field duplicate ¼ core sample is collected every 30th sample to ensure the “representivity of the in-situ material collected”. The performance of these field duplicates is routinely analysed as part of Xanadu’s sample QC process. - Routine sample preparation and analyses of DDH samples were carried out by ALS Mongolia LLC (ALS Mongolia), who operates an independent sample preparation and analytical laboratory in Ulaanbaatar. - All samples were prepared to meet standard quality control procedures as follows: Crushed to 75% passing 2mm, split to 1kg, pulverised to 85% passing 200 mesh (75 microns) and split to 150g sample pulp. - ALS Mongolia Geochemistry labs quality management system is certified to ISO 9001:2008. - The sample support (sub-sample mass and comminution) is appropriate for the grain size and Cu-Au distribution of the porphyry Cu-Au mineralization and associated host rocks.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	- All samples were routinely assayed by ALS Mongolia for gold - Au is determined using a 25g fire assay fusion, cupelled to obtain a bead, and digested with Aqua Regia, followed by an

Criteria	JORC Code explanation	Commentary
	• <i>For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	atomic absorption spectroscopy (AAS) finish, with a lower detection (LDL) of 0.01 ppm. • All samples were also submitted to ALS Mongolia for the 48-element package ME-ICP61 using a four-acid digest (considered to be an effective total digest for the elements relevant to the MRE). Where copper is over-range (>1% Cu), it is analysed by a second analytical technique (Cu-OG62), which has a higher upper detection limit (UDL) of 5% copper. • Quality assurance has been managed by insertion of appropriate Standards (1:30 samples – suitable Ore Research Pty Ltd certified standards), Blanks (1:30 samples), Duplicates (1:30 samples – ¼ core duplicate) by XAM. • Assay results outside the optimal range for methods were re-analysed by appropriate methods. • Ore Research Pty Ltd certified copper and gold standards have been implemented as a part of QC procedures, as well as coarse and pulp blanks, and certified matrix matched copper-gold standards. • QC monitoring is an active and ongoing processes on batch by batch basis by which unacceptable results are re-assayed as soon as practicable. • Prior to 2014: Cu, Ag, Pb, Zn, As and Mo were routinely determined using a three-acid-digestion of a 0.3g sub-sample followed by an AAS finish (AAS21R) at SGS Mongolia. Samples were digested with nitric, hydrochloric and perchloric acids to dryness before leaching with hydrochloric acid to dissolve soluble salts and made to 15ml volume with distilled water. The LDL for copper using this technique was 2ppm. Where copper was over-range (>1% Cu), it was analysed by a second analytical technique (AAS22S), which has a higher upper detection limit (UDL) of 5% copper. Gold analysis method was essentially unchanged.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	- All assay data QAQC is checked prior to loading into XAM's Geobank data base. - The data is managed by XAM geologists. - The data base and geological interpretation is managed by XAM. - Check assays are submitted to an umpire lab (SGS Mongolia) for duplicate analysis. - No twinned drill holes exist. - There have been no adjustments to any of the assay data.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	- Diamond drill holes have been surveyed with a differential global positioning system (DGPS) to within 10cm accuracy. - The grid system used for the project is UTM WGS-84 Zone 48N - Historically, Eastman Kodak and Flexit electronic multi-shot downhole survey tools have been used at Kharmagtai to collect down hole azimuth and inclination information for the majority of the diamond drill holes. Single shots were typically taken every 30m to 50m during the drilling process, and a multi-shot survey with readings every 3-5m are conducted at the completion of the drill hole. As these tools rely on the earth's magnetic field to measure azimuth, there is some localised interference/inaccuracy introduced by the presence of magnetite in some parts of the Kharmagtai mineral system. The extent of this interference cannot be quantified on a reading-by-reading basis. - More recently (since September 2017), a north-seeking gyro has been employed by the drilling crews on site (rented and operated by the drilling contractor), providing accurate downhole orientation measurements unaffected by magnetic effects. Xanadu have a permanent calibration station setup for the gyro tool, which is routinely calibrated every 2 weeks (calibration records are maintained and were sighted) - The project DTM is based on 1 m contours from satellite imagery with an accuracy of ± 0.1 m.

Criteria	JORC Code explanation	Commentary
Data spacing and distribution	• <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i>	• Holes spacings range from <50m spacings within the core of mineralization to +500m spacings for exploration drilling. Hole spacings can be determined using the sections and drill plans provided. • Holes range from vertical to an inclination of -60 degrees depending on the attitude of the target and the drilling method. • The data spacing and distribution is sufficient to establish anomalism and targeting for porphyry Cu-Au, tourmaline breccia and epithermal target types. • Holes have been drilled to a maximum of 1,300m vertical depth. • The data spacing and distribution is sufficient to establish geological and grade continuity, and to support the Mineral Resource classification.
Orientation of data in relation to geological structure	• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	• Drilling is conducted in a predominantly regular grid to allow unbiased interpretation and targeting. • Scissor drilling, as well as some vertical and oblique drilling, has been used in key mineralised zones to achieve unbiased sampling of interpreted structures and mineralised zones, and in particular to assist in constraining the geometry of the mineralised hydrothermal tourmaline-sulphide breccia domains.
Sample security	• <i>The measures taken to ensure sample security.</i>	• Samples are delivered from the drill rig to the core shed twice daily and are never left unattended at the rig. • Samples are dispatched from site in locked boxes transported on XAM company vehicles to ALS lab in Ulaanbaatar. • Sample shipment receipt is signed off at the Laboratory with additional email confirmation of receipt. • Samples are then stored at the lab and returned to a locked storage site.
Audits or reviews	• <i>The results of any audits or reviews of sampling techniques and data.</i>	• Internal audits of sampling techniques and data management are undertaken on a regular basis, to ensure industry best practice is employed at all times. • External reviews and audits have been conducted by the following groups:

Criteria	JORC Code explanation	Commentary
		• 2012: AMC Consultants Pty Ltd. was engaged to conduct an Independent Technical Report which reviewed drilling and sampling procedures. It was concluded that sampling and data record was to an appropriate standard. • 2013: Mining Associates Ltd. was engaged to conduct an Independent Technical Report to review drilling, sampling techniques and QAQC. Methods were found to conform to international best practice. • 2018: CSA Global reviewed the entire drilling, logging, sampling, sample shipping and laboratory processes during the competent persons site visit for the 2018 MRe and found the systems and adherence to protocols to be to an appropriate standard.

JORC TABLE 1 - SECTION 2 - REPORTING OF EXPLORATION RESULTS

(Criteria in this section apply to all succeeding sections).

Criteria	Commentary
Mineral tenement and land tenure status	• The Project comprises 2 Mining Licences (MV-17129A Oyut Ulaan and (MV-17387A Kharmagtai): ○ Xanadu now owns 90% of Vantage LLC, the 100% owner of the Oyut Ulaan mining licence. ○ The Kharmagtai mining license MV-17387A is 100% owned by Oyut Ulaan LLC. Xanadu has an 85% interest in Mongol Metals LLC, which has 90% interest in Oyut Ulaan LLC. The remaining 10% in Oyut Ulaan LLC is owned by Quincunx (BVI) Ltd ("Quincunx"). • The Mongolian Minerals Law (2006) and Mongolian Land Law (2002) govern exploration, mining, and land use rights for the project.
Exploration done by other parties	• Previous exploration at Kharmagtai was conducted by Quincunx Ltd, Ivanhoe Mines Ltd and Turquoise Hill Resources Ltd including extensive drilling, surface geochemistry, geophysics, mapping. • Previous exploration at Red Mountain (Oyut Ulaan) was conducted by Ivanhoe Mines.
Geology	• The mineralisation is characterised as porphyry copper-gold type. • Porphyry copper-gold deposits are formed from magmatic hydrothermal fluids typically associated with felsic intrusive stocks that have deposited metals as sulphides both within the intrusive and the intruded host rocks. Quartz stockwork veining is typically associated with sulphides occurring both within the quartz veinlets and disseminated throughout the wall rock. Porphyry deposits are typically large tonnage deposits ranging from low to high grade and are generally mined by large scale open pit or underground bulk mining methods. The deposits at Kharmagtai are atypical in that they are associated with intermediate intrusions

Criteria	Commentary
	of diorite to quartz diorite composition; however, the deposits are in terms of contained gold significant, and similar gold-rich porphyry deposits.
Drill hole Information	• Diamond drill holes are the principal source of geological and grade data for the Project. • See figures in this ASX/TSX Announcement.
Data Aggregation methods	• The CSAMT data was converted into 2D line data using the Zonge CSAMT processing software and then converted into 3D space using a UBC inversion process. Inversion fit was acceptable, and error was generally low. • A nominal cut-off of 0.1% eCu is used in copper dominant systems for identification of potentially significant intercepts for reporting purposes. Higher grade cut-offs are 0.3%, 0.6% and 1% eCu. • A nominal cut-off of 0.1g/t eAu is used in gold dominant systems like Golden Eagle for identification of potentially significant intercepts for reporting purposes. Higher grade cut-offs are 0.3g/t, 0.6g/t and 1g/t eAu. • Maximum contiguous dilution within each intercept is 9m for 0.1%, 0.3%, 0.6% and 1% eCu. • Most of the reported intercepts are shown in sufficient detail, including maxima and subintervals, to allow the reader to make an assessment of the balance of high and low grades in the intercept. • Informing samples have been composited to two metre lengths honouring the geological domains and adjusted where necessary to ensure that no residual sample lengths have been excluded (best fit). The copper equivalent (eCu) calculation represents the total metal value for each metal, multiplied by the conversion factor, summed, and expressed in equivalent copper percentage with a metallurgical recovery factor applied. The copper equivalent calculation used is based off the eCu calculation defined by CSA in the 2018 Mineral Resource Upgrade. Copper equivalent (CuEq or eCu) grade values were calculated using the following formula: $\text{eCu or CuEq} = \text{Cu} + \text{Au} * 0.62097 * 0.8235,$ Gold Equivalent (eAu) grade values were calculated using the following formula: $\text{eAu} = \text{Au} + \text{Cu} / 0.62097 * 0.8235.$ Where: Cu - copper grade (%) Au - gold grade (g/t) 0.62097 - conversion factor (gold to copper) 0.8235 - relative recovery of gold to copper (82.35%)

Criteria	Commentary
	The copper equivalent formula was based on the following parameters (prices are in USD): ○ Copper price - 3.1 \$/lb (or 6834 \$/t) ○ Gold price - 1320 \$/oz ○ Copper recovery - 85% ○ Gold recovery - 70% ○ Relative recovery of gold to copper = 70% / 85% = 82.35%.
Relationship between mineralisation on widths and intercept lengths	• Mineralised structures are variable in orientation, and therefore drill orientations have been adjusted from place to place in order to allow intersection angles as close as possible to true widths. • Exploration results have been reported as an interval with 'from' and 'to' stated in tables of significant economic intercepts. Tables clearly indicate that true widths will generally be narrower than those reported.
Diagrams	• See figures in the body of the report.
Balanced reporting	• Resources have been reported at a range of cut-off grades, above a minimum suitable for open pit mining, and above a minimum suitable for underground mining.
Other substantive exploration data	• Extensive work in this area has been done and is reported separately.
Further Work	• The mineralisation is open at depth and along strike. • Current estimates are restricted to those expected to be reasonable for open pit mining. Limited drilling below this depth (-300m RLI) shows widths and grades potentially suitable for underground extraction. • Exploration on going.

JORC TABLE 1 - SECTION 3 - ESTIMATION AND REPORTING OF MINERAL RESOURCES

Mineral Resources are not reported so this is not applicable to this announcement. Please refer to ASX Announcement dated 31 October 2018 for Xanadu's most recent reported Mineral Resource Estimate and applicable Table 1, Section 3.

JORC TABLE 1 - SECTION 4 - ESTIMATION AND REPORTING OF ORE RESERVES

Ore Reserves are not reported so this is not applicable to this announcement.