

23rd March 2017

ASX CODE

AUC

DIRECTORS & MANAGEMENT

Mr Richard Lockwood
Non-Executive Chairman

Mr Denis Rakich
*Executive Director &
Company Secretary*

Mr Neil Fearis
*Independent
Non-Executive Director*

Mr Geoff Jones
Non-Executive Director

Miss Melanie Sutterby
Geology Manager

Ms Elsie Lee
Financial Controller

REGISTERED OFFICE

Level 16, AMP Building
140 St Georges Terrace
Perth WA 6000

SHARE REGISTRY

Security Transfer Registrars
770 Canning Highway
Applecross WA 6153

ISSUED CAPITAL (23.03.17)

Ordinary shares: 350.3m
Unlisted options: 38.5m

INVESTOR RELATIONS

Denis Rakich
T: +61 (0)8 9220 9890
M: +61 (0)409 209 882
E: drakich@ausgoldlimited.com

DRILLING AT DATATINE CONTINUES TO DEMONSTRATE EXTENSIONS OF MINERALISATION

- Assay results from drilling at Datatine demonstrate continuity of gold mineralisation, with significant intercepts of:
 - 4m @ 3.47 g/t Au (from 102m) in BSRC0748, including
 - 1m @ 11.05 g/t Au (from 105m)
 - 2m @ 1.41 g/t Au (from 12m) in BSAC0743
 - 4m @ 1.73 g/t Au (from 17m) in BSAC0743
- Drilling results confirm mineralisation is open along strike and down dip
- Reverse circulation (RC) and aircore (AC) drilling at Datatine continue to test mineralisation at depth and along strike with further results expected in coming weeks

Ausgold Limited (ASX: AUC) ("Ausgold" or "the Company") is pleased to announce new assay results for the RC and AC drilling program being conducted on the Datatine prospect (Datatine) at the Company's 100%-owned Katanning Gold Project (KGP). These results demonstrate continuity of gold mineralisation over a strike length of ~600m, which remains open along strike and down dip. The new results support the geological model for high-grade gold mineralisation at Datatine.

A ~3500m RC drilling program is planned at the Datatine prospect testing extensions of mineralisation. To date, 22 RC holes for 2406m have been completed; results have been returned for 12 RC holes in total. Further RC assay results are expected next week. In conjunction with the RC program, AC drilling has been testing the strike extent of Datatine and the geochemical and geophysical targets around the Datatine area. To date, 140 AC holes for 3647m have been drilled. AC assay results are expected in the coming weeks.

Datatine is located 7km north of the Jinkas open pit at the KGP (Table 1, Appendix 1). Datatine represents a strike continuation of the Jinkas-Dingo trend, with structures and mafic gneiss gold-hosting which are similar to those observed in the Jinkas mine area. The Datatine area is defined by an east-west striking gold and geochemical anomaly and coincident magnetic geophysical signature which extends over 600m. Drilling at Datatine has identified gold mineralisation along 100m of strike length and to a depth of 200m. However, the mineralisation remains open at depth and along strike. Gold mineralisation dips towards the south west. A wider gold-AC anomaly remains open to approximately 400m along strike.

Ausgold's Geology Manager, Miss Melanie Sutterby, commented:

"The results from the follow-up RC drilling at Datatine continue to demonstrate the mineralisation is still open in all directions."

RC drilling is ongoing to determine the geometry and extent of the mineralisation. We are confident that the results of the recent drilling strengthen Datatine's potential to add a significant quantity of ounces to our global resource base".

Datatine RC Program

The RC drill program at Datatine intercepted high-grade gold mineralisation in fresh rock supporting the mineralisation intercepted in earlier AC drill programs (refer ASX announcement 5 May 2016 and 13 December 2016). Results from the maiden RC drilling at Datatine include 25m @ 2.47 g/t Au (from 20m) and 17m @ 1.67 g/t Au (from 55m).

A ~3500m follow-up RC program is currently underway at Datatine with the drilling designed to test the continuity of mineralisation along strike and at depth. At present, the geometry of the orebody has not been definitively determined. However, drilling to date has tested only tested 100m along strike and to a depth of 200m. The northern gold-in-soil and coincident geophysical anomaly extends for approximately 600m. The currently defined gold mineralisation strikes in an east-west orientation and dips towards the southwest.

Assay results have been received for 12 of the 22 RC holes drilled to date (refer Table 1).

Hole ID	Northing MGA 50	Easting MGA 50	AHD RL	Magnetic Azimuth	Dip	Total Depth (m)	From (m)	To (m)	Interval (m)	Au (g/t)					
BSRC0723*	6295102	581205	301	334°	-61°	60	16	25	9	1.74					
		Including					20	23	3	4.16					
BSRC0724*	6295089	581211	301	334°	-60°	20	11	19	8	3.87					
		Including					11	13	2	10.46					
		Including					14	16	2	4.23					
BSRC0725*	6295081	581215	301	334°	-60°	24	1	3	3	1.39					
							18	24	6	1.28					
		Including					18	20	2	2.24					
BSRC0726*	6295087	581220	301	330°	-60°	78	20	45	25	2.47					
		Including					42	44	2	16.26					
BSRC0727*	6295066	581235	301	332°	-60°	102	34	45	11	2.26					
		Including					39	41	2	10					
							55	72	17	1.67					
		Including					57	62	5	3.11					
		Including				68	70	2	3.34						
BSRC0731*	6295048	581243	301	333°	-60°	126	55	63	8	1.92					
							68	79	11	0.8					
BSRC0737^	6295146	581239	302	334°	-60°	42	No Significant Results								
BSRC0738^	6295128	581248	302	334°	-60°	60	No Significant Results								
BSRC0739^	6295110	581256	302	334°	-90°	126	No Significant Results								
BSRC0740^	6295111	581256	303	334°	-60°	90	No Significant Results								
BSRC0741^	6295030	581298	302	334°	-60°	130	77	84	7	0.97					
		Including					77	79	2	1.54					
		Including					82	84	2	1.5					
BSRC0742^	6295031	581253	301	333°	-60°	144	73	85	12	2.01					
		Including					80	83	3	4.3					
							92	96	4	1.56					
BSRC0743	581181	695085	300	334°	-60°	102	12	14	2	1.41					
							17	21	4	1.73					
							27	28	1	0.52					
BSRC0744	581190	6295065	300	334°	-60°	88	26	27	1	0.54					
							31	32	1	0.90					
							38	39	1	0.35					
							54	56	2	0.38					
BSRC0745	581198	6295049	302	334°	-60°	102	26	35	9	0.52					
							42	44	2	1.42					
							54	55	1	1.07					
							64	67	3	0.29					
BSRC0746	581170	6295103	302	334°	-60°	62	No Significant Results								
BSRC0747	581257	6295017	301	334°	-90°	176	147	153	6	0.57					
							167	169	2	0.74					
BSRC0748	581297	6295030	302	334°	-60°	174	98	99	1	0.47					
							102	106	4	3.47					
							Including					105	106	1	11.05
							117	125	8	0.96					
							139	140	1	1.13					

Table 1. Drill hole information and gold assay results from first pass RC drilling at the Datatine prospect, KGP.

*Results released ASX Announcement 13 December 2016 & 17 January 2017

^Results released ASX Announcement 13 December 2016 & 17 January 2017

Notes to Table 1.

For RC assay results the intervals reported are thickness weighted averages (ie. XXm grading XX grams per tonne gold content). Reported intervals are calculated using $\geq 0.3\text{g/t Au}$ cut-off grade and using a $\leq 2\text{m}$ minimum internal dilution (unless otherwise stated).

BSRC0742 was drilled to determine the continuity of mineralisation at depth (refer Figure 1). Encouraging results indicate that a broad zone of mineralisation extends at least 100m down dip.

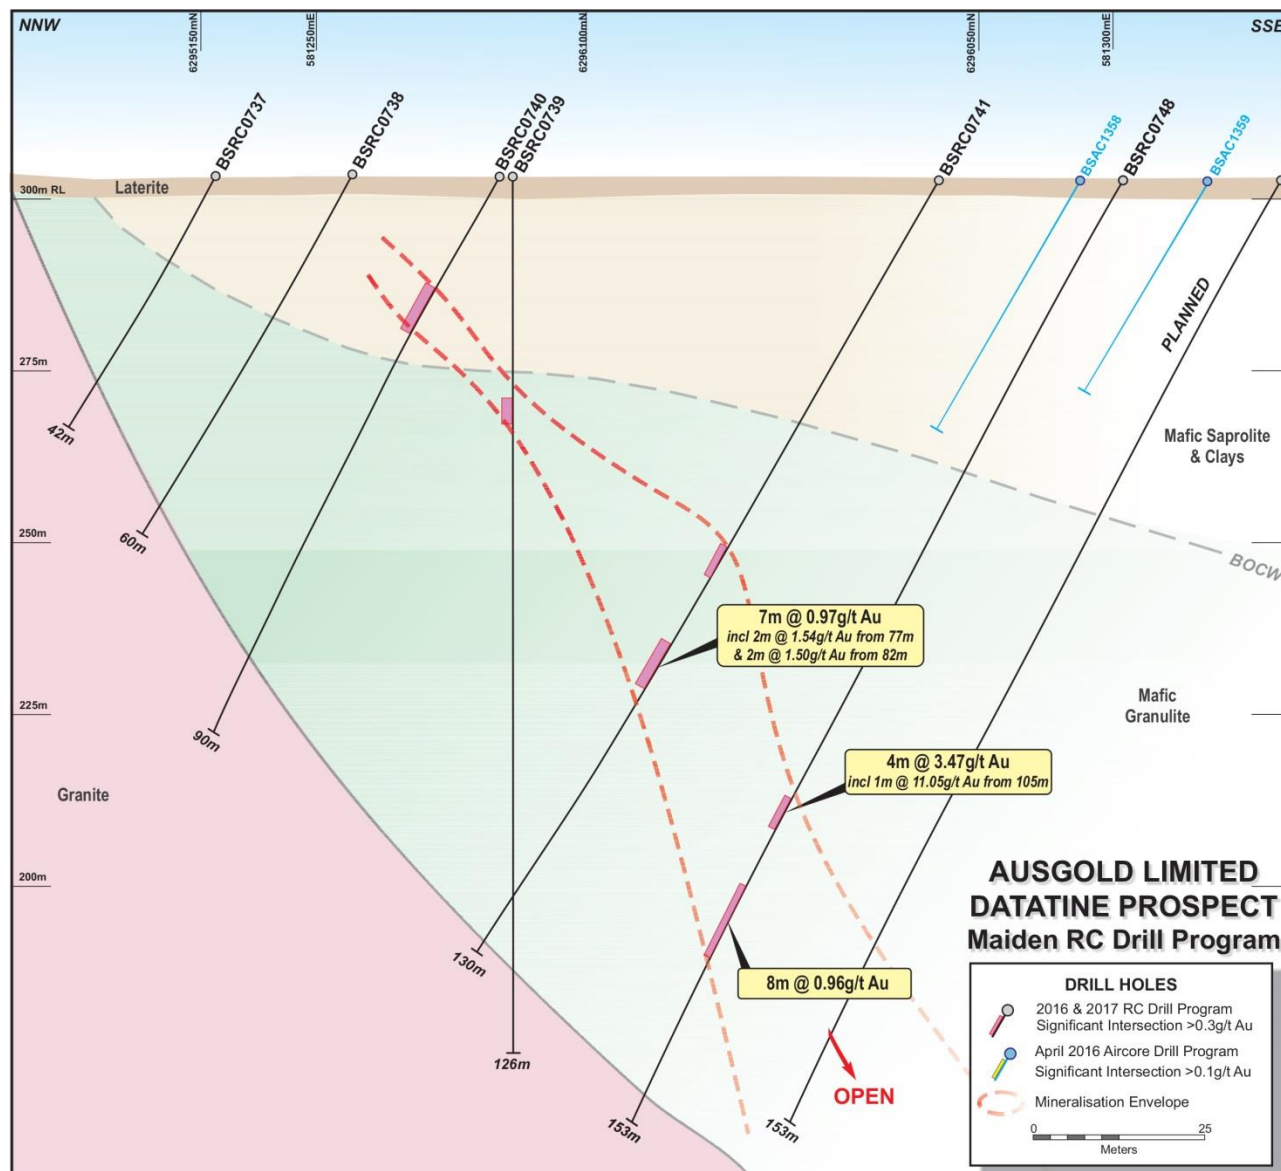


Figure 1. Datatine prospect cross-section showing drill holes, interpreted geology and mineralisation – see Figure 4 for location.

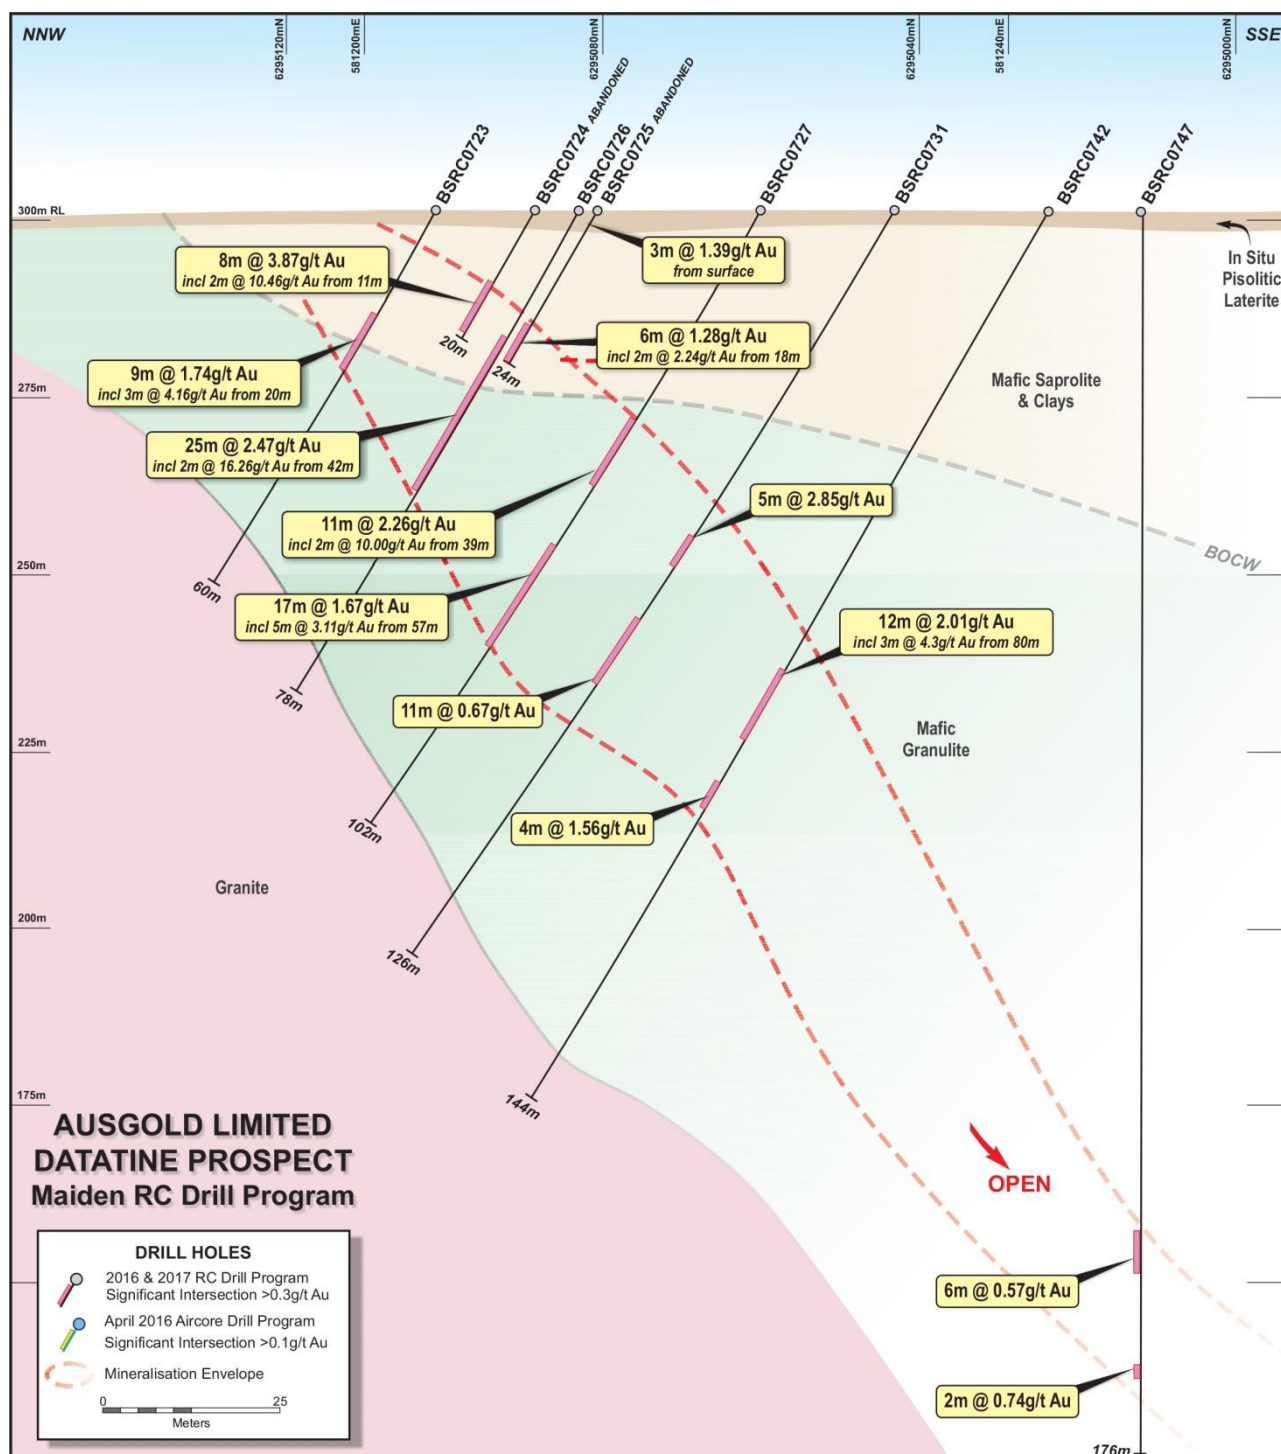


Figure 2. Datatine prospect cross-section showing drill holes, interpreted geology and mineralisation – see Figure 4 for location.

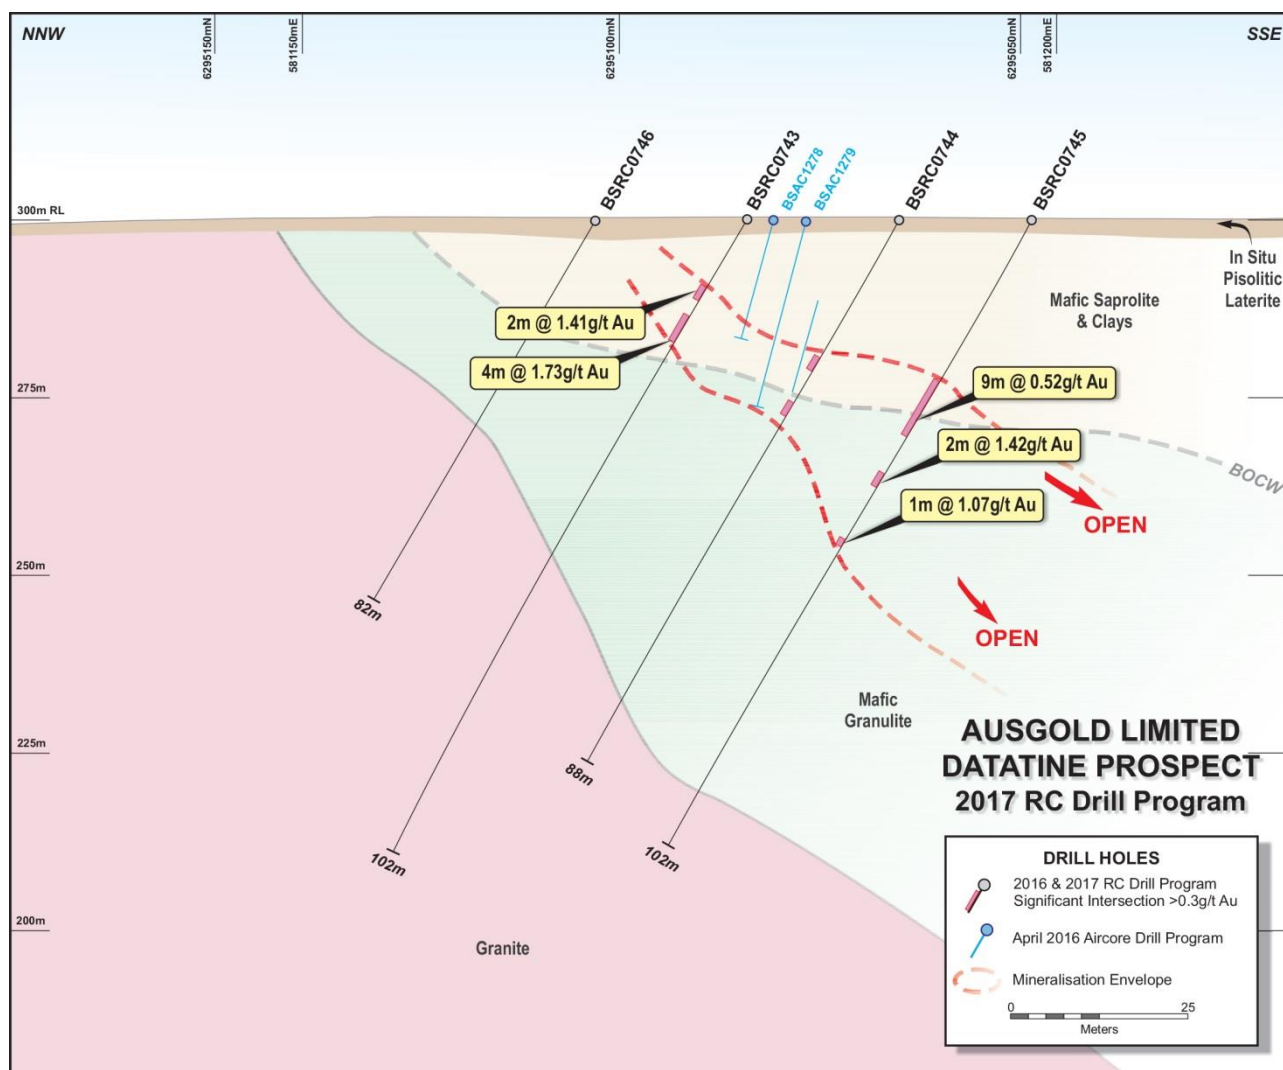


Figure 3. Datatine prospect cross-section showing drill holes, interpreted geology and mineralisation – see Figure 4 for location.

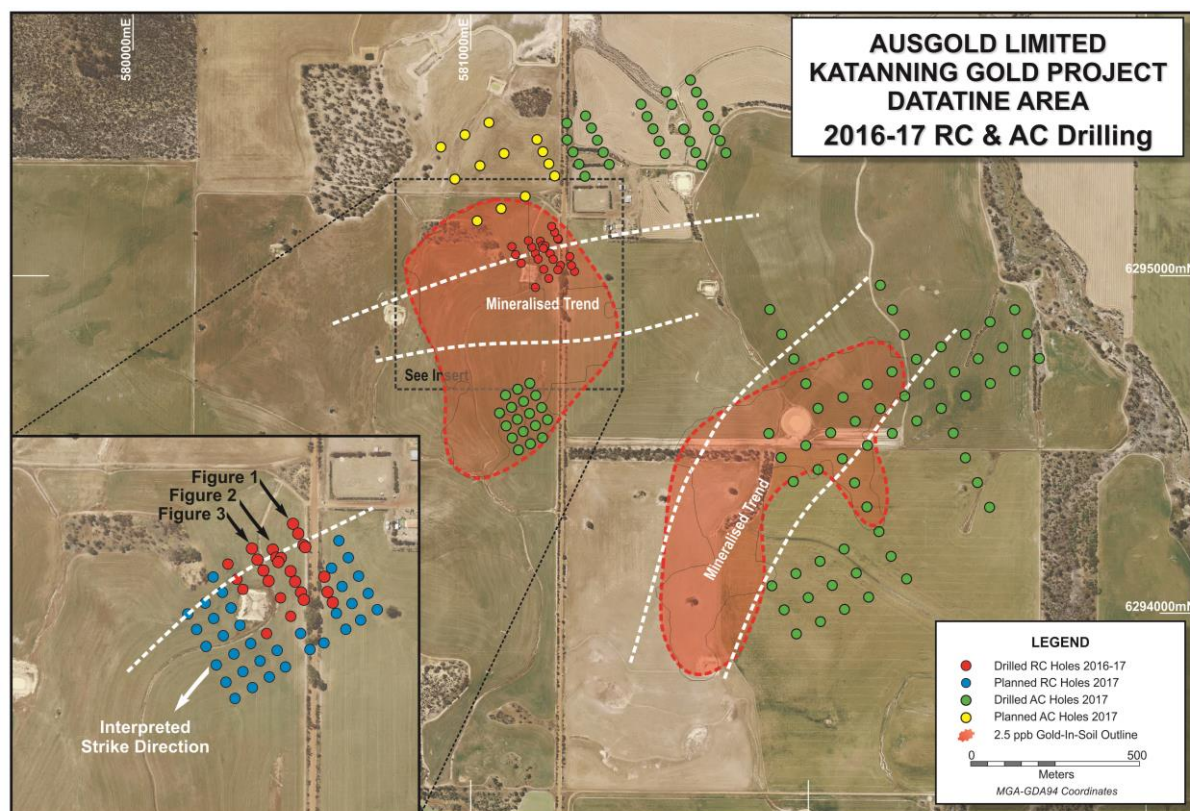


Figure 4. Datatine prospect regional plan showing RC and AC drill holes, interpreted mineralisation

Forward Drilling Program

This drilling program so far has consisted of 22 RC holes for a total of 2406m and 140 AC holes for a total of 3647m. Approximately 3500m of RC and 8000m of AC are planned in the current program, which is expected to be completed during Quarter 2 2017 subject to the availability of funding. RC drilling is currently ongoing at Datatine, with further AC drilling planned.

Overview of the Katanning Gold Project

The KGP covers ~2,400km² and is located 275 kilometres southeast of Perth and approximately 40km northeast from the wheatbelt town of Katanning. Ausgold holds a dominant ground position in this relatively under-explored greenstone belt (Figure 5), an area prospective for Archean gold deposits.

During a hiatus in exploration activity at the KGP between 2013 and 2015, a thorough re-interpretation of data, conducted in conjunction with SRK Consulting using the data available including open pit exposures, diamond core, drill logs, geophysical and geochemical datasets revealed the presence of pipe-like high-grade gold mineralised shoots.

The Datatine prospect is a high priority target that is supported by advances in the understanding of Katanning area. Datatine has gold and multi-element geochemical anomalies with a coincident magnetic geophysical signature that indicates potential gold-hosting structures.

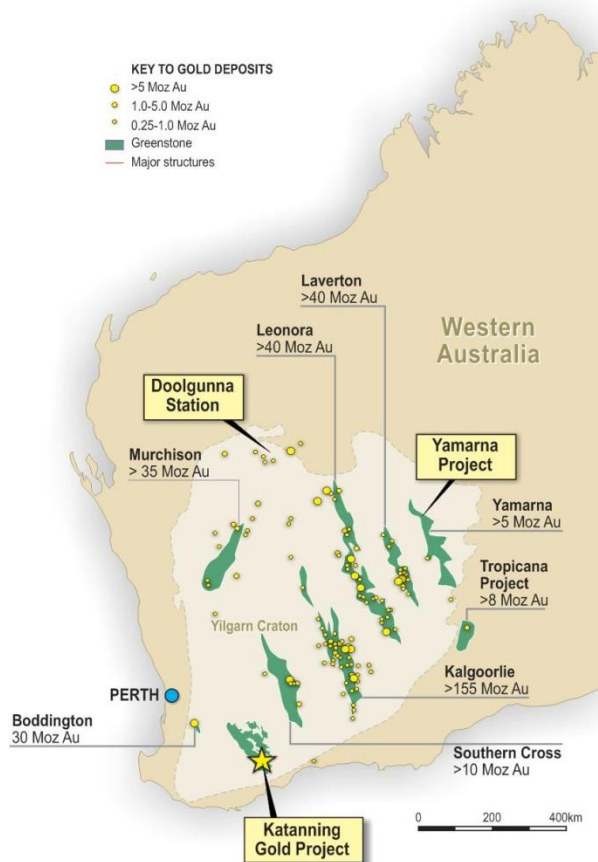


Figure 5. Regional location map showing the KGP, other Ausgold projects and mineralised greenstone belts

CONTACT DETAILS

For further information, please contact
Mr Denis Rakich on
T: +61 (0)8 9220 9890 M: +61 (0)409 209 882
W: www.ausgoldlimited.com

Forward-Looking Statements

This announcement includes “forward-looking statements” as that term within the meaning of securities laws of applicable jurisdictions. Forward-looking statements involve known and unknown risks, uncertainties and other factors that are in some cases beyond Ausgold Limited’s control. These forward-looking statements include, but are not limited to, all statements other than statements of historical facts contained in this presentation, including, without limitation, those regarding Ausgold Limited’s future expectations. Readers can identify forward-looking statements by terminology such as “aim,” “anticipate,” “assume,” “believe,” “continue,” “could,” “estimate,” “expect,” “forecast,” “intend,” “may,” “plan,” “potential,” “predict,” “project,” “risk,” “should,” “will” or “would” and other similar expressions. Risks, uncertainties and other factors may cause Ausgold Limited’s actual results, performance, production or achievements to differ materially from those expressed or implied by the forward-looking statements (and from past results, performance or achievements). These factors include, but are not limited to, the failure to complete and commission the mine facilities, processing plant and related infrastructure in the time frame and within estimated costs currently planned; variations in global demand and price for coal and base metal materials; fluctuations in exchange rates between the U.S. dollar, and the Australian dollar; the failure of Ausgold Limited’s suppliers, service providers and partners to fulfil their obligations under construction, supply and other agreements; unforeseen geological, physical or meteorological conditions, natural disasters or cyclones; changes in the regulatory environment, industrial disputes, labour shortages, political and other factors; the inability to obtain additional financing, if required, on commercially suitable terms; and global and regional economic conditions. Readers are cautioned not to place undue reliance on forward-looking statements. The information concerning possible production in this announcement is not intended to be a forecast. They are internally generated goals set by the board of directors of Ausgold Limited. The ability of the Company to achieve any targets will be largely determined by the company’s ability to secure adequate funding, implement mining plans, resolve logistical issues associated with mining and enter into any necessary off take arrangements with reputable third parties. Although Ausgold Limited believes that its expectations reflected in these forward-looking statements are reasonable, such statements involve risks and uncertainties and no assurance can be given that actual results will be consistent with these forward-looking statements.

Competent Person’s Statements

The information in this announcement that relates to Exploration Targets and Exploration Results is based on information compiled by Miss Melanie Sutterby who is a member of the Australasian Institute of Mining and Metallurgy (AusIMM) and has sufficient experience relevant to the style of mineralisation under consideration and to the activity which she undertakes to qualify as a Competent Person as defined in the 2012 edition of the “Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves”. Miss Sutterby is an employee of Ausgold Limited and consents to the inclusion in this report of the matters based on the information in the form and context in which it appears. Miss Sutterby takes responsibility for the integrity of the Exploration Results including sampling, assaying, and QA/QC, and the preparation of the geological interpretations. The Competent Persons consent to the inclusion of such information in this announcement in the form and context in which it appears.

Appendix 1 – Table 2.

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1m samples from which 3kg was pulverised to produce a 30g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	This Reverse Circulation (“RC”) drilling program consisted of 6 reverse circulation holes for 592m. Samples from RC drilling were collected in one metre intervals in mineralised zones with a 1/8 split for assay, split by a cyclone-mounted cone splitter, bagged in pre-numbered calico bags and the remainder retained in large plastic bags. QAQC samples consisting of field duplicates (additional split from RC), with standards and blanks inserted into the sequence of assay samples at a rate of 1 in 10. Each RC metre sampled weighed approximately 2 to 3 kilograms. All RC samples were sent to ALS Laboratories for crushing and pulverising to produce a 50 gram sample charge for analysis by fire assay and flame atomic absorption spectrometry (AAS).
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	All samples in this program were from RC drilling conducted by Red Rock Drilling Pty Ltd. The RC drill holes utilised a down hole hammer and face sampling bit and were 5.5 inches in diameter.

Criteria	JORC Code explanation	Commentary
<i>Drill sample recovery</i>	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	RC drilling sample weights (inclusive of moisture) are recorded for bulk reject samples. Recoveries are calculated qualitatively. In general, sample recovery observed was high (+95%). The cyclone-mounted cone splitter was cleaned on a regular basis to eliminate/minimise down hole and/or cross-hole contamination. Samples recovered were almost all dry, with occasional moist samples. The relationship between sample recovery and grade and whether bias has been introduced has not been investigated at this stage.
<i>Logging</i>	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	All drill holes in the current program have been geologically logged to a level of detail to support the definition of geological domains appropriate to support Mineral Resource estimation and classification. Representative rock chips were collected in chip trays, and logged by the geologist at the drill site. Sample condition and degree of weathering were recorded qualitatively. No geotechnical logging is possible on reverse circulation samples. Lithology, weathering (oxidation state), structure, veining, mineralisation and alteration are recorded in detail using an arQuire logging interface with defined look up tables to ensure that all data is collected consistently. This data is logged using tablet computers. All data is validated by the logging geologist before being entered in an acQuire database. All drill holes are logged.
<i>Sub-sampling techniques and sample preparation</i>	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	RC chip samples were collected from each sampling interval from the rig mounted cyclone. This sample was riffle split to produce a sample that represents 12.5% of the initial sample collected. Another 25% sample is retained as a reference sample and when required (1 in 30) another 12.5% sample was collected as a field duplicate. Upon receipt by the laboratory the samples were sorted and dried at 160°C before being pulverised to nominally 80% passing 75 microns. Samples weighing more than three kilograms were halved by riffle splitting prior to pulverising with smaller samples completely pulverised. For QAQC samples, a sequence of matrix matched certified reference materials, commercial certified reference materials and blanks were inserted into the sample run at a frequency of approximately one in 14 samples. Sample sizes are considered to be appropriate for the style/texture of oxide and sulphide mineralisation at the Katanning Gold Project.

Criteria	JORC Code explanation	Commentary
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	
<i>Quality of assay data and laboratory tests</i>	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	The analytical techniques used are considered appropriate using four acid digestion or sample fusion. Gold was analysed by ALS at Perth (Australia) using the Au-AA26 fire assay with Atomic Absorption Spectroscopy (AAS) method with a 50g sample charge. This method has a lower detection limit of 0.01g/t and upper detection limit of 100g/t. When gold is greater than 100g/t the Au-DIL (gold by dilution) method is used (lower detection of 1g/t). Certified field duplicates, blanks and standards were inserted approximately every 10m. Blank samples are inserted to check for contamination in field sampling, laboratory sample preparation and analysis. The blank material used should be below detection limits. The gold standards were sourced from Geostats Pty Ltd and OREAS with gold certified values ranging between 0.38g/t and 7.07g/t. Standard reference materials are used to check accuracy and bias of the analytical method. The results were similar to the standard concentration for the specific standard. QAQC samples were monitored on a batch-by-batch basis. An assay batch is accepted if the blank samples are within the acceptable limits (5 times the lower detection limit) and the standards are within the + 3SD (standard deviations). One failed standard can cause rejection if the results around the failed standard are not in the normal grade range. A batch is also re-assayed when assay results from two or more standards are outside the acceptable limits. The inserted blank materials did not show any consistent issues with sample contamination. 100% of the gold standards assays were within acceptable limits with no low or high bias. The performance of field duplicates in RC samples is generally reasonable and the variations are related to the style of mineralisation. ALS also insert QAQC samples to internally test the quality of the analysis. These results are received with the assay results in each batch. The ALS QAQC included standards, blanks and duplicates for independent quality control. The results of the lab standards were also monitored on a batch to batch basis by the data geologist. The results did not show any issues with the laboratory.
<i>Verification of sampling and assaying</i>	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry</i>	High standard QAQC procedures are in place (and will be audited), therefore repeatability issues from a QAQC point of view are not considered to be significant. Significant and/or unexpected intersections were reviewed by alternate company personnel through review of geological logging data, physical examination of remaining samples and review of digital

Criteria	JORC Code explanation	Commentary
	<i>procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	geological interpretations. All assay data was accepted into the database as supplied by the laboratory. Data importation into the database is documented through standard operating procedures and is guided by acQuire import validations to prevent incorrect data capture/importation. Geological, structural and density determination data is directly captured in the database through a validation controlled interface using Toughbook computers and acquire database import validations. Primary data is stored in its source electronic form. Assay data is retained in both the original certificate (.pdf) form and the text files received from the laboratory. Data entry, validation and storage are discussed in the section on database integrity below.
<i>Location of data points</i>	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	Drill hole collars (and drilling foresight/back-sight pegs) were set out and picked up Ausgold personnel using a differential GPS; which provided +/-0.8 meter accuracy The grid system is MGA94 datum, UTM zone 50. Elevation values were in AHD. An end of hole gyroscopic drill hole survey was completed by the drilling contractors using a Reflex tool. The gyro measured the first shot at 0m followed by every 10m down-hole. The data was examined and validated onsite by the supervising geologist. Any surveys that were spurious were re-taken. Validated surveys are entered into the acQuire data base by data entry personnel.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	Sampling was conducted via AC on a nominal top-to-tail, 40m or 80m hole spacing and a line spacing of 100m, 200m or 400m. AC results reported are based on 4m composite samples for gold unless otherwise stated. No compositing was applied to RC results. RC holes are spaced approximately 20m along the cross section where AC holes (on the same section) were spaced in a "top-to-tail" manner. Current RC drilling covers one cross-section and at this stage, is only considered as first pass exploration and not sufficient for Mineral Resource estimation.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key</i>	Angled AC and RC drilling (-60 towards 335 north) tested the interpreted north dipping stratigraphy perpendicular (based from field mapping and magnetic inversion modelling) minimising lithological bias. At this stage any primary mineralised structural orientation is unknown and no comment can be made The angled orientation of AC drilling may introduce sampling bias due to the unknown orientation of primary mineralisation/structures. This would be considered minimal as drilling coverage is essentially

Criteria	JORC Code explanation	Commentary
	<i>mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	restricted to the overlying regolith and seldom penetrates fresh rock by more than a couple of metres.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	Calico bags were placed into numbered polyweave bags which were tied securely and marked with flagging. Rejects portions were routinely weighed during relocation to a designated location for temporary storage. Assay samples were stored at a dispatch area and dispatched, depending on the frequency of pickups and length of the program. Samples were shipped via Katanning Logistics directly to ALS in Perth. The sample dispatches were accompanied by supporting documentation signed by the geologist and showing the sample submission number, analysis suite and number of samples. The chain of custody is maintained by ALS once the samples are received on site and a full audit trail for every sample is available through the ALS' Webtrieve application. Assay results are emailed to the responsible geology administrators in Perth and will be loaded into the acQuire database through an automated process. QAQC on import is completed before the results are finalised.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	Before the commencement of the current RC program, the sampling process was fully reviewed and documented as a standard company process. A number of operational and technical adjustments were identified to improve validation of collected data, interpretation of data and management of QAQC practices. These improvements have been updated into standard operating procedures.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	Reported results are all from 100% owned Ausgold Exploration Pty Ltd Tenements (wholly owned subsidiary of Ausgold Limited), including E70/2928. Apart from reserved areas, rights to surface land use are held under freehold titles. Ausgold has entered into access and compensation agreements with freehold landowners that permit exploration activities. Bordering the eastern wall of the Jinkas open pit, there is a registered Aboriginal Heritage Site 5353 known as “Jinkas Hill”. No access for exploration or mining activities is allowed within this site unless a section 18 application to move/destroy an Aboriginal Heritage Site is submitted to the Department of Indigenous Affairs. The land is used primarily for grazing and cropping. The tenement is in good standing, and all work is conducted under specific approvals from the Department of Mines and Petroleum (“DMP”).
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Gold mineralisation was discovered by Otter Exploration NL in 1979 at Jinkas Hill, Dyliabing, Lone Tree and White Dam after following up stream sediment anomalies. Between 1984 and 1988 Otter and related companies evaluated the region with several other explorers including South West Gold Mines and Minasco Resources Pty Ltd. In 1987 Glengarry Mining NL purchased the project and in 1990 entered into a joint venture with Uranerz who agreed on minimum payments over three years to earn 50% interest. Uranerz withdrew from the project in 1991 after a decision by their parent company in Germany to cease Australian operations. International Mineral Resources NL (“IMR”) purchased the mining leases and the Grants Patch treatment plant from Glengarry Mining NL in 1995 and commenced mining at the Jinkas deposit in December 1995. Ausgold understands the mine was closed in 1997 after producing approximately 20,000 oz of gold from the Jinkas and Dingo Hill open cuts at a head grade of approximately 2.4g/t. In addition, the mine closure was brought about by a combination of the low gold price of the time (<US\$400/oz) and the inability of the processing plant’s comminution circuit to process hard ore from below the base of weathering. Reports from the period indicate that the ore bodies were reasonably predictable in terms of grade and continuity and appeared to produce consistent and reproducible results from grade control (Ravensgate, 1999).

Criteria	JORC Code explanation	Commentary
		Great Southern Resources Pty Ltd (“GSR”) purchased the mining and exploration leases from IMR in August 2000. Ausgold entered into a joint venture with GSR in August 2010, and the mineral titles were transferred to Ausgold in entirety in August 2011.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The project includes two main deposit areas comprising Jinkas in the north, and Dingo in the south. The Jinkas area is further subdivided into a set of mineralised zones. The majority of the project area is overlain by residual clays with outcrop mostly limited to remnants of lateritic duricrust on topographic highs. Gold mineralisation is hosted by medium to coarse-grained mafic gneisses which dip at around 30° to 45° towards grid east (68°). These units represent Archaean greenstones metamorphosed to granulite facies. The mineralised gneissic units are interlayered with barren quartz-monzonite sills up to approximately 120 metres thick and are cross cut by several Proterozoic dolerite dykes that post-date mineralisation and granulite metamorphism. Gold predominantly occurs as free gold associated with disseminated pyrrhotite and magnetite, lesser pyrite and chalcopyrite and traces of molybdenite. Thin remnant quartz veins are associated with higher grade zones.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the</i>	Plans showing location of drill holes and also location of significant results and interpreted trends are provided in the figures of report. Any new significant RC results are provided in tables within the announcement.

Criteria	JORC Code explanation	Commentary
	<i>Competent Person should clearly explain why this is the case.</i>	
<i>Data aggregation methods</i>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	For RC assay results the intervals reported are thickness weighted averages (ie. XXm grading XX grams per tonne gold content). Reported intervals are calculated using $\geq 0.3\text{g/t Au}$ cut-off grade and using a $\leq 2\text{m}$ minimum Internal Dilution (unless otherwise stated). All reported AC assays have been arithmetically length weighted. A nominal 0.1g/t Au lower cut- off is reported as being potentially significant in the context of the grassroots geological setting. Internal waste intervals (i.e. $<0.1\text{ g/t}$) to not exceed the width of a 4m composited sample. Higher grade intervals within larger intersections are reported as included intervals and noted in results table. No top-cut off grades have been applied until more assay results become available to allow statistical determination.
<i>Relationship between mineralisation widths and intercept lengths</i>	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	The geometry of any primary mineralisation is not known at present due to the early stage of exploration. The angled orientation of AC drilling may introduce some sampling bias (increasing the intercept width of flat lying or vertical mineralisation). All intersections are subsequently presented as downhole lengths. If down hole length varies significantly from known true width then appropriate notes are provided.
<i>Diagrams</i>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	Refer to figures

Criteria	JORC Code explanation	Commentary
<i>Balanced reporting</i>	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Please see information provided in results tables in in this announcement
<i>Other substantive exploration data</i>	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	At this stage there is no substantive exploration data from the recent drilling that is meaningful and material to report i.e. at this early stage of reporting of drill hole results there is insufficient data to composite cross sections.
<i>Further work</i>	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Further work is discussed in the announcement in relation to the exploration results.