



1 June 2021

ZEMPLIN PROSPECT DRILLING RETURNS 1,220 G/T SILVER

- **Assay results from the first three holes of the four-hole drilling program include:**
 - **CZDD004: 4.3m @ 201.4 g/t Ag 0.1% Pb, from 92.5m**
including **0.5m @ 1,220.0 g/t Ag from 92.5m**
 - CZDD004: 4.4m @ 33.3 g/t Ag, from 49.6m
- Combined with previously reported:
 - CZDD001: 4.5m @ 163.6 g/t Ag 0.2% Pb, from 85.3m
including 2.3m @ 238.3 g/t Ag from 87.5m
including 0.8m @ 342.0 g/t Ag from 89m
 - CZDD003: 6.0m @ 128.3 g/t Ag 0.2% Pb from 94.0m
including 1.9m @ 305.5 g/t Ag from 97.1m
including 0.9m @ 488.0 g/t Ag from 98.1m
and 0.5m @ 202.0 g/t Ag 0.6% Pb, 1.3% Zn from 113.7m
- Samples from hole CZDD002 were dispatched for assay last week.
- Zemplin silver mineralisation consists of series a of parallel structures, the geometry of which is now better understood. Drill planning will ensure growth of the defined silver system at depth and along strike.
- Previous drilling:
 - VS19: 2.5m @ 514.2 g/t Ag, 0.02 g/t Au, 13.4% Pb, 8.3% Zn from 95.0m
 - VS20: 2.4m @ 182.1 g/t Ag, 0.76 g/t Au, 15.2% Pb, 16.5% Zn from 145.6m


The Directors of Prospect Limited ('Prospect' or 'the Company') (ASX: PRS) are pleased to announce initial results at the Zemplin prospect within the Cejkov-Zemplin Project within the Eastern Slovakian neovolcanic belt. Drilling four holes, CZDD001 to CZDD004, has now been completed for a total of 794.5 metres.



**Classic banded epithermal vein from an interval in CZDD004 that assayed 1,220 g/t Ag (92.5 to 93.0m).
Silver assays very similar to previous drilling with lower non material base metal intercepts**

The Zemplin prospect is part of the 29.23 Km², 100%-owned Cejkov-Zemplin Licence, located in eastern Slovakia. Zemplin is prospective for epithermal precious metals and base metals vein-style mineralisation.


In total, the new holes intersected over 40 epithermal veins, hosted within zones of hydrothermally altered rhyodacitic and andesitic volcanics. Silver in CZDD001 85.3m to 89.8m (4.5m) and CZDD003 97.1m to 99.0m (1.9m) occurs as visible Ag-sulphides in quartz veins near the rhyolite/andesite contact.

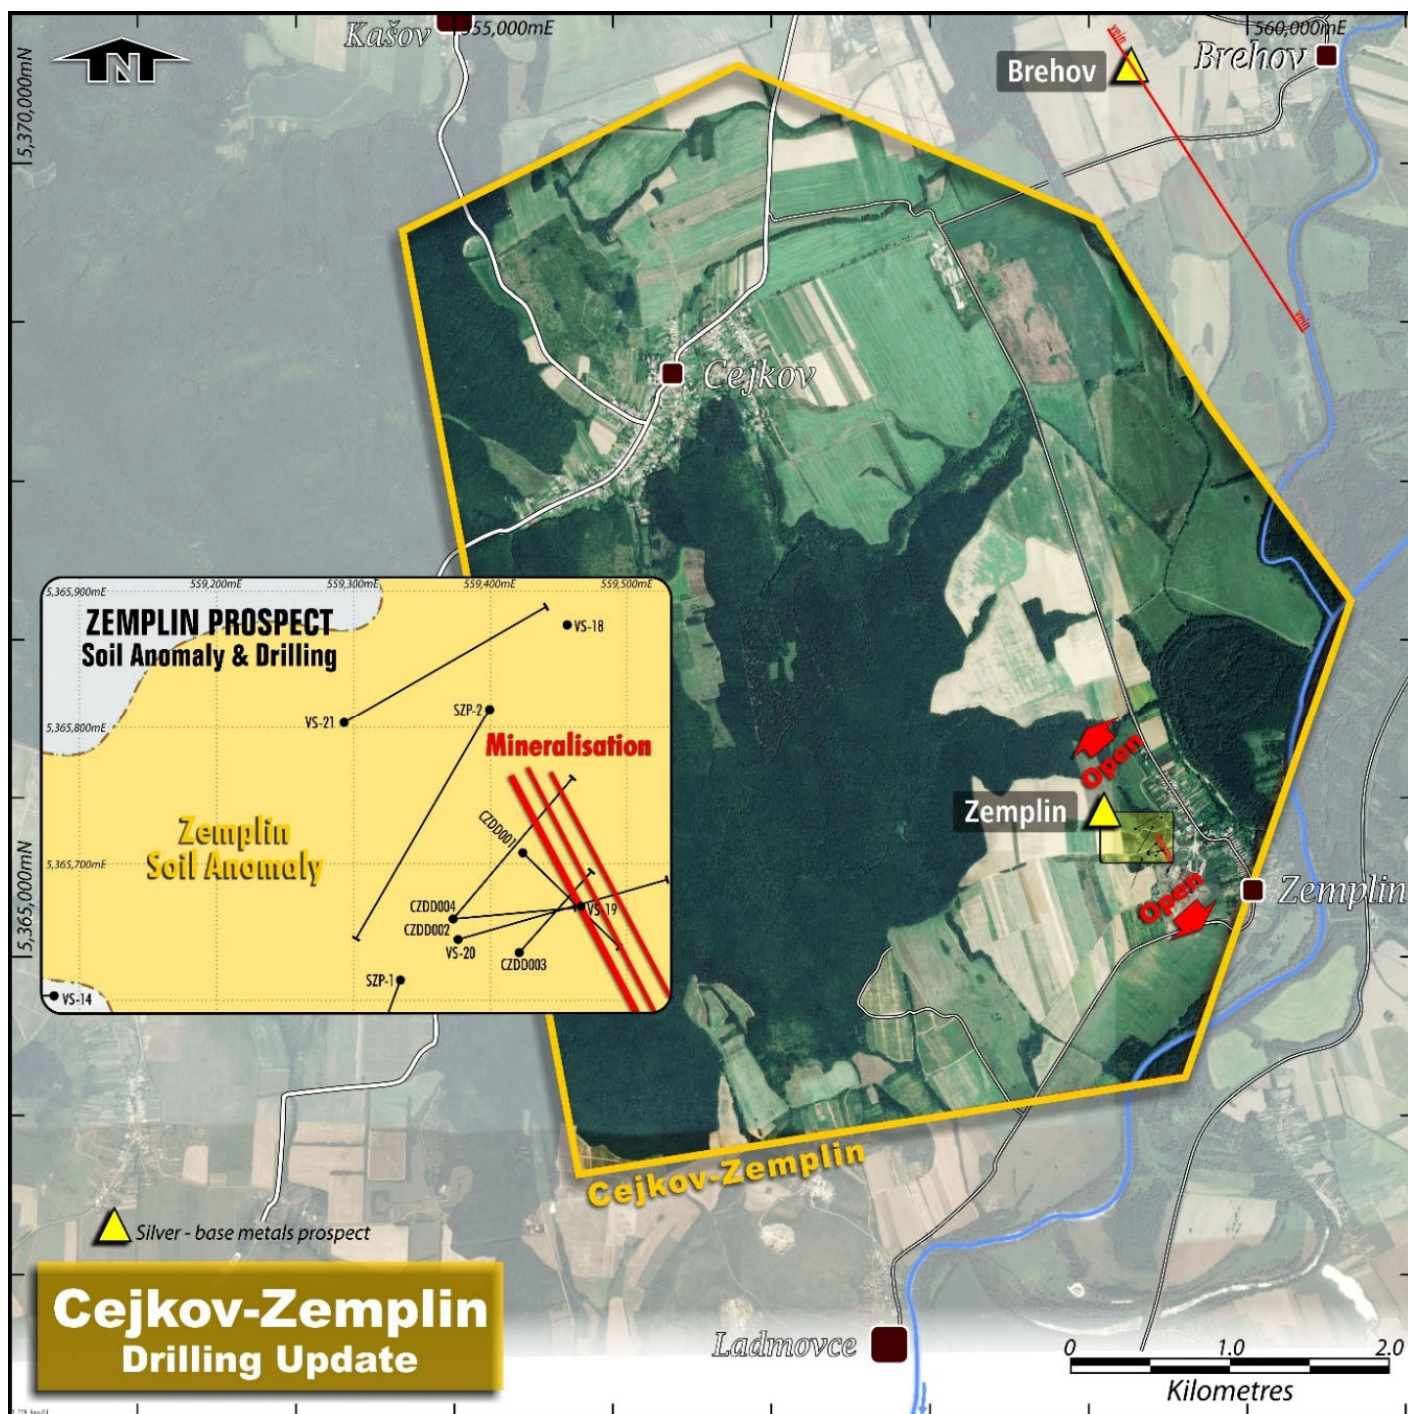


Zemplin structure consists of parallel zones which remains open to the northwest and southwest. Parallel structures across strike exist including 4km to the northeast to Brehov (2Mt @, 214 g/t Ag 4.4% Pb and 6.6% Zn).

Prospech is reviewing remote magnetic or drone magnetic contractors to further discern the trend of the main silver zone trending further West of North than previously interpreted by previous works, but importantly remains a continuously mineralised silver zone. Drilling is planned at depth and along strike.

There is potential for gold mineralisation at depth as seen for a neighbouring property at Brehov, but regardless grades averaging over 100 g/t silver are considered likely to constitute a competitive target within the Prospech portfolio.

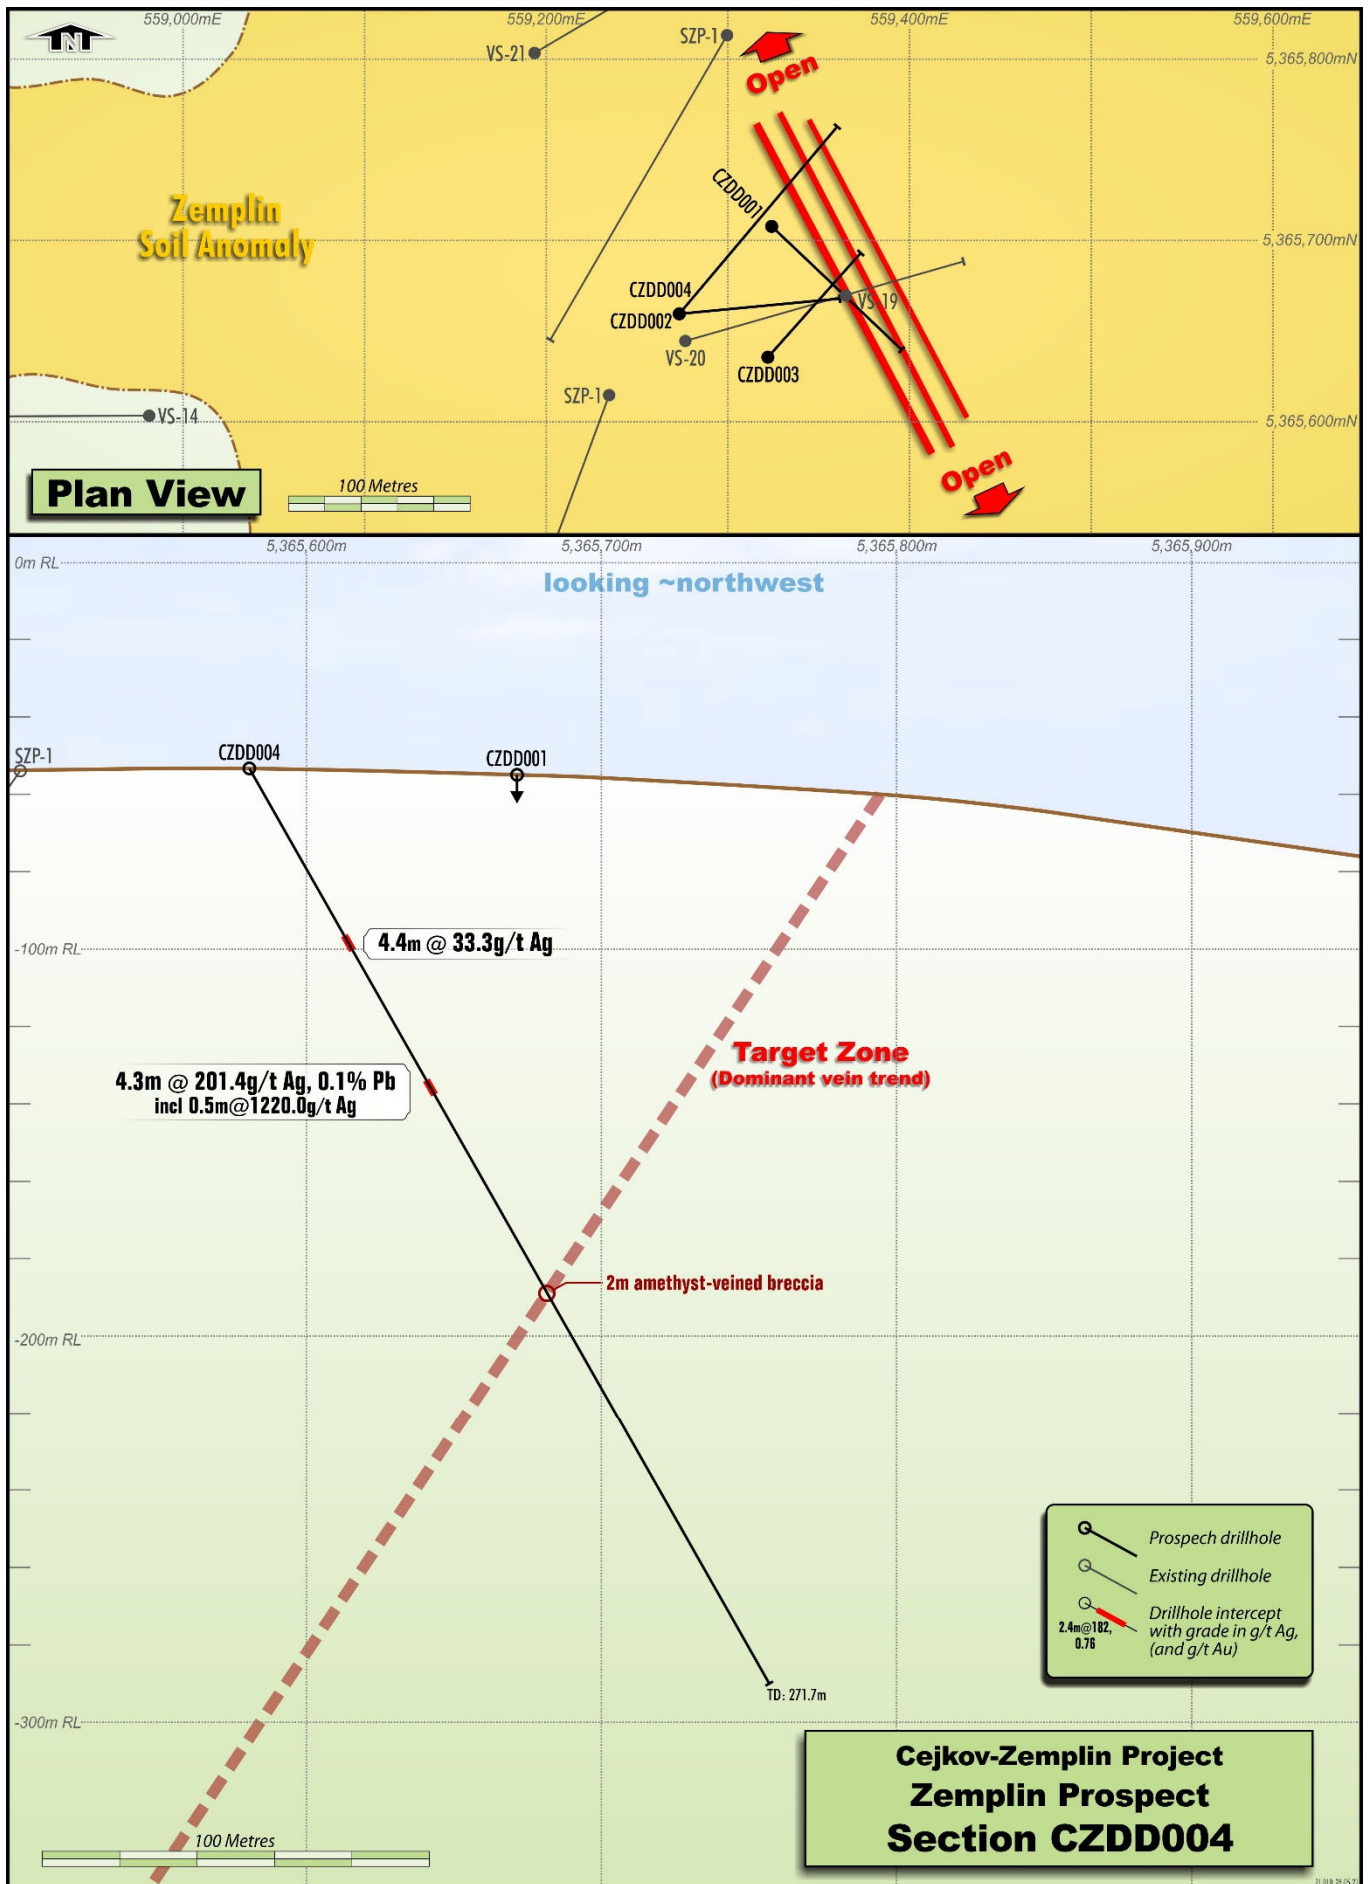

Cross section CZDD004 returned results at a shallower level than interpreted, this will result in a more northwest trending feature and drill planning is now underway for Phase II.

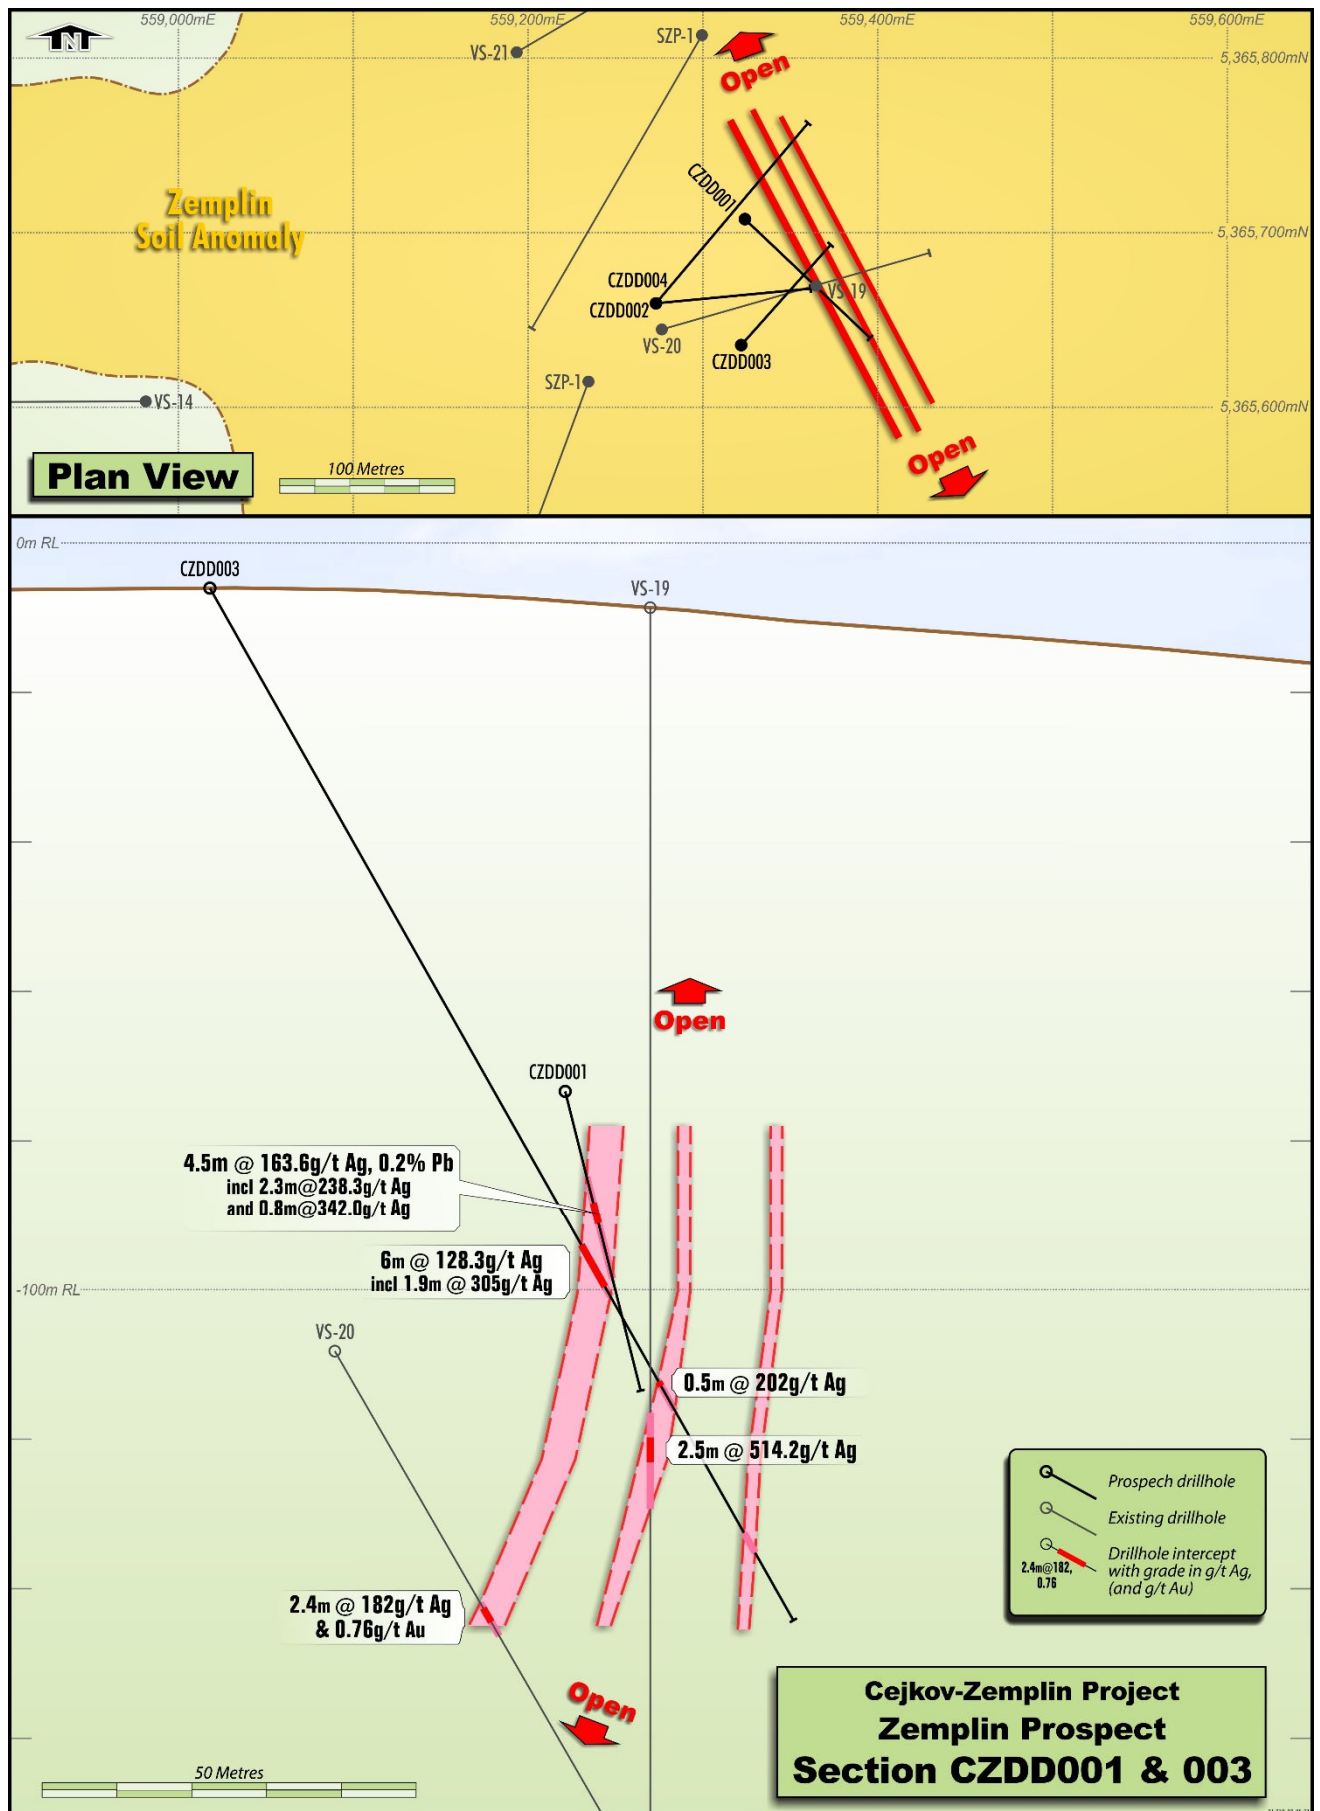

CZDD003 section through the Zemplin series of parallel structures. Prospech will now plan additional drilling after possible ground magnetics to follow extend down dip and along strike.



Example of high grade core close up of CZDD004.

Prospech Managing Director Jason Beckton comments:

“The Zemplin prospect continues to deliver encouraging results and we intend to conduct an additional drill program on receipt of complete results. Now that a high grade zone has been defined, a drill out plan seeks to extend this zone along strike and at depth.

Further west, drilling is currently underway at Prospech’s high-grade Krakauer Au-Ag prospect, within the Nova Bana Project. The first hole KVDD001 is complete at 200 metres as at 29 May, with sampling not yet commenced.”

This announcement has been approved by the Managing Director, Jason Beckton.

For further information, please contact:

Jason Beckton
Managing Director
Prospech Limited
+61 (0)438 888 612

Competent Person’s Statement

The information in this Report that relates to Exploration Results is based on information compiled by Mr Jason Beckton, who is a Member of the Australian Institute of Geoscientists. Mr Beckton, who is Managing Director of the Company, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the ‘Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves’. Mr Beckton consents to the inclusion in this Report of the matters based on the information in the form and context in which it appears.

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report.	- Rock chip grab samples not reported in this report were collected from outcrops, spoil heaps and accessible surface and underground workings of quartz veins, and zones of silicification, within Neogene volcanics under the supervision of a qualified geologist. - Sample locations were surveyed with a handheld GPS and marked into sample books.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Diamond drilling HQ3 size triple tube.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- Core is measure in the triple tube split before laying in the core boxes to ensure minimum disturbance and most accurate calculation of core recoveries. - Overall core recoveries have been very high at 98%. - Any relationship between core recovery and grade cannot be determined at this time, but due to the high core recovery, bias is considered very unlikely.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	The complete core is logged in detail by qualified geologists. Core is photographed wet and dry. All core is oriented. Detail structural measurements are collected. Core logging is a combination of qualitative and quantitative information.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- Approximately 1 to 2 Kg of material from each rock chip was sent to the laboratory for analysis. - All sampling done under supervision of a qualified geologist. - Core is manually split in to 2 equal halves using a diamond saw. The core is split along the core orientation reference line, where available. - Half-core is considered to be a high-quality and very representative method of sample. - Sample lengths are nominally 1 metre but vary to honour geological contacts.
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	- Samples are stored in a secure location in Companies storage facilities and transported to the ALS laboratory in Romania for sample preparation of fine crush, riffle split and pulverizing of 1kg to 85% < 75µm. - Pulps are analyzed by ALS Romania using method code ME-ICP61, a 33 element determination using a four acid digestion and 30 gram charge fire assay with AA finish (Au-AA25) for gold. Ore grades are analysed by OG62 – 4 acid digestion method for each element when identified. - Where Au repeatability is observed or where visible gold is observed, check assays are performed using the Screen Fire Assay technique. - Standards and blanks are included with each batch of drill core samples. - At this stage of the project, field duplicates and external laboratory checks are not employed in order to manage

Criteria	JORC Code explanation	Commentary
		costs. Should a prospect advance to the resource estimation stage, this procedure will be reviewed.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- Laboratory provides assay certificates, which are stored electronically both in ALS and Company's servers. - Laboratory CSV files are merged with GPS Location data files using unique sample numbers as the key. - No adjustments made to assay data.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- Rock chip samples are located using handheld GPS receivers with accuracy from 10-5m. - UTM projection WGS84 Zone 34N and local grid SJTSK03. Conversion between local and UTM grid is run through national certified web portal. - The topographic control, using handheld GPS, was adequate for the survey. - Drill collars are surveyed using a differential GPS or by triangulation depending of the tree cover and other environmental factors. - Downhole surveys are taken at nominal 50m intervals down the hole. Excessive deviation is not generally a problem in this field and this interval is considered sufficient. Downhole azimuth readings at magnetic and converted to Grid by adding 6.6 degrees.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	It is not yet determined whether the results from this drilling will be used in a mineral resource estimate.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- No bias is believed to be introduced by the sampling method. - Drilling is designed to intersect the target structure as close to normal as is possible given the constraints of topography and access. In this program no holes were drilled at acute angles to the target structure.
Sample security	The measures taken to ensure sample security.	Samples were delivered to ALS Minerals laboratory in Romania by Prospech trusted contractor and were not left unattended at any time. There were no incident reports from ALS lab on sample receiver cell.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No audits or reviews of the data management system have been carried out.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary																														
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.	- Prospech Limited, through subsidiaries and contractual rights, holds 100% rights on the Cejkov Zemplin tenement. - The laws of Slovakia relating to exploration and mining have various requirements. As the exploration advances specific filings and environmental or other studies may be required. There are ongoing requirements under Slovakian mining laws that will be required at each stage of advancement. Those filings and studies are maintained and updated as required by Prospech's environmental and permit advisors specifically engaged for such purposes. - The Company is the manager of operations in accordance with generally accepted mining industry standards and practices.																														
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- Anciently, the target was silver, the currency of the day, and more recently, during the Communist era, the targets were industrial base metals, copper, lead, zinc and others. As a result, much of the country, including the Company's exploration license areas, has not been subject to modern western exploration methodology or exploitation. - Communist-era base metal and coal production was substantial and smelting of aluminium and nickel (material imported from Hungary and Albania) was carried out. Coal, gold, silver, talc, anhydrite and magnesite (and limestone, dolomite and gravel), bentonite, zeolite and industrial minerals are being mined in Slovakia today. An underground gold mine on a third party mining lease enclosed within the HHBS exploration license, the Rozalia Mine, continues in operation today, trucking a gravity/flotation concentrate to a smelter in Belgium. - Communist-era gold assays used in Government and private exploration programs have been proven to be unreliable and this must be taken into account when interpreting reports from the Communist era. - Prospech holds 100% of Cejkov Zemplin Exploration Concession which has been explored in the past by the Slovak Geological Survey pre 1990s, RTZ (Rio Tinto Zinc) in the late 1990s and Arc Minerals predecessor Ortac Minerals Plc in 2011 to 2012. - The Cejkov Zemplin concession is located approximately 66 kilometres south of Eastern Regional city of Kosice in Slovakia, a country member of the European Union and Eurozone.																														
Geology	Deposit type, geological setting and style of mineralisation.	Located on the Bogrom river the Zemplin prospect is part of the 29.23 Km2, 100%-owned Cejkov-Zemplin Licence, located in eastern Slovakia. Zemplin is prospective for epithermal precious metals and base metals vein-style mineralization in Neogene Volcanics as per the company's projects at Hodrusa, Nova Bana, Rudno and Pukanec.																														
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	All below WGS 84 Zone 34N Grid Collar Coordinates <table><tr><th>DH_Collar</th><th></th><th></th><th></th><th></th></tr><tr><th>Hole_ID</th><th>UTM_East</th><th>UTM_North</th><th>RL</th><th>Max_Depth</th></tr><tr><td>CZDD001</td><td>559323</td><td>5365708</td><td>146</td><td>197.5</td></tr><tr><td>CZDD002</td><td>559273</td><td>5365660</td><td>148</td><td>177.75</td></tr><tr><td>CZDD003</td><td>559323</td><td>5365623</td><td>144</td><td>147.5</td></tr><tr><td>CZDD004</td><td>559272</td><td>5365659</td><td>148</td><td>271.7</td></tr></table>	DH_Collar					Hole_ID	UTM_East	UTM_North	RL	Max_Depth	CZDD001	559323	5365708	146	197.5	CZDD002	559273	5365660	148	177.75	CZDD003	559323	5365623	144	147.5	CZDD004	559272	5365659	148	271.7
DH_Collar																																
Hole_ID	UTM_East	UTM_North	RL	Max_Depth																												
CZDD001	559323	5365708	146	197.5																												
CZDD002	559273	5365660	148	177.75																												
CZDD003	559323	5365623	144	147.5																												
CZDD004	559272	5365659	148	271.7																												

Criteria	JORC Code explanation	Commentary																																																																																																																								
		Survey Information <table><tr><th>Hole_ID</th><th>Depth</th><th>Dip</th><th>MAG_Azimuth</th><th>UTM_Mag_Decl</th><th>UTM_Azimuth</th></tr><tr><td>CZDD001</td><td>0</td><td>-60</td><td>127.8</td><td>7.23</td><td>135.03</td></tr><tr><td>CZDD001</td><td>70</td><td>-59.56</td><td>125.18</td><td>7.23</td><td>132.41</td></tr><tr><td>CZDD001</td><td>100</td><td>-59.92</td><td>127.17</td><td>7.23</td><td>134.4</td></tr><tr><td>CZDD001</td><td>150</td><td>-59.69</td><td>124.82</td><td>7.23</td><td>132.05</td></tr><tr><td>CZDD001</td><td>196</td><td>-59.96</td><td>126.62</td><td>7.23</td><td>133.85</td></tr><tr><td>CZDD002</td><td>0</td><td>-60</td><td>78</td><td>7.23</td><td>85.23</td></tr><tr><td>CZDD002</td><td>36</td><td>-59.68</td><td>77.89</td><td>7.23</td><td>85.12</td></tr><tr><td>CZDD002</td><td>80</td><td>-60.08</td><td>77.05</td><td>7.23</td><td>84.28</td></tr><tr><td>CZDD002</td><td>130</td><td>-60.14</td><td>77.76</td><td>7.23</td><td>84.99</td></tr><tr><td>CZDD002</td><td>174</td><td>-60.05</td><td>77.78</td><td>7.23</td><td>85.01</td></tr><tr><td>CZDD003</td><td>0</td><td>-57</td><td>35</td><td>7.23</td><td>42.23</td></tr><tr><td>CZDD003</td><td>66</td><td>-57.4</td><td>34.48</td><td>7.23</td><td>41.71</td></tr><tr><td>CZDD003</td><td>114</td><td>-57.47</td><td>34.66</td><td>7.23</td><td>41.89</td></tr><tr><td>CZDD003</td><td>144</td><td>-57.83</td><td>34.38</td><td>7.23</td><td>41.61</td></tr><tr><td>CZDD004</td><td>0</td><td>-60</td><td>35</td><td>7.23</td><td>42.23</td></tr><tr><td>CZDD004</td><td>100</td><td>-60.06</td><td>32.55</td><td>7.23</td><td>39.78</td></tr><tr><td>CZDD004</td><td>150</td><td>-60.37</td><td>33.38</td><td>7.23</td><td>40.61</td></tr><tr><td>CZDD004</td><td>200</td><td>-60.6</td><td>33.67</td><td>7.23</td><td>40.9</td></tr><tr><td>CZDD004</td><td>270</td><td>-61.06</td><td>33.53</td><td>7.23</td><td>40.76</td></tr></table>	Hole_ID	Depth	Dip	MAG_Azimuth	UTM_Mag_Decl	UTM_Azimuth	CZDD001	0	-60	127.8	7.23	135.03	CZDD001	70	-59.56	125.18	7.23	132.41	CZDD001	100	-59.92	127.17	7.23	134.4	CZDD001	150	-59.69	124.82	7.23	132.05	CZDD001	196	-59.96	126.62	7.23	133.85	CZDD002	0	-60	78	7.23	85.23	CZDD002	36	-59.68	77.89	7.23	85.12	CZDD002	80	-60.08	77.05	7.23	84.28	CZDD002	130	-60.14	77.76	7.23	84.99	CZDD002	174	-60.05	77.78	7.23	85.01	CZDD003	0	-57	35	7.23	42.23	CZDD003	66	-57.4	34.48	7.23	41.71	CZDD003	114	-57.47	34.66	7.23	41.89	CZDD003	144	-57.83	34.38	7.23	41.61	CZDD004	0	-60	35	7.23	42.23	CZDD004	100	-60.06	32.55	7.23	39.78	CZDD004	150	-60.37	33.38	7.23	40.61	CZDD004	200	-60.6	33.67	7.23	40.9	CZDD004	270	-61.06	33.53	7.23	40.76
Hole_ID	Depth	Dip	MAG_Azimuth	UTM_Mag_Decl	UTM_Azimuth																																																																																																																					
CZDD001	0	-60	127.8	7.23	135.03																																																																																																																					
CZDD001	70	-59.56	125.18	7.23	132.41																																																																																																																					
CZDD001	100	-59.92	127.17	7.23	134.4																																																																																																																					
CZDD001	150	-59.69	124.82	7.23	132.05																																																																																																																					
CZDD001	196	-59.96	126.62	7.23	133.85																																																																																																																					
CZDD002	0	-60	78	7.23	85.23																																																																																																																					
CZDD002	36	-59.68	77.89	7.23	85.12																																																																																																																					
CZDD002	80	-60.08	77.05	7.23	84.28																																																																																																																					
CZDD002	130	-60.14	77.76	7.23	84.99																																																																																																																					
CZDD002	174	-60.05	77.78	7.23	85.01																																																																																																																					
CZDD003	0	-57	35	7.23	42.23																																																																																																																					
CZDD003	66	-57.4	34.48	7.23	41.71																																																																																																																					
CZDD003	114	-57.47	34.66	7.23	41.89																																																																																																																					
CZDD003	144	-57.83	34.38	7.23	41.61																																																																																																																					
CZDD004	0	-60	35	7.23	42.23																																																																																																																					
CZDD004	100	-60.06	32.55	7.23	39.78																																																																																																																					
CZDD004	150	-60.37	33.38	7.23	40.61																																																																																																																					
CZDD004	200	-60.6	33.67	7.23	40.9																																																																																																																					
CZDD004	270	-61.06	33.53	7.23	40.76																																																																																																																					
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	- The default sample interval is 1 metre but this may vary to take into account geological boundaries. Aggregate intercepts are length-weighted and no cutting of high grades is considered necessary. - Metal equivalents are not reported																																																																																																																								
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	- Two drill holes results returned from four-hole program. - CZDD001: 4.5m @ 163 g/t Ag from 85.3m - Including 3.6m @ 238 g/t Ag from 87.5m - CZDD003: 6m @ 117 g/t Ag from 94m - Including 1.85m @ 305 g/t Ag from 97.15m - Including 0.85m @ 488 g/t Ag from 98.15m - CZDD003: 0.75m @ 202 g/t Ag from 113.7m - Individual assay results for all samples with anomalous Au or Ag are tabled below, true widths are estimated at 75% of below downholes widths based on preliminary interpretations.																																																																																																																								

Criteria

JORC Code explanation

Commentary

				Au-AA25	ME-ICP61	ME-ICP61	ME-ICP61	ME-ICP61
				Au	Ag	Cu	Pb	Zn
Hole_ID	mFrom	mTo	SampleID	ppm	ppm	ppm	ppm	ppm
CZD0001	83	84	M663716	-0.01	4.2	42	234	111
CZD0001	84	85.5	M663717	-0.01	11.6	9	295	76
CZD0001	85.3	86.5	M663718	-0.01	23.8	463	1085	495
CZD0001	86.5	87.5	M663719	-0.01	79	177	1650	638
CZD0001	87.5	88.5	M663720	0.02	83.00	58	1855	230
CZD0001	88.5	89	M663721	0.01	130.00	184	1960	570
CZD0001	89	89.5	M663722	0.01	243.00	84	1175	815
CZD0001	89.8	91	M663723	0.01	5	39	419	360
CZD0001	91	92	M663724	-0.01	1.2	24	695	1320
CZD0001	92	93	M663725	-0.01	2.1	23	169	1390
CZD0001	93	94	M663727	-0.01	-0.5	16	225	709
CZD0001	94	95	M663726	0.01	6	44	453	1120
CZD0001	95	96	M663729	-0.01	-0.5	22	61	1780
CZD0001	96	97	M663730	-0.01	0.6	23	27	1750
CZD0001	109	110	M663731	0.02	8.3	27	793	530
CZD0001	110	111	M663732	-0.01	5.4	29	1090	971
CZD0001	111	112	M663733	-0.01	4.9	29	135	2050
CZD0001	112	113	M663734	-0.01	2.8	39	402	954
CZD0001	113	114	M663735	-0.01	4.9	71	657	441
CZD0001	114	115	M663736	-0.01	6.8	61	381	1200
CZD0001	115	116	M663737	-0.01	10.6	67	545	928
CZD0001	116	117	M663738	-0.01	7.7	70	531	945
CZD0001	117	118	M663739	-0.01	1.1	27	158	497
CZD0001	118	119	M663740	-0.01	5.5	32	541	566
CZD0001	119	120	M663741	-0.01	8.2	64	292	360
CZD0001	120	121	M663742	-0.01	1.3	36	96	194
CZD0001	121	122	M663743	-0.01	2.4	23	132	261
CZD0001	122	123	M663744	-0.01	1.5	21	109	199
CZD0001	123	124	M663745	-0.01	6.3	36	387	781
CZD0001	124	125	M663746	-0.01	1.9	24	74	205
CZD0001	125	126	M663747	-0.01	3.3	40	275	2120
CZD0001	126	127	M663748	0.01	8.2	39	418	1570
CZD0001	127	128	M663749	-0.01	17.2	103	1670	3350
CZD0001	128	129	M663751	0.01	25	170	1010	1930
CZD0001	129	129.8	M663752	0.02	6.6	41	754	2910
CZD0001	129.8	130.8	M663753	0.72	11.6	25	113	2520
CZD0001	130.8	132	M663754	-0.01	6	103	648	2490
CZD0001	132	133	M663755	0.01	6.4	35	170	461
CZD0001	133	134	M663756	-0.01	14.9	151	632	2800
CZD0001	134	135	M663757	-0.01	21.7	85	2850	2850
CZD0001	135	135.6	M663758	-0.01	14.1	410	3360	10560
CZD0001	135.6	137	M663759	-0.01	8.8	66	509	2550
CZD0001	137	138	M663760	0.01	14.3	197	644	2520
CZD0001	138	139	M663761	0.06	19.1	71	360	2075
CZD0001	139	140	M663762	-0.01	20.5	88	220	677
CZD0001	140	141	M663763	-0.01	8.5	55	171	777
CZD0001	141	142	M663764	-0.01	7.3	50	264	1100
CZD0001	142	143	M663765	-0.01	8.2	43	246	665
CZD0001	143	144	M663766	-0.01	2.1	26	103	837
CZD0001	144	145	M663767	-0.01	7.6	38	136	572
CZD0001	145	146	M663768	-0.01	13.2	53	277	495
CZD0001	146	147	M663769	-0.01	15.9	56	360	650
CZD0001	147	148	M663770	0.08	15.2	52	374	1395
CZD0001	148	149	M663771	-0.01	6.8	40	158	527
CZD0001	149	150	M663772	-0.01	6.4	73	157	1160
CZD0001	150	151	M663773	0.05	6.1	29	139	249
CZD0001	151	152	M663774	0.06	5.1	32	89	352
CZD0001	152	153	M663776	0.04	1.2	20	30	572
CZD0001	153	154	M663777	-0.01	-0.5	24	29	481
CZD0001	154	155	M663778	0.01	6.4	30	148	546
CZD0001	155	156	M663779	-0.01	2	20	51	406
CZD0001	156	157	M663780	-0.01	2.1	21	179	501
CZD0001	157	158	M663781	-0.01	3.5	23	127	413
CZD0001	158	158.5	M663782	0.02	9.4	44	1030	2640
CZD0001	158.5	159	M663783	0.03	7.5	16	337	1320
CZD0001	159	159.5	M663784	0.08	25.2	33	271	2240
CZD0001	159.5	160	M663785	0.03	29.3	70	276	3050
CZD0003	79.5	80.5	M663786	0.02	6.3	22	85	59
CZD0003	80.5	81.5	M663787	0.01	18.4	29	68	70
CZD0003	81.5	82.5	M663788	-0.01	14.4	62	147	190
CZD0003	82.5	83.5	M663789	-0.01	34.3	44	348	124
CZD0003	83.5	84.5	M663790	-0.01	11.6	70	392	286
CZD0003	84.5	85.5	M663791	-0.01	15.6	66	153	236
CZD0003	94	95	M663792	-0.01	39.2	42	1060	199
CZD0003	95	96	M663793	-0.01	45.8	74	1370	111
CZD0003	96	97.15	M663794	-0.01	43.8	24	1490	121
CZD0003	97.15	98.15	M663795	0.01	123	36	1360	127
CZD0003	98.15	99	M663796	0.03	168.00	82	1480	250
CZD0003	99	100	M663797	-0.01	30.1	683	1050	73
CZD0003	100	101	M663798	-0.01	11.9	360	272	109
CZD0003	101	102	M663799	-0.01	3	24	86	582
CZD0003	113.7	114.2	M663801	-0.01	102	197	570	1950
CZD0003	114.2	114.7	M663802	-0.01	9.9	63	747	1920
CZD0003	114.7	116	M663803	-0.01	3.5	31	133	1130
CZD0003	122	123	M663804	-0.01	7.8	51	282	1360
CZD0003	123	124	M663805	-0.01	7.6	86	253	1420
CZD0003	138	139.7	M663806	0.01	4.2	38	375	1360
CZD0003	138.7	140	M663807	-0.01	2.6	23	81	265
CZD0003	140	141.1	M663808	-0.01	1.4	20	44	235
CZD0003	141.1	142	M663809	0.01	2.2	20	53	215
CZD0003	142	143	M663810	0.02	7.3	35	161	384
CZD0003	143	143.8	M663811	-0.01	-0.5	1	2	15
CZD0003	143.8	144.7	M663812	0.01	22.9	25	94	411
CZD0003	144.7	146	M663813	0.02	2.4	22	40	266

Criteria

JORC Code explanation

Commentary

Hole_ID	mFrom	mTo	SampleID	Au-AA25	ME-ICP61	ME-ICP61	ME-ICP61	ME-ICP61	ME-ICP61
				Au ppm	Ag ppm	Cu ppm	Pb ppm	Zn ppm	
CZDD0004	22	23	M663814	0.01	-0.05	11	23	67	
CZDD0004	23	24	M663815	-0.01	-0.05	13	21	65	
CZDD0004	24	25	M663816	-0.01	-0.05	15	25	57	
CZDD0004	29	30	M663817	-0.01	0.5	12	20	50	
CZDD0004	30	31	M663818	-0.01	-0.05	13	28	39	
CZDD0004	31	32	M663819	-0.01	-0.05	19	30	83	
CZDD0004	34	35	M663820	-0.01	0.5	23	30	102	
CZDD0004	35	36	M663821	-0.01	0.5	13	22	91	
CZDD0004	36	37	M663822	-0.01	0.5	20	14	87	
CZDD0004	37	38	M663823	0.01	-0.05	13	24	100	
CZDD0004	38	39	M663824	0.01	-0.05	11	33	119	
CZDD0004	39	40	M663826	-0.01	-0.05	12	47	145	
CZDD0004	42	43	M663827	-0.01	1	13	28	138	
CZDD0004	43	44	M663828	-0.01	-0.05	13	37	145	
CZDD0004	44	45	M663829	0.01	-0.05	15	25	120	
CZDD0004	45	46	M663830	0.01	0.7	17	40	83	
CZDD0004	46	47	M663831	-0.01	1.1	14	23	62	
CZDD0004	49.6	51	M663832	0.01	43.6	36	345	87	
CZDD0004	51	52	M663833	0.01	24.8	35	138	66	
CZDD0004	52	53	M663834	0.01	38.3	28	149	34	
CZDD0004	53	54	M663835	0.01	26.5	33	154	50	
CZDD0004	58	58.7	M663836	-0.01	6.2	22	73	88	
CZDD0004	58.7	60	M663837	-0.01	11.6	52	115	91	
CZDD0004	60	61.1	M663838	0.03	25.4	109	117	183	
CZDD0004	61.1	62	M663839	-0.01	7.2	40	44	58	
CZDD0004	62	63	M663840	0.01	5.8	35	57	60	
CZDD0004	63	64	M663841	0.02	14.2	62	126	161	
CZDD0004	64	64.7	M663842	-0.01	4.4	35	58	92	
CZDD0004	64.7	66.2	M663843	-0.01	2.8	19	44	89	
CZDD0004	66.2	67.7	M663844	-0.01	5.7	29	83	85	
CZDD0004	67.7	69	M663845	0.05	17	68	104	111	
CZDD0004	69	70	M663846	0.03	19	73	96	126	
CZDD0004	70	71	M663847	0.01	8	23	34	59	
CZDD0004	71	72	M663848	-0.01	6.2	22	46	81	
CZDD0004	72	73	M663849	0.02	6.4	17	24	60	
CZDD0004	73	74	M663851	0.13	4.1	23	28	50	
CZDD0004	74	75	M663852	0.07	9.5	25	43	57	
CZDD0004	75	76	M663853	-0.01	5.6	44	32	71	
CZDD0004	76	77	M663854	0.01	5	61	56	121	
CZDD0004	83	84	M663855	0.03	7.1	14	21	57	
CZDD0004	84	85	M663856	0.02	2.1	4	33	40	
CZDD0004	85	86	M663857	0.01	4.4	12	42	53	
CZDD0004	86	87	M663858	-0.01	3.8	15	96	65	
CZDD0004	87	88	M663859	0.03	12	15	311	64	
CZDD0004	88	89	M663860	0.01	9.8	19	280	66	
CZDD0004	89	90	M663861	0.01	2.7	10	39	55	
CZDD0004	90	91	M663862	-0.01	2.3	11	42	77	
CZDD0004	91	92.5	M663863	-0.01	11.2	16	291	78	
CZDD0004	92.5	93	M663864	0.02	1220	31	974	177	
CZDD0004	93	94	M663865	-0.01	37.1	46	917	100	
CZDD0004	94	95	M663866	-0.01	70	84	986	352	
CZDD0004	95	96.8	M663867	0.01	82.7	74	1260	252	
CZDD0004	96.8	98.5	M663868	-0.01	4.7	41	436	234	
CZDD0004	98.5	99.5	M663869	-0.01	1.8	18	184	127	
CZDD0004	99.5	100	M663870	0.03	11	33	133	140	
CZDD0004	149	150	M663871	0.1	3.5	31	57	722	
CZDD0004	150	151	M663872	-0.01	-0.05	19	7	343	
CZDD0004	151	152	M663873	-0.01	0.7	20	16	364	
CZDD0004	152	153	M663874	-0.01	2.7	71	278	330	
CZDD0004	153	154	M663876	0.03	3.8	36	83	379	
CZDD0004	154	155	M663877	-0.01	-0.05	19	8	656	
CZDD0004	164	165	M663878	-0.01	3.3	22	34	401	
CZDD0004	165	166	M663879	0.01	2.3	21	17	146	
CZDD0004	166	167	M663880	0.01	0.9	14	7	230	
CZDD0004	175	176	M663881	-0.01	1.2	18	15	282	
CZDD0004	176	177	M663882	-0.01	-0.05	17	7	314	
CZDD0004	177	178	M663883	-0.01	1.6	22	18	185	
CZDD0004	178	179	M663884	0.01	3.5	26	44	94	
CZDD0004	179	180	M663885	0.01	4.5	30	49	106	
CZDD0004	186	187	M663886	0.01	1.8	18	20	205	
CZDD0004	187	188	M663887	0.01	2.9	19	30	168	
CZDD0004	188	189	M663888	0.01	3.6	20	39	661	
CZDD0004	189	190	M663889	-0.01	2.8	24	78	440	
CZDD0004	190	191	M663890	0.01	2.8	33	81	484	
CZDD0004	191	192	M663891	-0.01	1.5	18	29	215	
CZDD0004	192	193	M663892	-0.01	-0.05	17	9	244	
CZDD0004	193	194	M663893	-0.01	-0.05	17	14	389	
CZDD0004	194	195	M663894	0.01	-0.05	16	12	461	
CZDD0004	206	207	M663895	-0.01	1.6	18	35	299	
CZDD0004	207	208	M663896	0.03	5.4	19	597	729	
CZDD0004	208	209	M663897	0.01	2.5	24	30	500	
CZDD0004	209	210	M663898	0.22	5	29	94	253	
CZDD0004	210	211	M663899	0.02	4.6	26	44	189	
CZDD0004	211	212	M663901	0.01	2.1	19	27	119	
CZDD0004	212	213	M663902	0.04	3.6	24	41	105	
CZDD0004	213	214	M663903	0.02	4.1	24	45	96	
CZDD0004	214	215	M663904	0.02	4.4	26	45	103	
CZDD0004	215	216	M663905	0.01	3.5	21	32	130	
CZDD0004	221	222	M663906	0.01	2.2	21	36	531	
CZDD0004	222	223	M663907	0.01	4.6	32	164	889	
CZDD0004	223	224	M663908	0.01	4	24	83	528	
CZDD0004	224	225	M663909	0.02	4	21	58	363	
CZDD0004	225	226	M663910	0.01	-0.05	19	50	464	
CZDD0004	232	233	M663911	0.02	3	65	453	1730	
CZDD0004	233	234	M663912	0.02	5.9	38	259	674	
CZDD0004	234	235	M663913	0.01	-0.05	21	74	314	
CZDD0004	235	236	M663914	0.01	0.5	23	20	318	
CZDD0004	236	237	M663915	-0.01	1.1	25	76	586	
CZDD0004	237	238	M663916	0.02	9.1	30	267	2180	
CZDD0004	238	239	M663917	0.04	8.8	38	400	755	
CZDD0004	239	240	M663918	0.02	7.7	26	157	661	
CZDD0004	240	241	M663919	0.01	3.4	23	47	205	
CZDD0004	241	242	M663920	0.01	4.1	24	48	153	
CZDD0004	242	243	M663921	0.02	3.2	23	33	136	
CZDD0004	243	244	M663922	0.01	5.7	23	41	99	
CZDD0004	244	245	M663923	0.01	7.2	51	239	721	
CZDD0004	245	246	M663924	0.02	7	27	127	409	
CZDD0004	246	247	M663926	0.01	5.8	52	216	801	
CZDD0004	247	248	M663927	0.01	2.2	64	765	1840	
CZDD0004	248	249	M663928	0.02	10.1	117	624	1590	
CZDD0004	249	250	M663929	0.01	5.9	44	187	927	
CZDD0004	250	251	M663930	0.04	10.2	99	685	1100	
CZDD0004	251	252	M663931	0.03	7.6	30	108	278	
CZDD0004	252	253	M663932	0.02	6.8	25	84	219	
CZDD0004	253	254	M663933	0.03	9.2	45	282	811	
CZDD0004	254	255	M663934	0.03	5.8	37	143	461	
CZDD0004	255	256	M663935	0.03	3.9	40	513	1300	
CZDD0004	256	257	M663936	0.01	0.7	22	28	289	

Criteria	JORC Code explanation	Commentary
<i>Diagrams</i>	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	The location and results received for drill-core samples are displayed in the attached maps and/or tables. Coordinates are UTM Zone 34N.
<i>Balanced reporting</i>	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Results for all mineralised samples collected in this program are displayed on the attached maps and/or tables.
<i>Other substantive exploration data</i>	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No metallurgical or bulk density tests were conducted at the project by Prospech.
<i>Further work</i>	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Prospech is in the processing of submitting samples of the remaining drill core for analysis. Depending on the results, further drilling may be carried out at Zemplin.

pjn10835