

30 July 2025



HIGH GRADE, MULTI-LODE GOLD SYSTEM EXPANDED TO OVER 1KM STRIKE AT LITTLE GEM

Little Gem Highlights:

- 16 hole Phase 2 drilling program now complete with all assays returned
- Phase 2 drilling has confirmed a multi-lode gold mineralised system at Little Gem, with high gold grades and large lode widths
- **Significantly, Hole LGDD25008 returned 8.8m @ 6.3g/t at a depth of 320 metres below surface. This hole is 400 metres north of LGDD25005 (22.7m @ 5.0g/t)**
- Drilling has defined multiple lodes at the Little Gem prospect, with the Company having modelled four of these, namely the Diamond Lode, Ruby Lode, Sapphire Lode and the Tanzanite lode
- The LGDD25008 intersection shows that the prospective strike of a well-developed high-grade shoot on the Diamond Lode is over 1,000 metres and remains open at depth (See figure 3)
- **Phase 3 follow up drilling program of 38 holes** has commenced with two diamond rigs and one RC rig currently active on the program. This drilling will target multiple lodes of the Little Gem system from the surface down to 500 metres, with some deeper drill testing of the system down to 750 metres below surface planned

Ora Banda Mining Limited (ASX: OBM) ("Ora Banda", "Company") is pleased to provide an update on its continued exploration success at the Little Gem prospect.

Subsequent to the highly successful five hole drill program (Phase 1 drill program) at Little Gem which returned **22.7m @ 5.0 g/t** and **10.9m @ 6.4g/t**, Ora Banda committed to a 16-hole broad spaced diamond drilling program across Little Gem and Sunraysia (Phase 2 drill program) to test the prospective carbonate horizons over 4.7 kms and down to a depth of 400 vertical metres below the surface. The Phase 2 drill program is now complete with assays now having been returned (See Figure 2).

The Phase 2 drill program was planned as very broad spaced (400-metre section lines), early-stage drill testing of the greenfields potential of the Little Gem – Sunraysia system. Excitingly the program has confirmed a multi-lode system displaying strong tenor with high gold grades and large lode widths at Little Gem. Mineralised shoot development and geometry is now becoming apparent, although exploration remains at an "early stage".

Significantly for the Phase 2 program, Hole LGDD25008, on a 400-metre step out to the north of LGDD25005 (22.7m @ 5.0g/t) and targeting the Diamond Lode has returned 8.8m @ 6.3g/t at a depth of 320 metres below surface (See Figure 3). This intersection shows that the prospective strike of a well developed high grade shoot on the Diamond Lode has a potential strike length in excess of 1,000 metres and depth extents of at least 400 metres below surface.

Drilling has defined multiple lodes at the Little Gem prospect, with the Company having now modelled four of these, namely the Diamond Lode, Ruby Lode, Sapphire Lode and the Tanzanite lode (See Figure 3, 4 and 5). The Diamond and Ruby Lodes remain the priority targets for the immediate Phase 3 drilling program, with the other lodes being tested over the course of FY26.

Structural readings taken during the Phase 2 drilling program indicate that the structural architecture of the mineralised system is like Riverina, characterised by steeply dipping lodes and moderately south plunging folds and boudins. These plunging structures control shoot geometry at Riverina and are anticipated to have a similar effect on Little Gem. As with Riverina, at this early stage the lode surfaces appear continuous and linear.

Significantly, the mafic units to the west of the Little Gem prospect and which host the Riverina Mine to the north, remains largely untested by drilling. Drill testing of this prospective mafic sequence will happen in conjunction with this Phase 3 program.

The current Phase 3 drilling program is designed and laid out on an 80 metre line spacing with a 160 metre hole spacing, with a clear focus on infilling and extending the broad high-grade shoots associated with the Diamond and Ruby lodes. Additional exploration drilling will be undertaken in parallel with this, focused on the continued testing of the broader mineralised system.

Ora Banda's Managing Director, Luke Creagh, said:

"These results continue to expand the potential of Little Gem as a large-scale, high grade and multi-lode system. These results demonstrate a potential strike length in excess of 1,000 metres and the system remains open at depth."

"The 38 hole Phase 3 program at Little Gem will provide significant drill coverage of the interpreted high-grade lodes to rapidly advance our understanding of the size and scale of the system"

"The Little Gem trend is one of multiple drill programs we have commenced as part of the \$73 million allocated to exploration and resource development drilling in FY26 and we are looking forward to results from all of these programs."

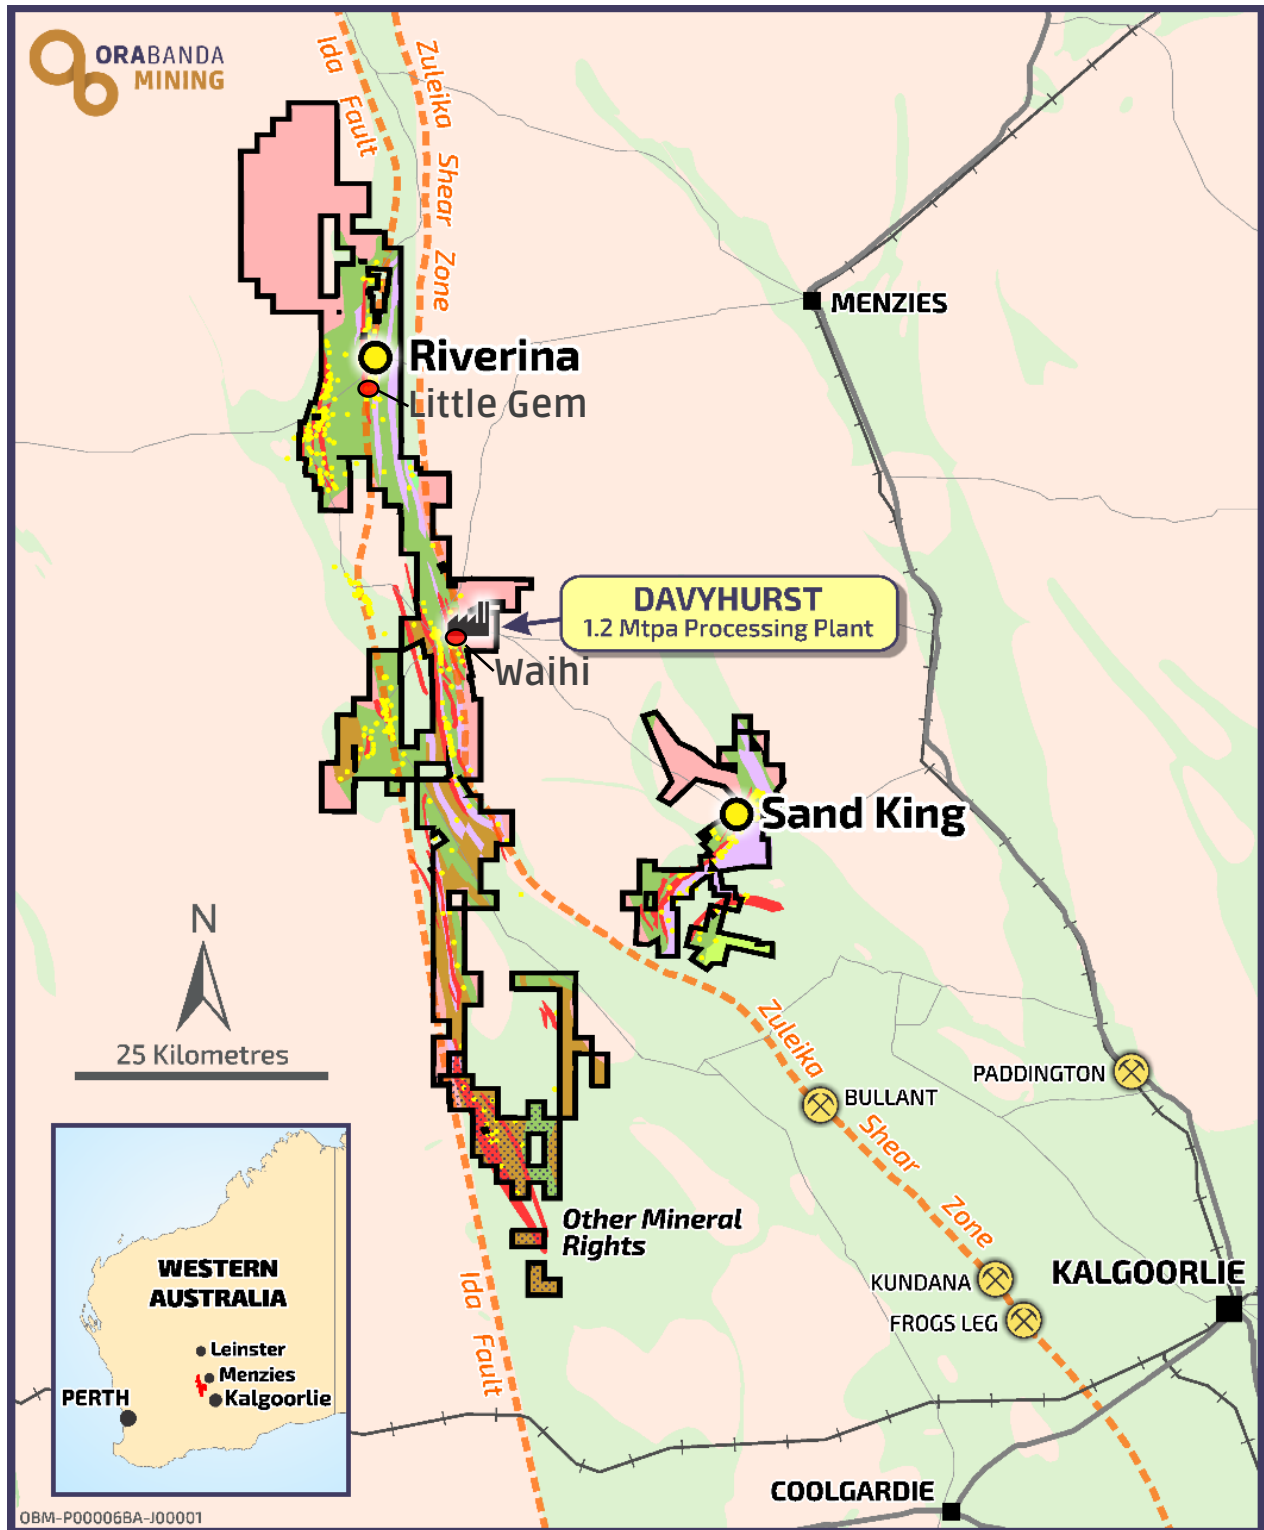


Figure 1 – Overview showing location of Riverina Underground, Little Gem compared to Davyhurst processing hub.

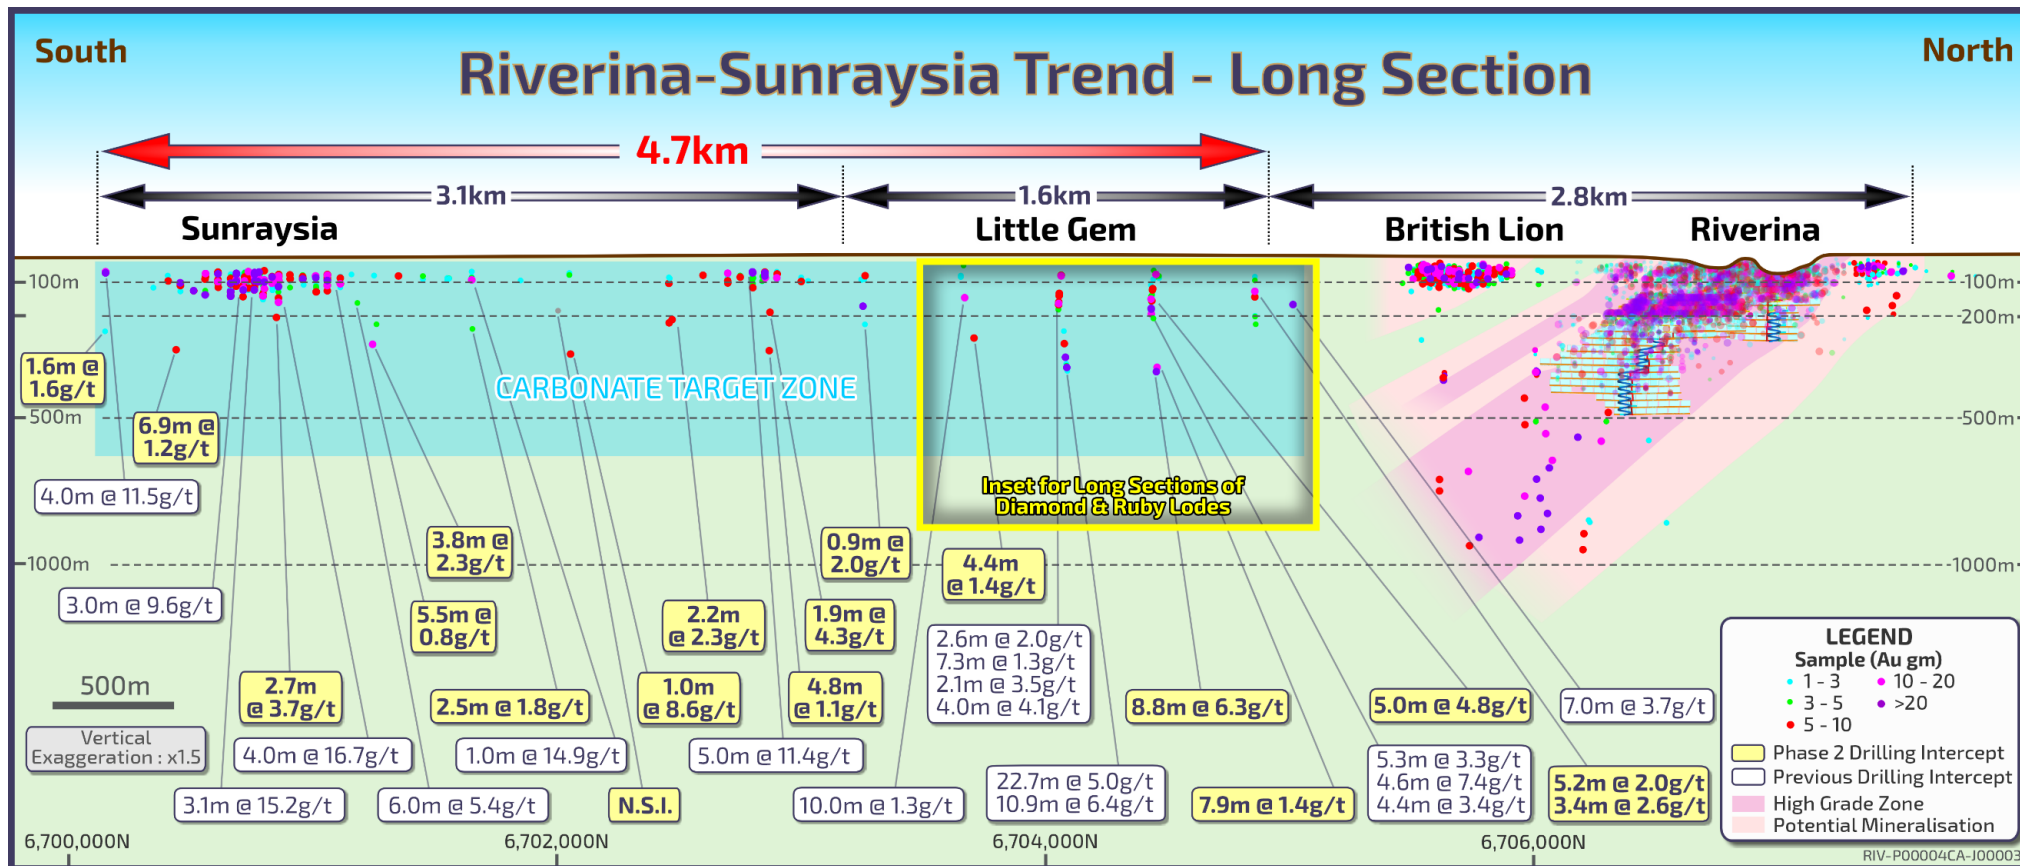


Figure 2 – Long Section of the Little Gem – Sunraysia trend in relation to the Riverina Underground Mine. See Diamond and Ruby Lode inset long sections below.

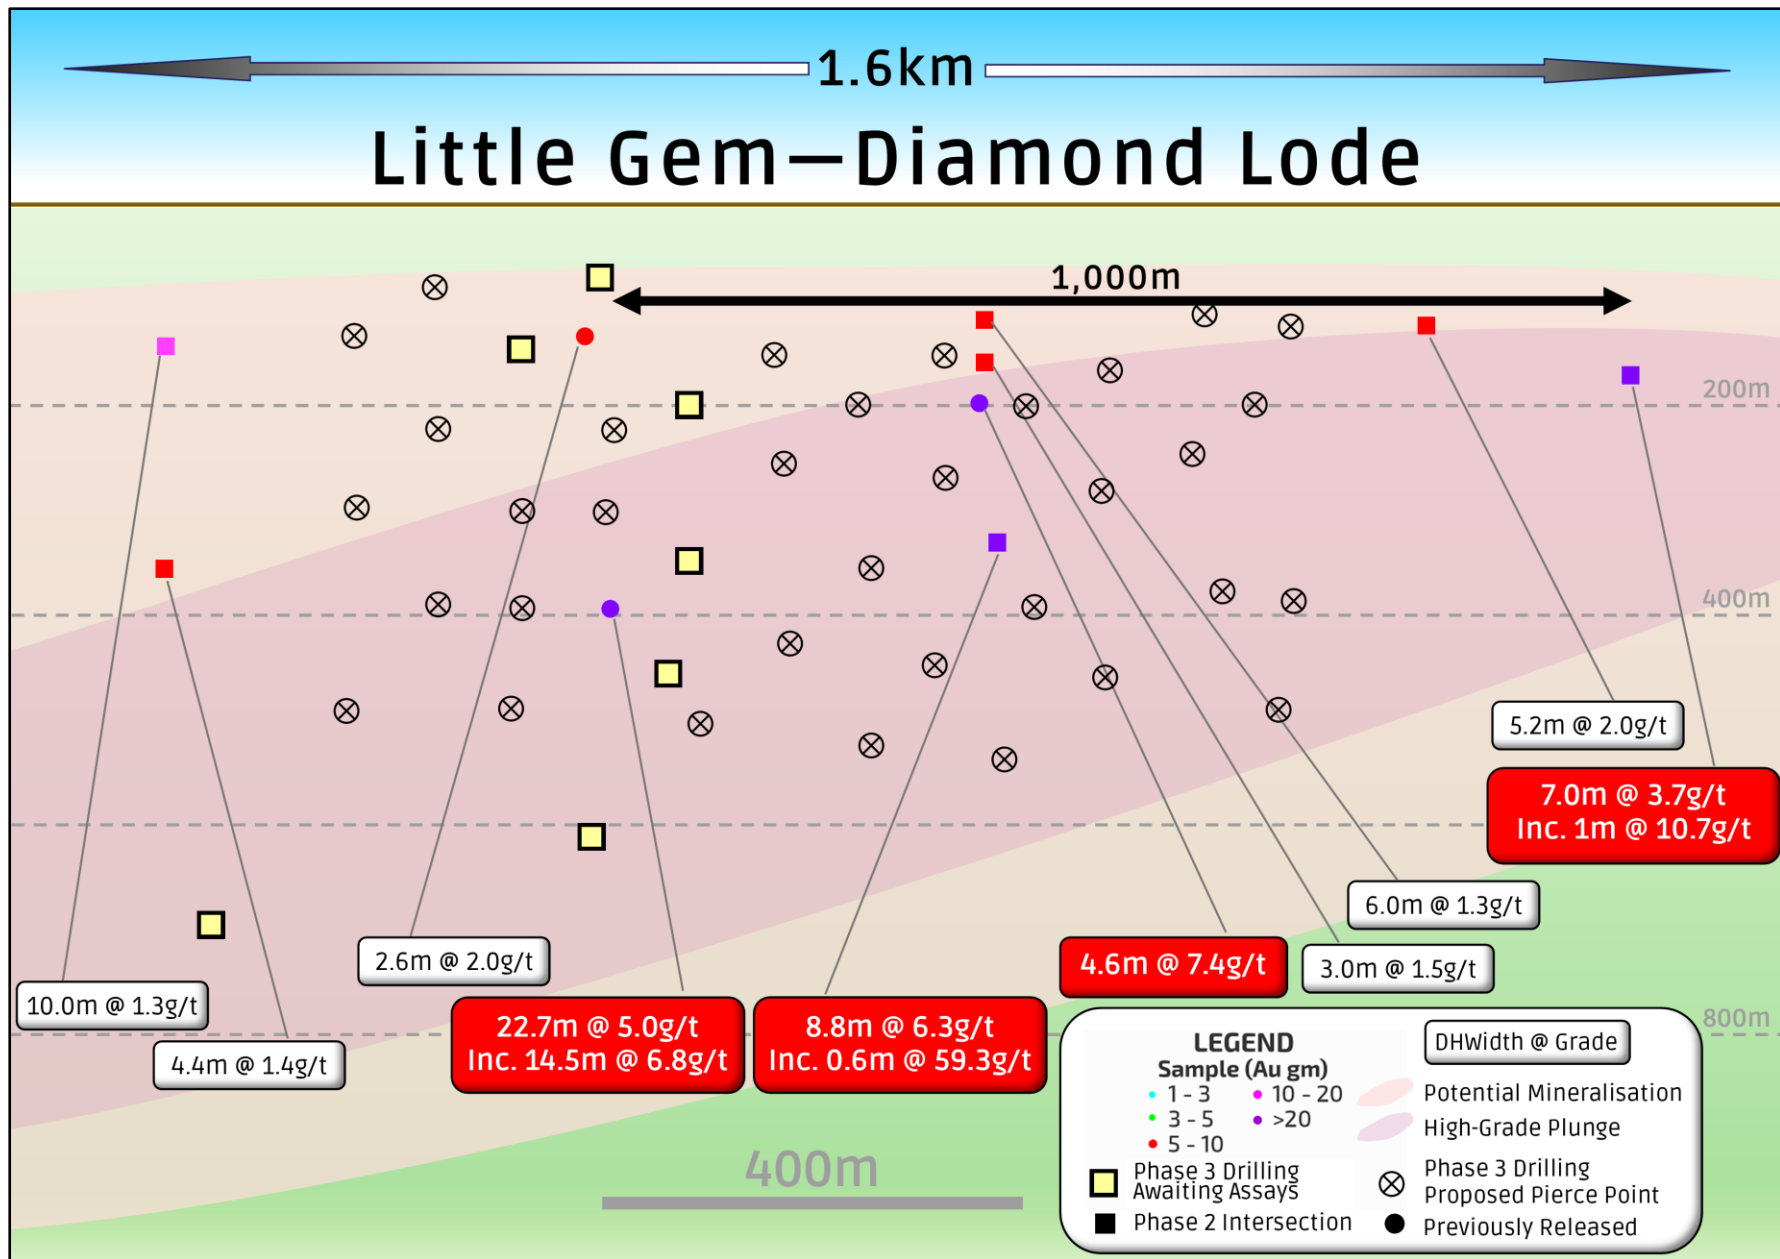


Figure 3 – Zoomed in long section of the Diamond Lode, which is part of the Little Gem multi-lode system (looking west).

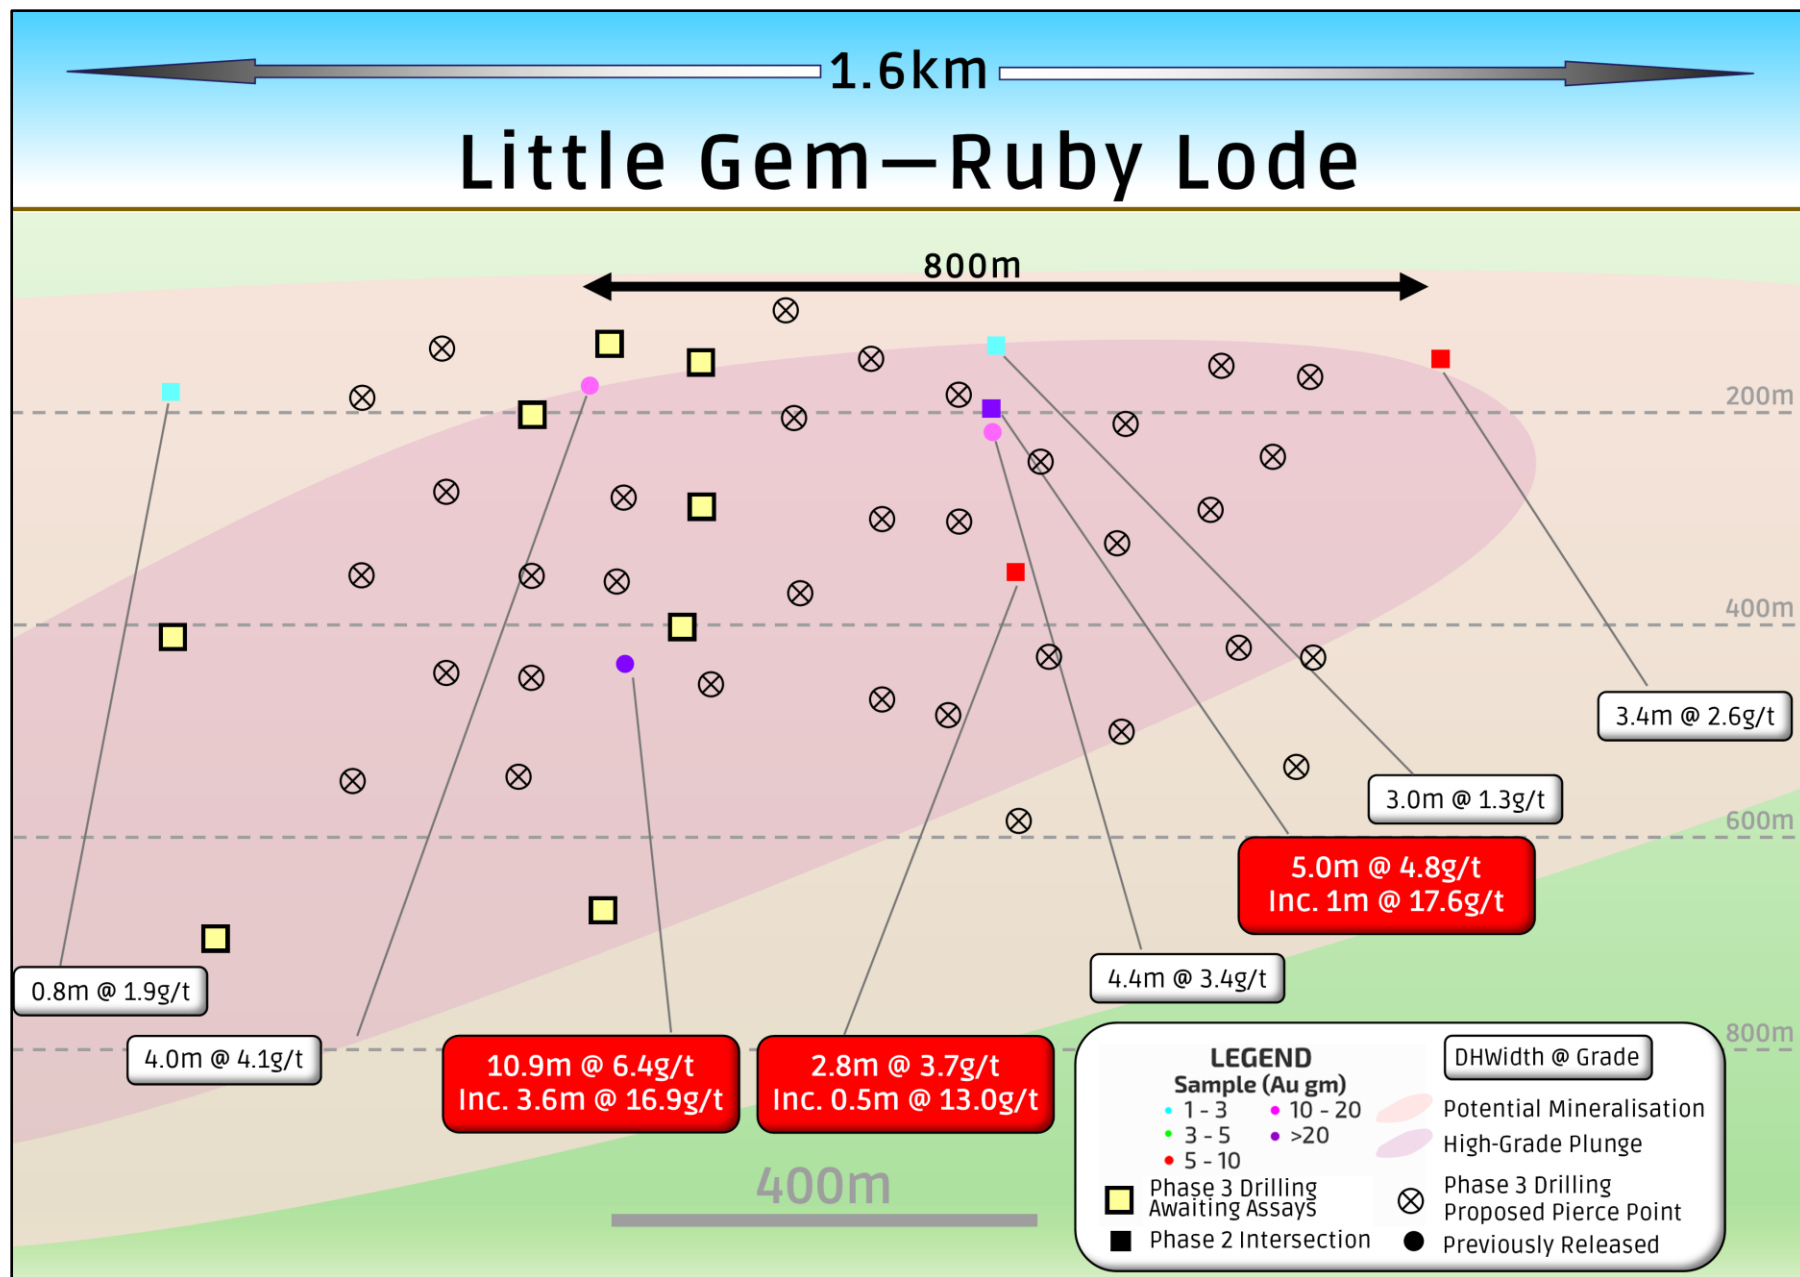


Figure 4 – Zoomed in long section of the Ruby Lode, which is part of the Little Gem multi-lode system (looking west).

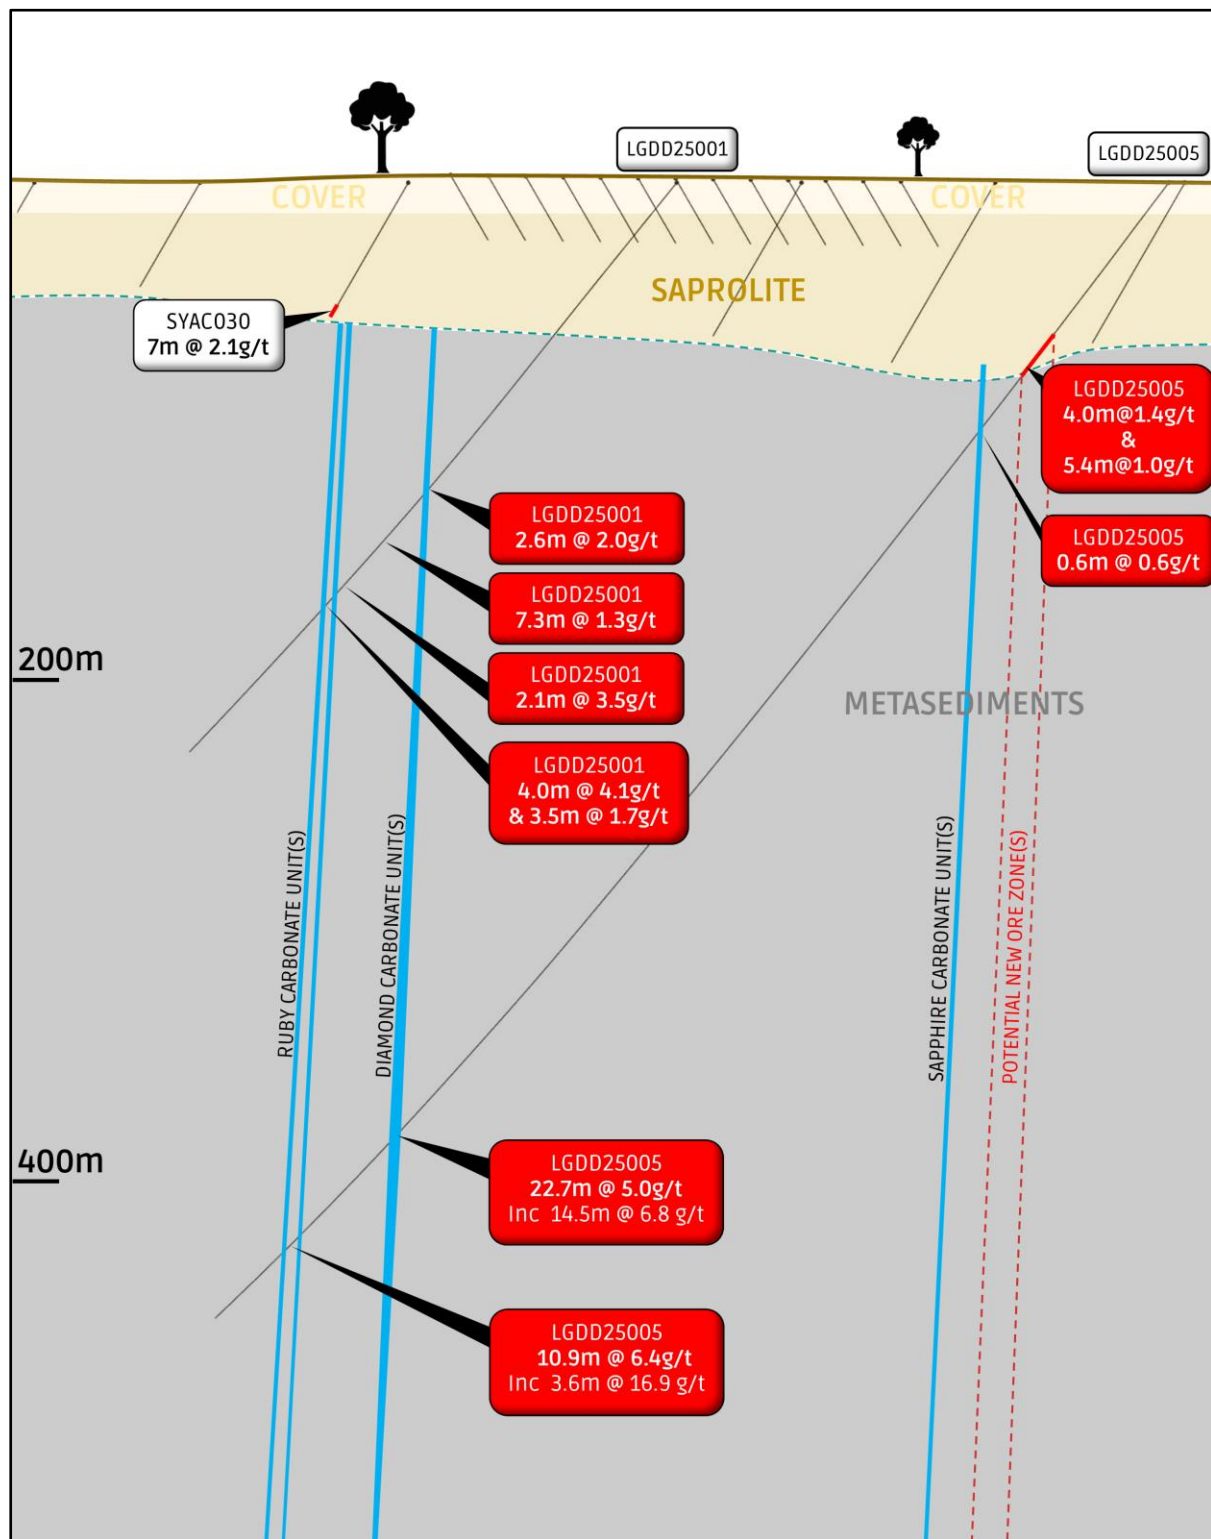


Figure 5– Cross section (6704 070N) looking north showing multi lode relationships at Little Gem hosted within the Eastern Metasediments.

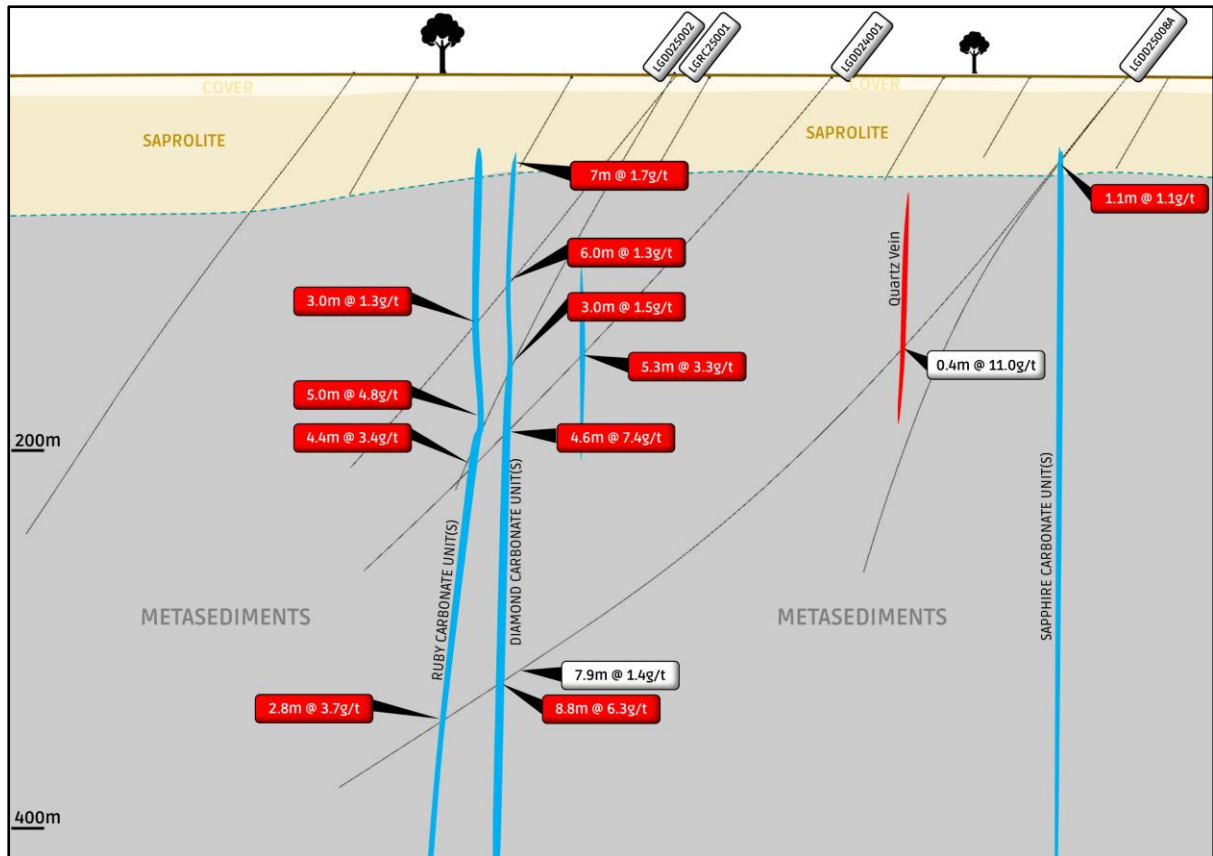


Figure 5– Cross section (6704 440N) looking north showing multi lode relationships at Little Gem hosted within the Eastern Metasediments.

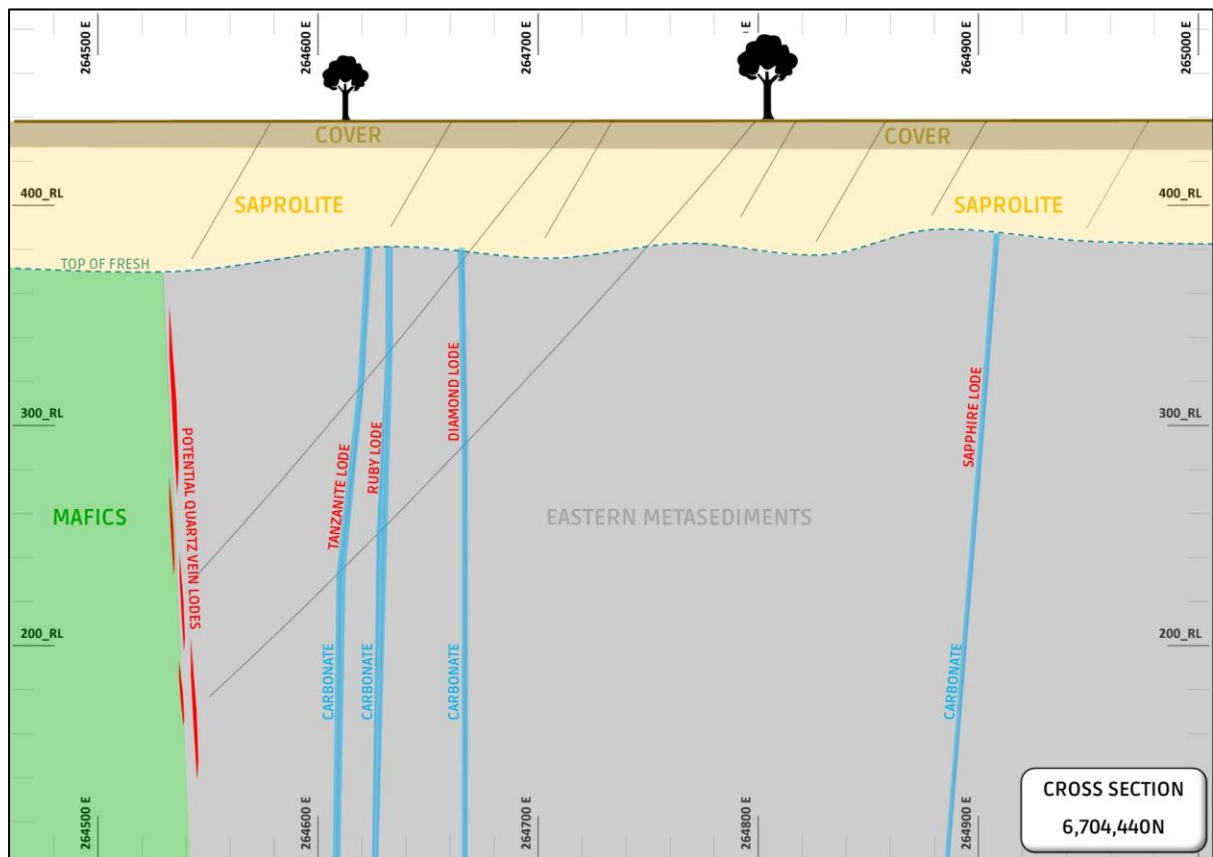


Figure 6– Cross section looking north showing multi lode Little Gem system in relation to the western mafic units that host the Riverina Mine to north. These mafic units remain largely untested at this location.

This announcement was authorised for release to the ASX by the Ora Banda Board of Directors. For further information about Ora Banda Mining Ltd and its projects please visit the Company's website at www.orabandamining.com.au.

Investor & Media Queries:

Luke Creagh
Managing Director
+61 8 6365 4548
admin@obmltd.com.au

Competent Persons Statement

The information in this announcement that relates to new exploration results is based on, and fairly represents, information and supporting documentation prepared by Mr Andrew Czerw, an employee of Ora Banda Mining Limited, who is a Member of the Australian Institute of Mining and Metallurgy. Mr Czerw has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Czerw consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

The information in this announcement that relates to Mineral Resources and Ore Reserves are set out in the Company's ASX announcement, 'Mineral Resource and Ore Reserve Statement' dated 2 July 2024, which is available to view at www.orabandamining.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in that announcement and that all material assumptions and technical parameters underpinning the estimates in that announcement continue to apply and have not materially changed.

The information in this announcement that relates to prior Riverina and Little Gem exploration results has been extracted from the Company's ASX announcements set out below, which are available to view at www.orabandamining.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in those ASX announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from those ASX announcements. For further information on historical significant intercepts please also refer to the Company's website www.orabandamining.com.au/technical-data.

- 'Strong New Drill Results at Riverina, Waihi & Little Gem' dated 10 June 2025
- 'Outstanding Exploration Results at Little Gem Confirm Greenfields Discovery' dated 13 March 2025 and 'Exploration Results at Little Gem' dated 19 March 2025.
- 'Successful Exploration Drilling at Riverina Paves the Way for Multi-year Mine Life Extension' dated 13 February 2025.
- 'Exploration Update' dated 3 August 2023
- 'First Pass Exploration Success' dated 30 July 2021
- 'Riverina South & Riverina Underground Infill and Extension Drilling Delivers Further Strong Results' dated 8 March 2021.

Forward-looking Statements

This announcement contains forward-looking statements which may be identified by words such as “forecast”, “guidance”, “target”, “outlook”, “estimates”, “believes”, “expects”, “anticipates”, “intends”, “may”, “will”, “would”, “could”, or “should” and other similar words that involve risks and uncertainties. These statements are based on an assessment of present economic and operating conditions, and on a number of assumptions regarding future events and actions that, as at the date of this announcement, are expected to take place.

Such forward-looking statements are provided as a general guide only, are not guarantees of future performance and involve known and unknown risks, uncertainties, assumptions and other important factors, many of which are beyond the control of the Company, the Directors and management of the Company. When forecasting or providing guidance on costs and production the Company has taken into account current operating costs, design, plans for the mine, cost escalation, required personnel numbers and inputs including capital estimates, submitted tender rates from contractors and suppliers, and average industry productivity and mining specification metrics. These and other factors could cause actual results to differ materially from those expressed or implied in any forward-looking statements.

The Company has no intention to update or revise forward-looking statements, or to publish prospective financial information in the future, regardless of whether new information, future events or any other factors affect the information contained in this announcement, except where required by law (including the ASX Listing Rules). The Company cannot and does not give assurances that the results, performance or achievements expressed or implied in the forward-looking statements contained in this announcement will actually occur and investors are cautioned not to place undue reliance on these forward-looking statements.

Appendix 1 – Significant Intersection Table

Little Gem -0.5g/t cut-off, maximum 2m internal dilution, minimum width 0.2m

Project	Hole ID	MGA North	MGA East	RL	Azi	Dip	End Depth	Hole Type	Depth From	Depth To	Interval	Grade	Gram Metres	Au g/t interval
SUNRAYSIA	LGDD25007	6703666	265120	412	266	-51	636	DDH	395.75	396.14	0.39	2.59	1.0	0.4m @ 2.6 g/t
	LGDD25007								456.29	457.35	1.06	0.60	0.6	1.1m @ 0.6 g/t
	LGDD25007								603.00	603.50	0.50	1.30	0.7	0.5m @ 1.3 g/t
	LGDD25007								606.70	607.00	0.30	1.37	0.4	0.3m @ 1.4 g/t
	LGDD25007								610.00	611.58	1.58	1.34	2.1	1.6m @ 1.3 g/t
SUNRAYSIA	LGDD25008	6704440	264955	438	269	-51	300	RCDD	27.00	28.00	1.00	0.81	0.8	1.0m @ 0.8 g/t
	LGDD25008								96.00	99.00	3.00	0.78	2.3	3.0m @ 0.8 g/t
	LGDD25008								299.00	300.00	1.00	0.56	0.6	1.0m @ 0.6 g/t
SUNRAYSIA	LGDD25008A	6704438	264949	415	267	-51	614	RCDD	56.00	57.10	1.10	1.14	1.3	1.1m @ 1.1 g/t
	LGDD25008A								73.50	75.00	1.50	0.90	1.3	1.5m @ 0.9 g/t
	LGDD25008A								77.00	79.45	2.45	0.56	1.4	2.5m @ 0.6 g/t
	LGDD25008A								90.50	92.18	1.68	0.53	0.9	1.7m @ 0.5 g/t
	LGDD25008A								441.05	443.12	2.07	1.66	3.4	2.1m @ 1.7 g/t
	LGDD25008A								448.10	456.00	7.90	1.41	11.2	7.9m @ 1.4 g/t
	LGDD25008A								458.83	467.65	8.82	6.26	55.2	8.8m @ 6.3 g/t
	LGDD25008A								Incl 463.62	464.22	0.60	59.30	35.6	0.6m @ 59.3 g/t
	LGDD25008A								501.75	504.50	2.75	3.67	10.1	2.8m @ 3.7 g/t
	LGDD25008A								Incl 502.07	502.52	0.45	13.00	5.9	0.5m @ 13.0 g/t
	LGDD25008A								517.70	526.00	8.30	1.00	8.3	8.3m @ 1.0 g/t
SUNRAYSIA	LGDD25010	6700455	265417	411	269	-50	643	DDH	182.00	183.00	1.00	2.77	2.8	1.0m @ 2.8 g/t
SUNRAYSIA	LGDD25011	6701256	265162	411	272	-47	301	RCDD	144.98	145.35	0.37	1.73	0.6	0.4m @ 1.7 g/t
	LGDD25011								152.36	153.45	1.09	1.84	2.0	1.1m @ 1.8 g/t
	LGDD25011								165.50	171.00	5.50	0.82	4.5	5.5m @ 0.8 g/t
	LGDD25011								240.94	241.54	0.60	0.84	0.5	0.6m @ 0.8 g/t
	LGDD25011								250.20	250.51	0.31	0.93	0.3	0.3m @ 0.9 g/t
SUNRAYSIA	LGDD25012	6701249	265322	411	268	-50	595	RCDD	315.00	316.00	1.00	0.93	0.9	1.0m @ 0.9 g/t
	LGDD25012								320.12	321.00	0.88	2.37	2.1	0.9m @ 2.4 g/t
	LGDD25012								329.00	332.76	3.76	2.31	8.7	3.8m @ 2.3 g/t
	LGDD25012								Incl 331.68	332.00	0.32	14.10	4.5	0.3m @ 14.1 g/t
	LGDD25012								361.00	362.00	1.00	0.50	0.5	1.0m @ 0.5 g/t
	LGDD25012								388.00	389.00	1.00	1.29	1.3	1.0m @ 1.3 g/t
	LGDD25012								399.00	401.00	2.00	1.17	2.3	2.0m @ 1.2 g/t
	LGDD25012								415.00	416.00	1.00	0.50	0.5	1.0m @ 0.5 g/t
	LGDD25012								421.85	422.25	0.40	1.47	0.6	0.4m @ 1.5 g/t
SUNRAYSIA	LGDD25013	6702873	264988	411	269	-51	408	RCDD	77.00	77.40	0.40	0.89	0.4	0.4m @ 0.9 g/t
	LGDD25013								89.74	91.67	1.93	4.27	8.2	1.9m @ 4.3 g/t
	LGDD25013								Incl 89.74	90.12	0.38	19.35	7.4	0.4m @ 19.4 g/t
	LGDD25013								95.67	96.95	1.28	0.61	0.8	1.3m @ 0.6 g/t
	LGDD25013								250.64	251.09	0.45	0.72	0.3	0.5m @ 0.7 g/t
	LGDD25013								257.00	259.00	2.00	1.71	3.4	2.0m @ 1.7 g/t
	LGDD25013								267.81	268.22	0.41	0.53	0.2	0.4m @ 0.5 g/t
	LGDD25013								280.00	281.57	1.57	0.81	1.3	1.6m @ 0.8 g/t
	LGDD25013								322.23	323.00	0.77	0.63	0.5	0.8m @ 0.6 g/t
SUNRAYSIA	LGDD25014	6702875	265094	409	269	-51	600	RCDD	364.00	365.00	1.00	2.19	2.2	1.0m @ 2.2 g/t
	LGDD25014								107.00	108.00	1.00	0.62	0.6	1.0m @ 0.6 g/t
	LGDD25014								288.23	293.05	4.82	1.10	5.3	4.8m @ 1.1 g/t
	LGDD25014								420.76	421.05	0.29	3.45	1.0	0.3m @ 3.5 g/t
	LGDD25014								427.82	428.82	1.00	2.10	2.1	1.0m @ 2.1 g/t
SUNRAYSIA	LGDD25015	6702054	265054	410	270	-51	401	DDH	466.37	467.00	0.63	0.52	0.3	0.6m @ 0.5 g/t
	LGDD25015								55.00	56.00	1.00	0.54	0.5	1.0m @ 0.5 g/t
	LGDD25015								74.00	75.00	1.00	0.55	0.6	1.0m @ 0.6 g/t
	LGDD25015								78.00	78.50	0.50	1.34	0.7	0.5m @ 1.3 g/t
	LGDD25015								79.50	80.00	0.50	1.02	0.5	0.5m @ 1.0 g/t
SUNRAYSIA	LGDD25015								87.00	88.00	1.00	1.09	1.1	1.0m @ 1.1 g/t

Project	Hole ID	MGA North	MGA East	RL	Azi	Dip	End Depth	Hole Type	Depth From	Depth To	Interval	Grade	Gram Metres	Au g/t interval
SUNRAYSIA	LGDD25016	6702057	265170	410	270	-51	612	RCDD	198.00	199.00	1.00	0.52	0.5	1.0m @ 0.5 g/t
	LGDD25016								218.00	219.00	1.00	1.44	1.4	1.0m @ 1.4 g/t
	LGDD25016								278.00	281.00	3.00	2.64	7.9	3.0m @ 2.6 g/t
	LGDD25016								299.00	300.00	1.00	8.63	8.6	1.0m @ 8.6 g/t
	LGDD25016								346.49	347.39	0.90	6.22	5.6	0.9m @ 6.2 g/t
	LGDD25016								469.00	469.65	0.65	0.70	0.5	0.7m @ 0.7 g/t
	LGDD25016								494.78	495.50	0.72	0.65	0.5	0.7m @ 0.7 g/t
SUNRAYSIA	LGDD25017	6701654	265150	411	266	-50	409	RCDD	90.00	92.00	2.00	0.76	1.5	2.0m @ 0.8 g/t
	LGDD25017								177.00	179.47	2.47	1.77	4.4	2.5m @ 1.8 g/t
	LGDD25017								223.00	229.00	6.00	0.52	3.1	6.0m @ 0.5 g/t
	LGDD25017								243.24	243.55	0.31	0.52	0.2	0.3m @ 0.5 g/t
	LGDD25017								280.00	281.00	1.00	0.60	0.6	1.0m @ 0.6 g/t
SUNRAYSIA	LGDD25018	6700151	265208	410	266	-50	361	RCDD	114.50	115.00	0.50	1.59	0.8	0.5m @ 1.6 g/t
	LGDD25018								197.60	199.15	1.55	1.58	2.4	1.6m @ 1.6 g/t
	LGDD25018								204.40	204.80	0.40	3.26	1.3	0.4m @ 3.3 g/t
	LGDD25018								218.10	219.10	1.00	4.01	4.0	1.0m @ 4.0 g/t
	LGDD25018								222.00	222.50	0.50	0.72	0.4	0.5m @ 0.7 g/t
	LGDD25018								319.25	320.85	1.60	0.52	0.8	1.6m @ 0.5 g/t
SUNRAYSIA	LGDD25019	6700851	265302	411	269	-50	408	RCDD	124.34	127.00	2.66	3.71	9.9	2.7m @ 3.7 g/t
	LGDD25019								133.16	133.67	0.51	1.02	0.5	0.5m @ 1.0 g/t
SUNRAYSIA	LGDD25020	6702461	265077	409	269	-51	416	RCDD	72.70	73.00	0.30	0.57	0.2	0.3m @ 0.6 g/t
	LGDD25020								135.00	135.75	0.75	3.17	2.4	0.8m @ 3.2 g/t
	LGDD25020								145.78	148.00	2.22	2.35	5.2	2.2m @ 2.3 g/t
	LGDD25020								239.00	243.00	4.00	1.29	5.1	4.0m @ 1.3 g/t
	LGDD25020								258.48	259.18	0.70	0.61	0.4	0.7m @ 0.6 g/t
	LGDD25020								265.00	266.37	1.37	0.64	0.9	1.4m @ 0.6 g/t
	LGDD25020								269.27	272.80	3.53	0.73	2.6	3.5m @ 0.7 g/t
	LGDD25020								276.60	280.47	3.87	0.74	2.9	3.9m @ 0.7 g/t
SUNRAYSIA	LGDD25020								403.00	405.00	2.00	0.67	1.3	2.0m @ 0.7 g/t
SUNRAYSIA	LGRC25001	6704448	264710	418	265	-60	250	RC	60.00	62.00	2.00	0.85	1.7	2.0m @ 0.8 g/t
	LGRC25001								118.00	122.00	4.00	1.09	4.4	4.0m @ 1.1 g/t
SUNRAYSIA	LGRC25006	6704077	265053	415	268	-61	264	RC	162.00	164.00	2.00	1.18	2.4	2.0m @ 1.2 g/t
	LGRC25006								173.00	174.00	1.00	1.41	1.4	1.0m @ 1.4 g/t
SUNRAYSIA	LGRC25007	6704862	264888	417	268	-54	252	RC	80.00	84.00	4.00	0.68	2.7	4.0m @ 0.7 g/t
	LGRC25007								99.00	100.00	1.00	5.96	6.0	1.0m @ 6.0 g/t
	LGRC25007								107.00	111.00	4.00	1.53	6.1	4.0m @ 1.5 g/t
	LGRC25007								155.00	156.00	1.00	3.52	3.5	1.0m @ 3.5 g/t
	LGRC25007								168.00	171.00	3.00	0.92	2.8	3.0m @ 0.9 g/t
	LGRC25007								246.00	247.00	1.00	1.01	1.0	1.0m @ 1.0 g/t
SUNRAYSIA	LGRC25008	6703252	265177	434	271	-55	162	RC	118.00	119.00	1.00	0.58	0.6	1.0m @ 0.6 g/t

Appendix 2 - JORC CODE, 2012 EDITION – TABLE 1 REPORT

Section 1 Sampling Techniques and Data - GREATER RIVERINA AREA

Criteria	JORC Code explanation	Commentary
<i>Sampling techniques</i>	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	- Australian Consolidated Minerals Ltd (ACM); Unknown - Aztec Expl Ltd; Unknown - Croesus Mining N.L; All samples were dried, crushed and split to obtain a sample less than 3.5kg, and finely pulverised prior to a 50gm charge being collected for analysis by fire assay. - Monarch Gold Mining Company Ltd; Industry standard work. RC samples collected and sent to certified laboratories for crushing, pulverising and assay by fire assay (RC) and aqua regia (RAB). - Pancontinental Mining Ltd; Samples (>2kg) were crushed to 1mm, 1kg split taken and pulverised to 90% minus 20 mesh from which a 50gm aliquot was taken for assay by aqua regia or fire assay. - Consolidated Gold N.L/DPPL(Davyhurst Project PTY. LTD.); Industry standard work, RAB samples crushed, pulverised and a 50g charge taken for fire assay. 200gm soil samples oven dried, and pulverised, 50g charge taken for aqua regia assay. - Riverina Resources Pty Ltd; Industry standard work. RAB samples taken every metre, composited to 4m using a spear. Samples crushed, pulverised and 50g charge taken for fire assay. RC four metre composite samples were collected using a sample spear. RC and diamond samples crushed, pulverised and 50g charge taken for fire assay and/or 4 acid digest. Any gold anomalous 4m composite samples were re-sampled over 1m intervals using a riffle splitter and also sent to Kalgoorlie Assay Laboratory for gold analysis by 50g fire assay. - Barra Resources Ltd; Industry standard work. The entirety of each hole was sampled. Each RC and RAB hole was initially sampled by 4m composites using a spear or scoop. To obtain a representative sample, the entire 1m sample was split using a riffle splitter into a calico bag. Whole diamond core samples for ore zones were sampled. Entire samples were pulverised before splitting and a 50g charge taken for fire assay. - Greater Pacific Gold; Core sampling method unknown, assumed to be cut half core. RC sampling method unknown. Analysis method unknown. However, work completed by accredited laboratories, Analabs and Genalysis. - Carpentaria Exploration Company Pty Ltd; Samples were collected over 1m intervals. 1m, 2m and 4m composite samples taken depending on the rock type. Composite samples were collected using a sample spear. About 2kg samples were despatched for analysis. Samples crushed, pulverised and a 50g charge taken for fire assay. - Malanti Pty Ltd; Industry standard work. 1m samples were collected via a cyclone and passed through a triple splitter giving a 12.5% split of about 2kg. A trowel was used to scoop the samples for composites over 4m and 6m intervals. Samples for assay were then taken with composite intervals based on geology. Many of the single splits were selected for assay in the first instance. Samples packed in poly weave bags were freighted for analysis. Sample crushed, pulverised and a 50g charge taken for fire assay. - Riverina Gold Mines NL; Industry standard work, Composited RAB and 1m RC samples assayed by laboratory. Samples crushed, pulverised and a 50g charge taken for aqua regia analysis. - Riverina Gold NL; RAB samples were bulked at 2m intervals. RC holes were sampled at 1m intervals. Diamond core samples were taken at geological boundaries, sample method unknown. All samples crushed, pulverised and a charge taken for fire assay (Au) and perchloric acid digest/AAS for other elements. - Norgold Ltd.; Unknown

Criteria	JORC Code explanation	Commentary
		- WMC; Unknown - Electrolytic Zinc Company (EZNCO); RAB samples collected by "tubing" bagged 2m sample intervals to give ~ 5kg from a 6-8m composite interval. - Nickel Australia; RAB samples were laid out in 1m piles and sampled as 2m composites in ultramafics, 4m composites elsewhere via a scoop. RC samples were laid out in 1m piles and sampled in 2m composites within ultramafics, 1m samples at the ultramafic basal contact and in 4m composites throughout the rest of the hole via a scoop. - Ora Banda Mining Limited (OBM) - 1m RC samples using face sampling hammer with samples collected under cone splitter. 4m composite RC samples collected using a PVC spear from the sample piles at the drill site. For drilling up to April 2020, RC samples were dispatched for pulverising and 50g charge Fire Assay. For drillholes RVRC20036 to RVRC20104 inclusive, 1m and 4m composite samples were dispatched to the lab, crushed to a nominal 3mm, split to 500 grams and analysed by Photon Assay method at MinAnalytical in Kalgoorlie. 4m composite samples with gold values greater than 0.2 g/t Au were re-sampled as 1m split samples and submitted to the lab for Photon Assay analysis. Half-core samples, cut by automated core saw. Core sample intervals selected by geologist and defined by geological boundaries. Samples are crushed, pulverized and a 40g charge is analysed by Fire Assay. For all surface resource and exploration drilling since 2022, - 1m RC samples using face sampling hammer with samples collected under cone splitter. 4m composite RC samples were taken outside of mineralised zone, collected using a scoop from the sample piles at the drill site. 1m cone split samples were taken within the expected mineralised zones. Core sample intervals selected by geologist and defined by geological boundaries. All samples were dispatched to the SGS laboratory at the Davyhurst site for pulverising. Prepared samples were then despatched to SGS laboratories in Kalgoorlie for a 50g charge Fire Assay. From 7 March 2025 samples were analysed by 500g photon analysis by SGS. Underground diamond drilling - Core sample intervals selected by geologist and defined by geological boundaries. Samples are generally sawn half core but some intervals are whole core. All samples were dispatched to the SGS laboratory at the Davyhurst site for pulverising. Prepared samples were then despatched to SGS laboratories in Kalgoorlie for a 50g charge Fire Assay. From 10 March 2025 samples were analysed by 500g photon analysis by SGS. Underground face sample (rock chips by hammer) intervals selected by geologist and defined by geological boundaries. All samples were dispatched to the SGS laboratory at the Davyhurst site for pulverising. Prepared samples were then despatched to SGS laboratories in Kalgoorlie for a 50g charge Fire Assay.
<i>Drilling techniques</i>	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	- Australian Consolidated Minerals Ltd (ACM); RAB drilling, details unknown. - Aztec Expl Ltd; RC and diamond drilling, details unknown. - Croesus Mining N.L.; Auger samples were drilled by Prodrill Pty Ltd using Toyota mounted auger rig. RAB holes were drilled by either Kennedy, or Arronika or Challenge Drilling of Kalgoorlie. Challenge drilling employed a custom built RAB/AC rig. RC holes were drilled by Ausdrill Pty Ltd and diamond holes were drilled by Sandersons. Core was oriented. - Monarch Gold Mining Company Ltd; Aircore and RAB holes were drilled by Challenge Drilling. All RC holes were drilled by Kennedy Drilling Contractors with 5^{1/2}" hammer. - Pancontinental Mining Ltd; Drilling was undertaken by Davies Drilling of Kalgoorlie using a Schramm T64 rig. - Consolidated Gold N.L./DPPL; Auger samples were collected using a power auger fitted to a 4WD vehicle. RAB drilling was undertaken by Bostech Drilling Pty Ltd. - Riverina Resources Pty Ltd; RC holes drilled with 5^{1/4}" hammer. Unknown diamond core diameter. - Barra Resources Ltd; Holes were drilled by Resource Drilling Pty Ltd using a Schramm 450 drill rig. - Greater Pacific Gold; Schramm RC Rig with face sampling hammer, 5^{1/8}" diameter. NQ core, Edson Rig - Carpentaria Exploration Company Pty Ltd; RC drilling by Robinson contractors. Face sampling hammer used.

Criteria	JORC Code explanation	Commentary
		- Malanti Pty Ltd; Holes were drilled by Redmond Drilling of Kalgoorlie using a truck mounted Schramm rig with a compressor rated at 900 cfm 350 psi. - Riverina Gold Mines NL; Vacuum holes were drilled by G & B Drilling using a Toyota Landcruiser mounted Edsom vacuum rig fitted with a 2 inch (5.08cm) diameter blade. RAB holes were drilled by PJ and RM Kennedy using a Hydro RAB 50 drill rig mounted on a 4 wheel Hino truck with 600 cfm/200 PSI air capacity. A 51/4 inch hammer and blade were used. RC holes were drilled by either Civil Resources Ltd using an Ingersoll Rand T4W heavy duty percussion rig fitted with a 900 cfm at 350 PSI air compressor and a 51/4 inch (13,34cm diameter) RC hollow hammer or by Swick Drilling using an Ingersoll Rand TH 60 reverse circulation drill rig with 750 cfm/350 PSI air capacity and a 51/4 inch RC hollow hammer or by B. Stockwell of Murray Black's Spec Mining Services using a rig mounted on an 8 x 4 Mercedes. - Riverina Gold NL; RC hole were drilled by Green Drilling using Schramm T66 rig. Diamond holes were drilled by Longyear. Diamond holes were sometimes drilled with a RC pre-collar, HQ core and a NQ2 core drilled. - Norgold Ltd.; RAB and RC drilling. - WMC; RC Drilling, details unknown - Electrolytic Zinc Company (EZNCO); RAB drilling by Grimwood Drilling. - Nickel Australia; AC holes drilled by Challenge Drilling, RC by Ausdrill - OBM – 5.25 to 5.5 inch diameter RC holes using face sampling hammer with samples collected under cone splitter. HQ and HQ3 coring to approx. 40m, then NQ2 to BOH. Metallurgical and geotechnical core holes drilled using HQ3 exclusively. All core oriented by reflex instrument. All core drilled from 2022 was orientated by Axis instrument. Underground diamond drilling – NQ2 coring with standard tubing (triple tubing for geotechnical), all core is oriented by Axis Champ Ori tool, rig alignment via DeviAligner tool, downhole surveys via DeviGyro-Ox tool.
<i>Drill sample recovery</i>	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	- Auger, RAB and RC drill recoveries were not recoded by Aztec Expl Ltd. Croesus Mining N.L, Monarch Gold Mining Company Ltd, Pancontinental Mining Ltd, Consolidated Gold N.L/DPPL, Riverina Resources Pty Ltd, Barra Resources Ltd, Carpentaria Exploration Company Pty Ltd, Malanti Pty Ltd, Riverina Gold Mines NL, Riverina Gold Mines NL, Electrolytic Zinc Company (EZNCO), WMC, Norgold, ACM, Nickel Australia or Aztec. However, Monarch, in a Riverina resource report state that "Good recoveries for RMRC series RC drilling were observed. Minor water was encountered in 27 of the RMRC series drill holes" - Diamond Core recoveries are very high due to the competent ground. Any core recovery issues are noted on core blocks and logged. - OBM - Diamond drill recoveries are recorded as a percentage calculated from measured core against downhole drilled intervals (core blocks). - There is no known relationship between sample recovery and grade.
<i>Logging</i>	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	- Australian Consolidated Minerals Ltd (ACM); Geology logs noting weathering, lithology, mineralisation, alteration, texture, veining and sulphide. Quantitative; percent sulphide percent qtz vein. - Aztec Expl Ltd; Hand written logs noting lithology, mineralisation, alteration, veining and sulphide. Quantitative; percent sulphide percent qtz vein. - Croesus Mining N.L; RAB drill logs were recorded both on paper and later electronically by a Casiopia datalogger. Diamond core was geologically, geotechnically and magnetic susceptibility logged. Qualitative: alteration, colour, contact, grainsize, joint, matrix, texture, rocktype, mineral, structure, sulphide, percent sulphide, vein type, percent vein, weathering. Quantitative; percent sulphide, percent vein. Diamond core was photographed. - Monarch Gold Mining Company Ltd; Qualitative: lithology, mineralisation code, alteration, vein code, sulphide code. Quantitative; percent mineralisation, alteration intensity, percent vein, percent sulphide.

Criteria	JORC Code explanation	Commentary
		- Pancontinental Mining Ltd; All drill data was recorded on computer forms and the lithological descriptions were produced by Control Data' Bordata program. Qualitative: colour, weathering, minerals, grainsize, rock, structure, alteration. Quantitative: alteration intensity. - Consolidated Gold N.L/DPPL; Holes were logged at 1m intervals using a standard logging sheet directly onto a palmtop logger. Qualitative: colour, weathering, minerals, grainsize, rock, structure, alteration. Quantitative: alteration intensity. - Riverina Resources Pty Ltd; Qualitative: lithology, minerals, oxidation, colour, grain, texture, texture intensity, alteration, sulphide, comments. Quantitative: alteration intensity, percent sulphide, percent quartz veins. - Barra Resources Ltd; Each meter from all RC drill holes was washed, sieved and collected in chip trays and stored at the Barminco First Hit Mine office. These rock chips were geologically logged using the Barminco Pty Ltd geological logging codes. This data was manually recorded on logging sheets or captured digitally using a HP Jornada hand held computer utilising the Micromine Field Marshall program and entered into a digital database at the Barminco First Hit Mine office. Each diamond drill holes was recovered according to the driller's core blocks and metre marked. The core was logged to the centimetre, and samples were marked up accordingly. The core was geologically logged using the Barminco Pty Ltd geological logging codes. This data was manually recorded on logging sheets in the field and entered into a digital database at the Barminco First Hit Mine office. Qualitative: qualifier, lithology, mineralisation, alteration, grain size, texture, colour, oxidation. Quantitative; percentage of quartz and sulphide. Core was photographed. - Greater Pacific Gold; Qualitative logging of lithology, oxidation, alteration and veining. - Carpentaria Exploration Company Pty Ltd; Qualitative: description. Quantitative; percent oxidation, percent quartz, percent pyrite. - Malanti Pty Ltd; Qualitative: description. Quantitative; percent quartz. Logged on a metre basis. - Riverina Gold Mines NL; Qualitative for Vacuum holes: colour, grain size, alteration minerals, rock type, structure, vein type, sulphides, oxidation and comments. Quantitative for Vacuum holes; percent veins, percent sulphides. Qualitative for RAB holes and RC holes from RV110 to RV295: colour, grain size, alteration minerals, rock type, fabric, vein type, sulphides, oxidation and comments. Quantitative RAB holes and RC holes from RV110 to RV295; percent veins, percent sulphides. Qualitative for RC holes from RV296 to RV350: geology, oxidation, colour and description. Quantitative for RC holes from RV296 to RV350; percent quartz. - Riverina Gold NL; Qualitative: RQD, lithology, mineralisation, alteration, weathering, veining, fracturing. Quantitative: percent quartz. - Norgold Ltd.; Not geologically logged. - WMC; Lithology, mineralogy, weathering, quantitative assessment of quartz, and UM mineralogy. - Electrolytic Zinc Company (EZNCO); RAB holes not geologically logged. - Nickel Australia; Hole logged for lithology. - OBM - Field logging was conducted using Geobank MobileTM software on Panasonic Toughbook CF-31 ruggedized laptop computers. Qualitative logging: Lithology, colour, oxidation, grainsize, texture, structure, hardness, regolith. Quantitative: estimates are made of quartz veining, sulphide and alteration percentages. Core photographed both wet and dry. Magnetic susceptibility and RQD were also recorded for core holes. . Underground diamond drilling – Qualitative logging: Lithology, texture, alteration, mineralisation/sulphides, structure, veining. Quantitative: estimates are made of veining, sulphide and alteration percentages, RQD measurements, core density measurements, core recovery per metre, fractures per metre. Core photographed both wet and dry. Underground face sampling domain logging of lithology, veining, alteration, mineralisation/sulphides with each face mapped and photographed

Criteria	JORC Code explanation	Commentary
		All holes were geologically logged in their entirety to a level of detail to support mineral resource estimation.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	- Australian Consolidated Minerals Ltd (ACM); Unknown. - Aztec Expl Ltd; Unknown - Croesus Mining N.L; Auger samples were taken from an average depth of 1.5m to 2m. RAB and Aircore samples were collected in buckets below a free standing cyclone and laid out at 1m intervals in rows of tens adjacent to the drill collar. Composite analytical samples (~3.5kg) were initially collected over 5m intervals for each hole and a 1m bottom of hole analytical sample. Analytical composite samples were formed by taking a representative scoop through each 1m drill sample. RC drill samples were collected in large plastic retention bags below a freestanding cyclone at 1m intervals, with analytical samples initially formed by composite sampling over 5m intervals. Where samples were dry, analytical composites were formed by spear sampling, using a 50mm diameter plastic pipe pushed through the drill cuttings in the sample retention bag to the base of the bag. The pipe is removed carefully with the contents of the pipe containing a representation of the retained metre. Wet RC drill samples where thoroughly mixed in the sample retention bag and 'scoop' sampled to form a 5m composite sample. HQ diamond core was cut into halves and sampled on geological boundaries, to a minimum of 20cm samples or on a metre basis on site. The diamond core was cut using a diamond saw, with half core being submitted to the laboratory for analysis and the other stored. Field samples were taken for RAB, RC and diamond core samples at a rate of 1 in 20. Composite analytical samples returning values greater than 0.1 g/t Au were re-sampled at 1m intervals. - Monarch Gold Mining Company Ltd; Drill hole samples were collected at 4m and 3m composite intervals. All samples at ALS Kalgoorlie were sorted, dried, split via a riffle splitter using the standard splitting procedure laboratory Method Code SPL-21, pulverised in a ring mill using a standard low chrome steel ring set to >85% passing 75 micron. If sample was >3 kg it was split prior to pulverising and the remainder retained or discarded. A 250g representative split sample was taken, the remaining residue sample stored and a 50gm sample charge was taken for analysis. All samples at Ultra Trace Pty Ltd were sorted, dried, a 2.5 – 3kg sample was pulverized using a vibrating disc, was split into a 200-300g subsample and the residue sample stored. A 40grm charge was taken for analysis. Composite samples returning anomalous values were sampled at 1m intervals using a scoop. For both RC and RAB drilling a duplicate sample was collected at every 25th sample, and a standard sample was submitted every 20th sample. - Pancontinental Mining Ltd; RC samples were collected in plastic bags directly from the cyclone at 1m intervals, split twice through a sample splitter before splitting off a 2kg sample for analysis. Samples were crushed to 1mm, 1kg split taken and pulverised to 90% minus 20 mesh from which a 50gm aliquot was taken. Field samples were taken at a rate of 1 in 10 and results show a good correlation with the original values. Samples sent to SGS were dried, jaw and roll crushed, split and pulverised in a chromium steel mill. - Consolidated Gold N.L/DPPL; Auger samples were collected at a nominal depth of 1.5m or blade refusal. Approximately 200gm of material was placed into pre-numbered paper geochemical bags. Sample numbers were entered into a datalogger linked to the GPS unit to ensure accuracy. RAB samples were collected a 1m intervals and used to create a 4m composite sample. Samples were oven dried, pulverised in a single stage grinding bowl until about 90% of the material passed 75 micron. A 50gm split sample was taken for analysis. Composite samples returning values greater than 0.19 Au g/t were sampled at 1m intervals. - Riverina Resources Pty Ltd; Auger soil samples were collected from a depth of 1.8m or blade refusal. RAB and RC 4m composites were taken using a sample spear. Samples were dried, crushed, split, pulverised and a 50gm charge taken. Composite samples returning anomalous gold values were sampled at 1m intervals using a sample spear. - Barra Resources Ltd; Every metre of the drilling was collected through a cyclone into a large green plastic bag and lined up in rows near the hole in rows of 20. The entirety of each hole was sampled. Each hole was initially

Criteria	JORC Code explanation	Commentary
		sampled by 4m composites using a spear or scoop. Once each hole was logged, intervals considered to be geologically significant were re-sampled at 1m intervals. To obtain a representative sample, the entire 1m sample was split using a riffle splitter into a calico bag. Whole diamond core samples for ore zones were sampled. Samples greater than 2.5kg were riffle split to <2.5kg using a Jones riffle splitter. The entire sample was then pulverised in a Labtechnics LM5 to better than 85% passing 75 microns. A 50gm pulp was taken for assaying in appropriately numbered satchels. Composite samples that returned gold assays greater than 0.1 g/t Au and that had not been previously sampled at 1m intervals, were re-sampled at 1m intervals. In addition, any highly anomalous 1m samples were also sampled again to confirm their assay results. • Greater Pacific Gold; Sample preparation for RC and core sample unknown. • Carpentaria Exploration Company Pty Ltd; Samples were collected over 1m intervals. 2m and 4m composite samples were collected using a sample spear. About 2kg samples were despatched for analysis. Samples were dried, crushed, split, pulverised and a charge taken for analysis. • Malanti Pty Ltd; 1m samples were collected in plastic bags via a cyclone and passed through a triple splitter giving a 12.5% split of about 2kg which was placed in a calico bag and marked with the drill hole number and interval sampled. The 87.5% was returned to the similarly numbered large plastic bag and laid in rows on site. A trowel was used to scoop the samples for composites over 4m and 6m intervals. Samples for assay were then taken with composite intervals based on geology. Many of the single splits were selected for assay in the first instance. Samples packed in poly weave bags were freighted for analysis. Samples were dried, crushed, split, pulverised and a 50gm charge taken. RC Samples with anomalous composite assays were split and submitted for analysis. • Riverina Gold Mines NL; Vacuum hole samples were collected every metre and split. RAB samples were taken every metre through a cyclone and riffle split to a quarter and composited to 4m intervals. RC samples were taken every metre through a cyclone after being riffle split to a quarter and some composited to 4m. The residue remained on site in plastic bags whilst the quarter split was sent for analysis. For vacuum holes RVV70 to RVV125, a 30grm was taken. RC samples from holes RV110 to RV164 and vacuum hole samples were dried, crushed to nominal 3mm and a 1,000 grm split was taken for pulverising until 90% passed minus 75 microns. A 25grm charge was taken. RC samples from holes RV230 to RV350 were totally pulverised and a 50 grm charge taken. 4m RAB composite samples returning anomalous values greater than 0.1 g/t Au were sampled at 1m intervals. • Riverina Gold NL; RAB samples were bulked at 2m intervals. RC holes were sampled at 1m intervals. Diamond core samples were taken at geological boundaries. Samples were crushed, split, pulverised and a charge taken for analysis. • Norgold Ltd.; Unknown • WMC; Unknown methods. Analysed for Cr, Mn Fe, Co, Ni, Cu, Zn, As, Au. Also XRD to determine mineralogy %. • Electrolytic Zinc Company (EZNCO); Repeat sampling 5 in every 100 samples. • OBM – RC samples were submitted either as individual 1m samples taken onsite from cone splitter or as 4m composite samples speared from the onsite drill sample piles. Half core samples, cut by saw. Core sample intervals selected by geologist and defined by geological boundaries. For drilling up to April 2020, RC samples were dried, crushed, split, pulverised and a 50gm charge taken. For drillholes RVRC20036 to RVRC20104 inclusive, 1m and 4m composite samples were dispatched to the lab, crushed to a nominal 3mm, split to 500 grams and analysed by Photon Assay method at MinAnalytical in Kalgoorlie. 4m composite samples with gold values greater than 0.2 g/t Au were re-sampled as 1m split samples and submitted to the lab for Photon Assay analysis. For all drilling in 2022, - RC samples were submitted either as individual samples taken from the onsite cone splitter or as four metres composite samples taken by metal scoop. Core sample intervals selected by geologist and defined by geological boundaries, cut by saw and submitted as half core. All samples were dispatched to the SGS laboratory at the Davyhurst site for pulverising. Prepared samples were then despatched to SGS laboratories in Kalgoorlie for a

Criteria	JORC Code explanation	Commentary
		50g charge Fire Assay (GO_FAP50V10). From 10 March 2025 samples were analysed by 500g photon analysis by SGS. Field duplicates, blanks and standards were submitted for QAQC analysis. Underground diamond drilling – Core sample intervals selected by geologist and defined by geological boundaries, selected holes cut by saw and submitted as half core and remainder of holes are whole-core sampled. All samples were dispatched to the SGS laboratory at the Davyhurst site for crushing and pulverising. Prepared samples were then despatched to SGS laboratories in Kalgoorlie for a 50g charge Fire Assay (GO_FAP50V10). Flushes, blanks and standards were submitted for QAQC analysis. Underground face samples as per diamond drilling, including field duplicates, rock chip samples taken via hammer sampling per geology domain. Repeat assays were undertaken on pulp samples at the discretion of the laboratory.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	- Australian Consolidated Minerals Ltd (ACM); Unknown. - Aztec Expl Ltd; Unknown - Croesus Mining N.L; Auger samples were sent to Ultratrace Laboratories, Perth, to be assayed for gold using the Aqua Regia method with a detection limit of 1ppb. RAB, aircore, RC and diamond samples were sent to Ultratrace Laboratories in Perth to be analysed for gold using Fire assay/ICP Optical Spectrometry. Diamond core check samples were analysed at Genalysis of Perth. Some diamond core samples were also analysed for platinum and palladium by fire assay. - Monarch Gold Mining Company Ltd; RC samples were sent to ALS Kalgoorlie to be analysed gold by fire assay (lab code Au-AA26). This was completed using a 50grm sample charge that was fused with a lead concentrate using the laboratory digestion method FA-Fusion and digested and analysed by Atomic Absorption Spectroscopy against matrix matched standard. RC samples were also sent to Ultra Trace Pty Ltd, Canning Vale Western Australia for gold analysis by lead collection fire assay. Samples were also analysed for palladium and platinum. The Quality control at ALS involved 84 pot fire assay system. The number and position of quality control blanks, laboratory standards and repeats were determined by the batch size. Three repeat samples were generally at position 10, 30, 50 of a batch and the control blanks (one blank) at the start of a batch of 84 samples. The laboratory standards were inserted randomly and usually two certified internal standards were analysed with a batch, but it was at the discretion of the 'run builder' as to how many standards to add to the batch and where to place them in the run. QAQC at Ultra Trace Pty Ltd was undertaken for every 27th sample. At random, two repeat samples were chosen, one laboratory standard was inserted and one check sample was taken. The check sample was chosen if the first pass of fire assay shows anomalous value. - Pancontinental Mining Ltd; Samples were sent to Genalysis Laboratory Services Pty Ltd in Perth to be analysed for gold with a detection limit of 0.01 ppm. They were also analysed for gold at SGS laboratory using aqua regia with AAS finish. A number of samples with an assay greater than 0.2 ppm were re-assayed by fire assay. Laboratory standards indicated reasonable accuracy. - Consolidated Gold N.L/DPPL; Auger samples were submitted to ALS Pty Ltd in Perth to be analysed for gold to a detection limit of 0.001ppm using ALS's PM2005 graphite furnace/AAS technique. Samples were also analysed for calcium, magnesium and arsenic using ALS's IC205 technique. RAB samples were submitted to Minilab Pty Ltd Kalgoorlie to be analysed for gold by fire. Some samples were also sent to Amdel Laboratories Ltd Kalgoorlie for gold analysis by fire assay method FAI. - Riverina Resources Pty Ltd; Auger soil samples were sent to Ultra Trace in Perth to be analysed for gold and arsenic using an aqua regia digest and determination by ICP-MS. RC samples were submitted to Kalgoorlie Assay Laboratory for gold analysis by 50gm fire assay. Samples from holes GNRC012 to GNRC020 were also sent Kalgoorlie Assay Laboratory for gold and nickel analysis using a four-acid digest and gold analysis by 50g fire assay. Martin Zone samples were to Kalgoorlie Assay Laboratories to be assayed Ni, Co, Cr, Cu, Mg, Mn, Fe, S, As, Al, Ca, and

Criteria	JORC Code explanation	Commentary
		Zn using a four acid digest with ICP-OES finish and for Au using a 50gm fire assay digest with flame AAS finish. Some samples were also sent to Ultra Trace in Perth for analysis. 312 end of hole RAB samples from the Forehand Prospect were sent to AusSpec International in Sydney for HyChips spectral analysis developed by AusSpec International and CSIRO capable of analyzing dry samples stored in chip trays at a rate of at least 1,600 per day. This was undertaken to identify alteration minerals, weathered clays, Fe oxides, and weathering intensity as well as sample mineralogy including mineral crystallinity and mineral composition. (Results are in appendix 4 of Riverina Project Combined ATR 2006.pdf). Down Hole Electro-Magnetic (DHEM) surveys were conducted in RC drill holes GNRC001, GNRC003 and GNRC004 and three diamond drill holes. These surveys were completed by Outer Rim Exploration Services using a Crone Pulse EM probe. (Southern Geoscience Consultants were contracted to plan the DHEM surveys and interpret the results). • Barra Resources Ltd; Auger samples were sent to Ultra Trace Analytical Laboratories in Perth to be analysed for gold and arsenic. Gold was determined by Aqua Regia with ICP-Mass Spectrometry to a detection limit of 0.2ppb. All RC pulp samples were sent to Kalgoorlie Assay Laboratories or Australian Laboratory Services Pty Ltd (ALS) in Kalgoorlie for gold analysis. Gold analysis was completed using the 50gm fire assay technique with an AAS finish to a detection limit of 0.01ppm. Each was weighed and data captured, with the charge then intimately mixed with flux. Mixed sample and flux were fused in a ceramic crucible at 1100° C in a reducing furnace. Molten mass was then poured into moulds and allowed to cool. Lead button removed and placed in a cupellation furnace. The resultant dore bead was parted and digested, being made up to volume with distilled water. The analyte solution was aspirated against known calibrating standards using AAS. All diamond core sample pulps were sent to Leonora Laverton Assay Laboratory Pty Ltd to be assayed for gold by fire with an AAS finish to a detection limit of 0.01ppm Au. Some drill hole samples were analysed for gold (Fire assay/ICP Optical Spectrometry) by Ultratrace Laboratories in Perth. • Greater Pacific Gold; 1m RC samples submitted to Analabs for Au, Ag, Cu, Pb, Zn, As and Ni analysis. Core samples submitted to Genalysis for Au, Ag, Cu, Pb, Zn, As and Ni analysis. Ore zone samples submitted to Minlab for re-assay. Screen fire assay performed on ore zone pulps. • Carpentaria Exploration Company Pty Ltd; Samples were sent to Australian Assay Laboratories Group in Leonora to be analysed for gold with a detection limit of 0.01 g/t Au by fire assay. Repeat assays undertaken for about 1 sample in 20. Field duplicates and standards routinely submitted with assay batches. • Malanti Pty Ltd; RC samples from RRC1 to RRC7 holes were sent to Aminya Laboratories Pty Ltd, Ballarat, Victoria, to be analysed for gold by fire assay with a detection limit of 0.01 g/t Au. RC samples from holes RRC8 to RRC12 submitted to Minesite Reference Laboratories, Wangara, Western Australia to be analysed for gold by Fire Assay of 50g charge (code FA50) with a 0.01ppm lower detection limit. About 1 in 20 assays was either a repeat or duplicate. • Riverina Gold Mines NL; RC samples from holes RV110 to RV164 and vacuum hole samples were sent to Leonora Laverton Assay Laboratory Pty Ltd, Leonora, to be analysed for gold. The charge was dissolved in aqua-regia/solvent digest with a double ketone backwash and then assayed using AAS techniques with a detection limit of 0.02ppm. RC samples from holes RV230 to RV350, vacuum samples from holes RVW126 to RVW204 and RAB composite samples were sent to Multilab Pty Ltd in Kalgoorlie to be analysed for gold. The 50grm samples were digested in aqua regia and assayed by AAS techniques with a detection limit of 0.01ppm. Other RC samples were sent to Minlab in Perth to be analysed for gold using the aqua regia digest and AAS finish. For vacuum and RAB samples, about 1 in 10 assays was a repeat. For RC holes from RV110 to RV164 and vacuum holes, at least 10 percent of a bulk order was repeated as a laboratory duplicate for quality control. • Riverina Gold NL; RAB samples were analysed for gold, silver, arsenic, lead, zinc, copper and nickel. RC samples were despatched to Genalysis to be analysed for gold by Aqua Regia/ AAS method. Diamond samples were set to Analabs in Kalgoorlie to be analysed for gold by fire with fusion AAA, copper, lead and silver by ASS with perchloric acid digestion and, arsenic by ASS with vapour generation and density using an air pycnometer.

Criteria	JORC Code explanation	Commentary
		- Norgold Ltd.; Unknown - WMC; Unknown. - Electrolytic Zinc Company (EZNCO); Unknown. - Nickel Australia; AC sample Samples were dispatched to Ultra Trace Laboratory in Perth for analysis the standard nickel suite of elements of Au, Pt and Pd by method FA002 (Fire Assay) and Ag, Al, As, Bi, Co, Cr, Cu, Fe, Mg, Mn, Mo, Ni, Pd, S, Ti and Zn via ICP302 (4 acid digest ICP/MS or ICPOES) method. RC samples were dispatched to Ultra Trace Laboratory in Perth and analysed for Ni, Cu Pt+Pd. - OBM – Up to April 2020, all samples were sent to an accredited laboratory (Nagrom Laboratories in Perth, Intertek-Genalysis in Kalgoorlie or SGS in Kalgoorlie). The samples have been analysed by firing a 50gm portion of the sample. This is the classical fire assay process and will give total separation of gold. An ICPOES finish is used. Commercially prepared standard samples and blanks are inserted in the sample stream at a rate of 1:12. Sizing results (percentage of pulverised sample passing a 75µm mesh) are undertaken on approximately 1 in 40 samples. The accuracy (standards) and precision (repeats) of assaying are acceptable. For drillholes RVRC20036 to RVRC20104, 1m and 4m composite RC samples were sent to MinAnalytical Laboratory Services in Kalgoorlie. Sample prep involves drying and a -3mm crush, of which 500 grams is linear split into assay jars for analysis. Samples are analysed by the Photon assay method which utilises gamma radiation to excite the nucleus of the target atoms (gold). The excited nucleus then emits a characteristic photon, which is counted to determine the abundance of gold in the sample. For all drilling in 2022, All samples were sent to the accredited onsite SGS laboratory at Davyhurst for sample preparation. Prepared samples were then despatched to SGS laboratories in Kalgoorlie for a 50g charge Fire Assay (GO_FAP50V10) with MP-AES finish. Commercially prepared standard samples and blanks are inserted in the sample stream at an average rate of 1:25. Sizing results (percentage of pulverised sample passing a 75µm mesh) are undertaken on approximately 1 in 20 samples. The accuracy (standards) and precision (repeats) of assaying are acceptable. Standards and blanks were inserted into the sample stream at a rate of approximately 1:12. Duplicates were submitted at a rate of approximately 1:30. The accuracy (standards) and precision (repeats) of assaying are acceptable. Underground diamond drilling – All samples were sent to the accredited onsite SGS laboratory at Davyhurst for sample preparation. Prepared samples were then despatched to SGS laboratories in Kalgoorlie for a 50g charge Fire Assay (GO_FAP50V10) with MP-AES finish. Commercially prepared standard samples and blanks are inserted in the sample stream at an average rate of 1:20. Sizing results (percentage of pulverised sample passing a 75µm mesh) are undertaken on approximately 1 in 20 samples. The accuracy (standards) and precision (repeats) of assaying are acceptable. The accuracy (standards) and precision (repeats) of assaying are acceptable. Face samples assayed as per diamond core, including a field duplicate per face. - Fire assay is considered a total technique, Aqua Regia is considered partial. The Photon assay method is considered a total technique and is non-destructive.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	- Holes are not deliberately twinned. - OBM - Geological and sample data logged directly into field computer at the drill rig or core yard using Field Marshall or Geobank Mobile. Data is transferred to Perth via email or through a shared server and imported into Geobank SQL database by the database administrator (DBA). Assay files are received in .csv format and loaded directly into the database by the DBA. Hardcopy and/or digital copies of data are kept for reference if necessary.

Criteria	JORC Code explanation	Commentary
		- Monarch Gold Mining Company Ltd; Geological and sample data was logged digitally and .csv or .xls files imported into Datashed SQL database with in-built validation. Samples bags were put into numbered plastic bags and then cable tied. Samples collected daily from site by laboratory. - Data entry, verification and storage protocols for remaining operators is unknown. - No adjustments have been made to assay data.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	- Australian Consolidated Minerals Ltd (ACM); Surveyed north parallel local grid by J.F Mort and Company. - Aztec Expl Ltd; All holes drilled on a True North parallel local grid. - Croesus Mining N.L; All drilling was located using a Trimble/Omnistar DGPS with an accuracy of plus or minus 1m. Down hole surveys were either as planned or taken using electronic multi shot camera. The grid system used is AGD 1984 AMG Zone 51. - Monarch Gold Mining Company Ltd; The collar co-ordinates of aircore and RAB holes and RC holes RMRC001 to RMRC085 were surveyed using GPS. The co-ordinates of holes RMRC086 to RMRC177 were surveyed using the RTKGPS. All surveying was undertaken by staff of Monarch Gold Mining Company Ltd. Down hole surveys were undertaken every 5m by Ausmine using electronic multi-shot (EMS). The grid system used is GDA94 MGA Zone 51. - Pancontinental Mining Ltd; RC drilling at Mulwarrie was surveyed by McGay Surveys. The grid system used is AMG Zone 51. RAB drilling at Riverina South – holes drilled on local Riverina grid and transformed to MGA using 2 point transformation. Holes were not routinely downhole surveyed. - Consolidated Gold N.L/DPPL; Auger holes located on AMG grid. Some RAB holes were drilled on an AMG grid installed by Kingston Surveys Pty Ltd of Kalgoorlie. Each 40m grid peg had an accurate (plus or minus 10 cm) northing, easting and elevation position. Other RAB holes drilled on local grid. Holes located using compass and hip chain from surveyed baselines. The grid system used is AMG Zone 51. RAB holes not down hole surveyed - Riverina Resources Pty Ltd; Collar co-ordinates were surveyed using a DGPS. Collar azimuth and inclination were recorded. Downhole surveys for most GNRC holes was by single shot and on rare occasions by gyro. Diamond holes surveyed by electronic multishot. The grid system used is AGD 1984 AMG Zone 51. - Barra Resources Ltd; Collar co-ordinates for northings, eastings and elevation have been recorded. Collar azimuth and inclination were recorded. Drill hole collar data was collected by the First Hit mine surveyor and down hole data was collected by the drilling company and passed onto the supervising geologist. The grid system used is AGD84 Zone 51. - Greater Pacific Gold; Collars surveyed on Riverina local Mine grid. 2 point grid transformation translates coordinates into MGA91 zone 51. Holes downhole surveyed by gyro (Ace Drilling). - Carpentaria Exploration Company Pty Ltd; A local Riverina South grid was employed to record collar coordinates. Holes were not downhole surveyed. Local co-ordinates were transferred to the AMG and MGA grids using a 2-point transformation. - Malanti Pty Ltd; Collar locations of re-sampled RAB holes were noted using a GPS. Holes were not downhole surveyed. Two grid systems were employed; a local Riverina grid and AGD 1996 AMG Zone 51. Local co-ordinates were transferred to the AMG and MGA grids using a 2-point transformation. - Riverina Gold Mines NL; Collar co-ordinates for northings and eastings and have been recorded. Collar inclination was recorded. The grid used was the Riverina grid which is oriented to true north. The origin for this grid is 10,000N, 10,000E located at the south west corner of surveyed M30/98. - Riverina Gold NL; For diamond holes, down hole surveys were either assumed or taken using an Eastman camera or gyro. Diamond hole locations surveyed on Riverina local grid. RC and RAB holes located on surveyed Riverina local grid.

Criteria	JORC Code explanation	Commentary
		- Norgold Ltd.; Local grid with 10,400 running parallel with northern boundary of tenement P30/178. - Topography has been surveyed by recent operators. Collar elevations are consistent with surrounding holes and the natural surface elevation. - WMC; All drilling on AMG 84 grid. - Electrolytic Zinc Company (EZNCO); Local Grid. - Nickel Australia; RC holes were located via DGPS on gridded pegs on an MGA-zone 51 grid. AC holes were located on gridded pegs which had been located via DGPS in MGA co-ordinates (zone 51). - OBM (RC, DD) MGA94, zone 51. Drill hole collar positions were picked up by a contract surveyor using RTKGPS subsequent to drilling. Drill-hole, downhole surveys are recorded every 30m using a reflex digital downhole camera. Some RC holes not surveyed if holes short and/or drilling an early stage exploration project. Diamond drillholes completed in 2019 and 2020 by OBM were surveyed using a Gyro tool. For all drilling from 2022 Drill hole collar positions were picked up by an OBM mining surveyor using RTKGPS subsequent to drilling. All downhole surveys were taken every 10m by Gyro. Underground diamond drilling – diamond drilling collar locations picked up by mine surveyors via theodolite and known survey control points. UG diamond drill rig alignment via surveyed collar locations and DevAligner tool, downhole surveys via DevGyro-Ox tool. Underground face sample locations measured via laser distometer to known surveyed control points and development surveys via theodolite.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- Exploration results are reported for single holes only. - Australian Consolidated Minerals Ltd (ACM); 15m to 20m along very widely (up to 1km) spaced east-west lines. - Aztec Expl Ltd; Wide spaced first pass RC and Diamond drilling. - Drill hole spacing is adequate for the current resources reported externally. (Examples are discussed below) - Croesus Mining N.L; Auger samples were collected to infill a 250m x 100m grid, Riverina South RAB samples were collected to infill a 400m x 80m grid and Sunraysia RC drilling was completed on a 40m x 200m grid. - Monarch Gold Mining Company Ltd; RAB holes were drilled on 200m x 40m grids and RC holes were drilled on a 20m x 20m and 40m x 20m grids. - Riverina Resources Pty Ltd; Auger soil sampling program was taken over 50m x 50m, 50m x 100m and 50m x 200m spaced grids, Silver Tongue RAB and RC holes were drilled on 25m x 25m, 25m x 50m and 50m x 50m spaced grids and Corporate James RAB holes were drilled on 50m x 100m and 25m x 100m spaced grids. - Norgold Ltd.; Approximately 25m along 100m spaced lines. - Barra Resources Ltd; Auger soil sampling program was taken over 50m x 50m, 50m x 100m and 50m x 200m spaced grids, Silver Tongue RAB and RC holes were drilled on 25m x 25m, 25m x 50m and 50m x 50m spaced grids, Corporate James RAB holes were drilled on 50m x 100m and 25m x 100m spaced grids, Forehand RAB and RC holes were drilled on 50m x 100m, 50m x 50m or 25m x 50m spaced grids and Cactus RC holes were drilled on 10m x 10m, 20m x 20m and 40m x 50m spaced grids. - Ora Banda Mining Ltd – underground diamond drilling – typical spacing for grade control purposes is 20m x 20m. Underground face samples are taken each 3m/4m ore development cut. - Drill intercepts are length weighted, 1.0g/t lower cut-off, not top-cut, maximum 2m internal dilution.
Orientation of data in relation to	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling</i>	- Drilling was oriented at 90° to the strike of mineralisation and inclined at 60°. Examples are discussed below. - Australian Consolidated Minerals Ltd (ACM); RAB drilling oriented east or west, perpendicular to mineralisation and lithology. - Aztec Expl Ltd; All holes drilled grid east or west, perpendicular to mineralisation. - Croesus Mining N.L; Holes were either vertical or inclined at 60° and oriented towards the west.

Criteria	JORC Code explanation	Commentary
geological structure	<i>orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	- Monarch Gold Mining Company Ltd; Holes were inclined at 60° and oriented towards the west. - Consolidated Gold N.L./DPPL; Holes were inclined at 60° and oriented towards either the west or east. - Riverina Resources Pty Ltd; Holes were inclined at 60° and oriented towards either the west or east. - Barra Resources Ltd; Holes were either vertical or inclined at 60° and oriented towards the west. - Greater Pacific Gold; Holes drilled to the east inclined at -58 to -60. Suitable for sub vertical N-S striking mineralisation. - Carpentaria Exploration Company Pty Ltd; Holes were inclined at 60° and oriented towards either the west or east. - Malanti Pty Ltd; Holes were inclined at 60° and oriented towards either the west or east. - Riverina Gold Mines NL; Vacuum holes from RVW1 to RVW69 and from RVW126 to RVW204 were drilled vertically. Vacuum holes from RVW70 to RVW125 were inclined at 60° and oriented either east or west. RAB and RC holes were inclined at 60° and oriented either east or west. - Riverina Gold NL; RC holes were inclined at 60° and oriented either east or west. - Norgold Ltd.; RAB and RC holes drilled grid east, almost perpendicular to lithology and mineralisation. - WMC; 100m drill spacing along lines. -60 towards 270, perpendicular to lithology and regional structures. - Electrolytic Zinc Company (EZNCO); East or west dipping holes, perpendicular to lithology and structures. - Nickel Australia; All AC and RC holes drilled -60 towards the west. Perpendicular to the regional lithology - OBM – RC drilling is predominately inclined at between -50 and -60 degrees towards the west. Drilling inclined to the east is only done when lodes are deemed to be vertical or if local landforms prevent access. Underground diamond drilling – collared from decline cuddies in sub-horizontal and inclined fans cutting across sub-vertical lodes, holes are designed to optimise intersection angles and reduce bias for Main Lode East and West. Some bias is present for the Murchison lodes, given their close proximity to the drill cuddies and this impact is mitigated through detailed wall/backings mapping of Murchison lode intersections in underground workings and future targeted grade control drilling. Little Gem drilling is orientated -50 to west, perpendicular the strike of the mineralisation
Sample security	<i>The measures taken to ensure sample security.</i>	- Unknown for all drilling except for the following; - Barra Resources Ltd. Samples received at the laboratory were logged in ALS Chemex's unique sample tracking system. A barcode was attached to the original sample bag. The label was then scanned and the weight of sample recorded together with information such as date, time, equipment used and operator name. - Monarch; Sample calicos were put into numbered plastic bags and cable tied. Any samples that going to SGS were collected daily by the lab. Samples sent to ALS were placed into sample crates and sent via courier on a weekly basis. - OBM - Samples were bagged, tied and stored in a secure yard on site. Once submitted to the laboratories they are stored in cages within a secure fenced compound. Samples are tracked through the laboratory via their LIMS.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	OBM has reviewed historic digital data and compared it to hardcopy and digital (Wamex) records.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary						
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- All tenure pertaining to this report is listed below: <table border="1"> <thead> <tr> <th>TENEMENT</th><th>HOLDER</th><th>AGREEMENTS</th></tr> </thead> <tbody> <tr> <td>M30/256</td><td>CARNEGIE GOLD PTY LTD.</td><td> Farm-in and JV with Davyston Exploration Pty Ltd for all minerals other than gold and its byproducts (portion of tenement only) Davyston Exploration Pty Ltd holds a consent caveat and a mortgage South32 Ltd holds royalty rights (portion of tenement only) Province Resources Ltd holds royalty rights (portion of tenement only) </td></tr> </tbody> </table> - Carnegie Gold PTY LTD is a wholly owned subsidiary of OBM. - There are no known heritage or native title issues. - There are no known impediments to obtaining a licence to operate in the area.	TENEMENT	HOLDER	AGREEMENTS	M30/256	CARNEGIE GOLD PTY LTD.	Farm-in and JV with Davyston Exploration Pty Ltd for all minerals other than gold and its byproducts (portion of tenement only) Davyston Exploration Pty Ltd holds a consent caveat and a mortgage South32 Ltd holds royalty rights (portion of tenement only) Province Resources Ltd holds royalty rights (portion of tenement only)
TENEMENT	HOLDER	AGREEMENTS						
M30/256	CARNEGIE GOLD PTY LTD.	Farm-in and JV with Davyston Exploration Pty Ltd for all minerals other than gold and its byproducts (portion of tenement only) Davyston Exploration Pty Ltd holds a consent caveat and a mortgage South32 Ltd holds royalty rights (portion of tenement only) Province Resources Ltd holds royalty rights (portion of tenement only)						
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	Drilling, sampling and assay procedures and methods as stated in the database and confirmed from Wamex reports and hard copy records are considered acceptable and to industry standards of the time.						
Geology	Deposit type, geological setting and style of mineralisation.	- The geology of the Riverina South area consists of an interlayered sequence of meta-basalts, meta-sediments and ultramafics, rarely cross-cut by narrow pegmatite dykes. The local stratigraphy strikes roughly N-S with primarily steep east to sub-vertical dips. The area has been affected by greenschist grade metamorphism with many minerals exhibiting strong preferred orientations. All rock units exhibit strain via zones of foliation, with strongly sheared zones more common in ultramafic lithologies. Contemporaneous strike faults and late stage thrust faults have dislocated the stratigraphy and hence, mineralisation. - Gold mineralisation is hosted by quartz-sulphide and quartz-Fe oxide veining primarily in the metabasalts. Metasediments and ultramafics may also contain gold mineralised quartz veining, although much less abundant. Gold mineralisation is also seen in silica-biotite-sulphide and silica-sericite-sulphide alteration zones in the metabasalts. - The geology of Little Gem is entirely consistent of metasediments. Gold mineralisation is associated with calcsilicate alteration. A Carbonate unit is a high grade host						
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the	See Tables of Significant Intercepts.						

Criteria	JORC Code explanation	Commentary
	<i>drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	
Data aggregation methods	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	- Original assays are length weighted. Grades are not top cut. Riverina resource is reported at a Lower cut off of nominally 1.0g/t. Due to the narrow nature of mineralisation a minimum sample length of 0.2m was accepted when calculating intercepts. Maximum 2m internal dilution. Exploration drilling Little Gem is reported at a lower cut off is nominally 0.5g/t. - Metal equivalents not reported.
Relationship between mineralisation widths and intercept lengths	<i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i>	- Intercept widths are down hole lengths. True widths are not reported given the varying orientation of drilling and mineralisation at each deposit/prospect mentioned in the report. - The geometry of the mineralisation at Riverina and Little Gem is approx. N-S and sub vertical. Surface drilling is oriented perpendicular the strike of the mineralisation. UG drilling from drill caddy with hole radiating in fans. Holes testing strike extremities are at lower angles to the ore lode and therefore not true widths, while those perpendicular to the lode can approximate true widths.
Diagrams	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view</i>	See plans and cross-sections.

Criteria	JORC Code explanation	Commentary
	<i>of drill hole collar locations and appropriate sectional views.</i>	
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The location of drill hole intersections is shown on the plans and 2D/3D diagrams and are coloured according to grade to provide context for the highlighted intercepts
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	- Riverina has no known reported metallurgical issues. - Results from previous processing have demonstrated that good gold recovery can be expected from conventional CIL processing methods. - Recent baseline metallurgical test work demonstrated the following gold recoveries: - Oxide – 90% - Transitional – 97% - Fresh – 94.3% - Additional variation test-work remains ongoing.
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	- Further GC drilling at Riverina underground will continue as the access into the mine is deepened. - Further resource definition drilling will be conducted from the surface, when beyond the reach of the underground drills, aimed and continued mineral resource growth and resource conversion. - Ongoing Exploration