



Pantoro
Gold

ASX:PNR

Euroz Hartleys Institutional Investor Site Visit and Conference
March 2026

Important Notes



Nature of Document. This presentation has been prepared and issued by Pantoro Limited (Pantoro or Company) to provide general information about Pantoro.

Summary Information. The information in this document is in summary form and should not be relied upon as a complete and accurate representation of any matters that a reader should consider in evaluating Pantoro. While management has taken every effort to ensure the accuracy of the material in this presentation, Pantoro and its advisers have not verified the accuracy or completeness of the material contained in this presentation.

Not an offer. This presentation and its contents are not an invitation, offer, solicitation or recommendation with respect to the purchase or sale of any securities in Pantoro in any jurisdiction and must not be distributed, transmitted, or viewed by any person in any jurisdiction where the distribution, transmission or viewing of this document would be unlawful under the securities or other laws of that or any other jurisdiction. This presentation is not a prospectus or any other offering document under Australian law (and will not be lodged with the Australian Securities and Investments Commission) or any other law.

Not financial product advice. Neither Pantoro nor any of its related bodies corporate is licensed to provide financial product advice in respect of Pantoro's securities or any other financial products. You should not act and refrain from acting in reliance on this presentation. Nothing contained in this presentation constitutes investment, legal, tax or other advice. This presentation does not take into account the individual investment objectives, financial situation and particular needs of Pantoro shareholders. Before making a decision to invest in Pantoro at any time, you should conduct, with the assistance of your broker or other financial or professional adviser, your own investigation in light of your particular investment needs, objectives and financial circumstances and perform your own analysis of Pantoro before making any investment decision.

Disclaimer. No representation or warranty, express or implied, is made by Pantoro that the material contained in this presentation will be achieved or proved correct. Except for statutory liability which cannot be excluded, each of Pantoro, its directors, officers, employees, advisors and agents expressly disclaims any responsibility for the accuracy, fairness, sufficiency or completeness of the material contained in this presentation and excludes all liability whatsoever (including in negligence) for any loss or damage which may be suffered by any person as a consequence of any information in this presentation or any effort or omission therefrom. Pantoro will not update or keep current the information contained in this presentation or to correct any inaccuracy or omission which may become apparent, or to furnish any person with any further information. Any opinions expressed in the presentation are subject to change without notice.

Unless required by law or regulation (including the ASX Listing Rules), Pantoro and their respective directors, officers, employees, advisers, agents and other intermediaries disclaim any obligation or undertaking to provide any additional or updated information, whether as a result of new information, future events or results or otherwise (including to reflect any change in expectations or assumptions).

Nothing in this presentation will, under any circumstances (including by reason of this presentation remaining available and not being superseded or replaced by any other presentation or publication with respect to Pantoro or the subject matter of this presentation), create an implication that there has been no change in the affairs of Pantoro since the date of this presentation.

Forward Looking Statements and future performance This presentation contains forward looking statements about Pantoro. Often, but not always, forward looking statements can be identified by the use of forward looking words such as "may", "will", "expect", "intend", "plan", "estimate", "anticipate", "continue", and "guidance", or other similar words and may include, without limitation, statements in this presentation regarding intent, belief, expectations, plans, strategies and objectives of management, indications of and guidance on synergies, future earnings or financial position or performance, future acquisitions, anticipated production or construction commencement dates, costs or production outputs for Pantoro (based on, among other things, respective estimates of production for the periods specifically referred to in this presentation), and the future operation of Pantoro. Pantoro does not make any representation or warranty as to the currency, accuracy, reliability or completeness of any forward looking statements contained in this presentation.

To the extent that this presentation contains forward looking information, the forward looking information is subject to a number of risks, including those generally associated with the gold industry and the mining industry more broadly. Any such forward looking statement inherently involves known and unknown risks, uncertainties and other factors that may cause actual results, performance and achievements to be materially greater or less than estimated. These may include, but are not limited to, changes in commodity prices, foreign exchange fluctuations and general economic conditions, increased costs and demand for production inputs, the speculative nature of exploration and project development (including the risks of obtaining necessary licenses and permits and diminishing quantities or grades of reserves), political and social risks, changes to the regulatory framework within which Pantoro operates or may in the future operate, environmental conditions including extreme weather conditions, geological and geotechnical events, and other environmental issues, the recruitment and retention of key personnel, industrial relations issues, litigation and outbreaks of disease or pandemics (including the continuation or escalation of the global COVID-19 pandemic. Any such forward looking statements are based on assumptions, qualifications and contingencies which are subject to change and which may ultimately prove to be materially incorrect, as are statements about market and industry trends, which are based on interpretations of current market conditions. Investors should consider any forward looking statements contained in this presentation in light of such matters (and their inherent uncertainty) and not place reliance on such statements. Forward looking statements are not guarantees or predictions of future performance and may involve significant elements of subjective judgment, assumptions as to future events that may not be correct, known and unknown risks, uncertainties and other factors, many of which are outside the control of Pantoro. Any forward looking statements are based on information available to Pantoro as at the date of this presentation. Except as

Important Notes (Continued)



Past performance. Past performance metrics and figures (including past share price performance of Pantoro), as well as pro forma financial information, included in this presentation are given for illustrative purposes only and should not be relied upon as (and is not) an indication of Pantoro's, or any other party's views on Pantoro's future financial performance or condition or prospects. Investors should also note that the pro forma historical financial information is for illustrative purpose only. Investors should note that past performance of Pantoro, including in relation to the historical trading price of Pantoro shares, production, mineral resources and ore reserves, costs and other historical financial information cannot be relied upon as an indicator of (and provides no guidance, assurance or guarantee as to) future Pantoro performance, including the future trading price of Pantoro shares. The historical information included in this presentation is, or is based on, information that has previously been released to the market.

Exploration Targets, Exploration Results. The information in this report that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Scott Huffadine (B.Sc. (Hons)), a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr Huffadine is a Director and full time employee of the Company. Mr Huffadine is eligible to participate in short and long term incentive plans of and holds shares, options and performance rights in the Company as has been previously disclosed. Mr Huffadine has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Huffadine consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

ASX Listing Rule 5.23 Mineral Resources & Ore Reserves. This presentation contains estimates of Pantoro's ore reserves and mineral resources, as well as estimates of the Norseman Gold Project's ore reserves and mineral resources. The information in this presentation that relates to the ore reserves and mineral resources of Pantoro has been extracted from a report entitled 'Annual Mineral Resource & Ore Reserve Statement' announced on 22 September 2025 and is available to view on the Company's website (www.pantoro.com.au) and www.asx.com (Pantoro Announcement).

For the purposes of ASX Listing Rule 5.23, Pantoro confirms that it is not aware of any new information or data that materially affects the information included in the Pantoro Announcement and, in relation to the estimates of Pantoro's ore reserves and mineral resources, that all material assumptions and technical parameters underpinning the estimates in the Pantoro Announcement continue to apply and have not materially changed. Pantoro confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from that announcement.

ASX Listing Rule 5.19 Production Targets. The information in this presentation that relates to production targets of Pantoro has been extracted from reports entitled 'DFS for the Norseman Gold Project', 'Underground Development to Commence at Scotia' announced on 17 January 2024, 'Annual Mineral Resource & Ore Reserve Statement' announced on 22 September 2025 and 'Quarterly Activities/Appendix 5B Cash Flow Report' announced on 22 January 2026 and 'December 25 Half Year Report and FY 26 Guidance Update' announced on 9 March 2026 and are available to view on the Company's website (www.pantoro.com.au) and www.asx.com (Pantoro Production Announcements).

For the purposes of ASX Listing Rule 5.19, Pantoro confirms that all material assumptions underpinning the production target, or the forecast financial information derived from the production target, in the Pantoro Production Announcements continue to apply and have not materially changed.

JORC Code. It is a requirement of the ASX Listing Rules that the reporting of ore reserves and mineral resources in Australia comply with the Joint Ore Reserves Committee's Australasian Code for Reporting of Mineral Resources and Ore Reserves ("JORC Code"). Investors outside Australia should note that while ore reserve and mineral resource estimates of the Company in this document comply with the JORC Code (such JORC Code-compliant ore reserves and mineral resources being "Ore Reserves" and "Mineral Resources" respectively), they may not comply with the relevant guidelines in other countries and, in particular, do not comply with (i) National Instrument 43-101 (Standards of Disclosure for Mineral Projects) of the Canadian Securities Administrators (the "Canadian NI 43-101 Standards"); or (ii) Item 1300 of Regulation S-K, which governs disclosures of mineral reserves in registration statements filed with the SEC. Information contained in this document describing mineral deposits may not be comparable to similar information made public by companies subject to the reporting and disclosure requirements of Canadian or US securities laws.

Previously reported drill results – The information is extracted from the reports entitled 'Mainfield Returns Numerous High Grade Results' created on 31 July 2021, 'High Grade Extensions at OK Underground Mine' created on 30 July 2025, 'Mainfield Underground Drilling Returns High Grade Results' created on 13 October 2025, 'Quarterly Activities/Appendix 5B Cash Flow Report' created on 27 October 2025 and 'Continued High Grade Results from Mainfield Drilling' created on 25 November 2025 and are available to view on Pantoro's website (www.pantoro.com.au) and the ASX (www.asx.com.au). The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements.



Norseman GROWTH activities accelerating



Resource & Reserves

Large, High-Grade Mineral Resource

43.2 Mt @
3.3 g/t for
4.6 million
ounces gold



Growing Gold Production Position

New, fully operational gold mining operation

Processing plant operating **above nameplate capacity** at 1.2 million tpa and readily expandable.

High grade OK Underground Mine **continuing to expand** through ongoing drill programs.

Scotia Underground Mine **in production** and continuing to **ramp up**.

Open pits **operational** at Gladstone.

Production from **Bullen Mine** to commence in the Mainfield.

Positioned For Growth

One Of WA's Highest-Grade Goldfields

Large Pipeline of Ore Sources

Growth strategy aims to add **high grade mill feed** to expand to +200Kozpa in medium term.

Programme **underway** and **ramping up** in FY26.



Notes:

1. Refer to page 3 for cautionary statements regarding production targets.
2. Refer last page for full details of Mineral Resource & Ore Reserve.

Strong, Experienced Team



BOARD

Paul Cmrlec
Managing Director

- Mining Engineering background with >25 years experience
- Extensive experience in feasibility, project development, operations and corporate management

Wayne Zekulich
Chair

- Financial management, banking and accounting background
- Extensive public company experience at CFO and director level

Stuart Mathews
Independent
Non-executive
Director

- Previously the Executive Vice President – Australasia and VP Operations for Gold Fields Limited. Instrumental in setting the strategy pathway, operational improvement, and significant growth of Life of Mine for the St. Ives operation, approximately 100 km north of Norseman.

Fiona Van Maanen
Independent
Non-executive
Director

- CPA and holds a Bachelor of Business (Accounting)
- >30 years experience in corporate governance, financial management, and accounting in the mining industry

Mark Maloney
Non-executive
Director

- Managing Partner of Tulla Resources, previously CEO of The MAC Services.
- >15 years experience in investment markets.
- Bachelor of Business (Hons).

SENIOR MANAGEMENT

Scott Huffadine
Chief Operating
Officer

- Geologist with strong operational and project development background and >30 years experience.
- Extensive site general management and corporate experience.

Scott Balloch
Chief Financial
Officer

- Highly experienced CFO and financial controller with > 25 years experience with ASX listed mining companies.

David Okeby
Company Secretary

- More than 20 years working in mining companies and experienced in all areas of company legal and secretarial matters.

Paul Androvic
General Manager -
Norseman

- Geologist with strong operational and project development background and >30 years experience.
- Extensive geological and site management experience.

H1 FY 2026 Key Metrics



41,623 oz
Production



AISC
\$2,809/oz



Reduces with
increased production

EBITDA
\$135.5M



\$85M
Half year
gross profit

\$56M*
Half year
NPAT

* While a tax expense of \$25M was recognised, no tax is payable due to off set against carry forward losses.

\$216.5M
Cash and Gold
at end of half

Our key focus:

- ✓ Maintain industry leading margins and profitability.
- ✓ Responsibly deploying capital to secure long-term growth in Mineral Resources, Ore Reserves and production.
- ✓ Developing additional underground mines to increase mill head grade and gold production.

100% ownership of a gold province

WORLD-CLASS GREENSTONE BELT

Pantoro Gold's tenure is situated in the southern end of the most gold-endowed Greenstone Belt of the Yilgarn Craton. **The Norseman-Wiluna Greenstone Belt has seen >195Moz² Au produced to date.**

HIGHLY PROSPECTIVE




The area south of Kambalda is highly prospective, with **6Moz Au** produced from Norseman tenure to date. **Much of the region is covered by lakes with minimal exploration**

SIGNIFICANT EXPLORATION UPSIDE

Pantoro Gold's Norseman tenure is a significant proportion of the **highly prospective region**, including Lake Cowan which has had **minimal modern exploration**


MAJOR WA GOLD DEPOSITS¹

- 30-50 (t)
- 50-100 (t)
- 100-500 (t)
- 500-1000 (t)
- 1000-3000 (t)

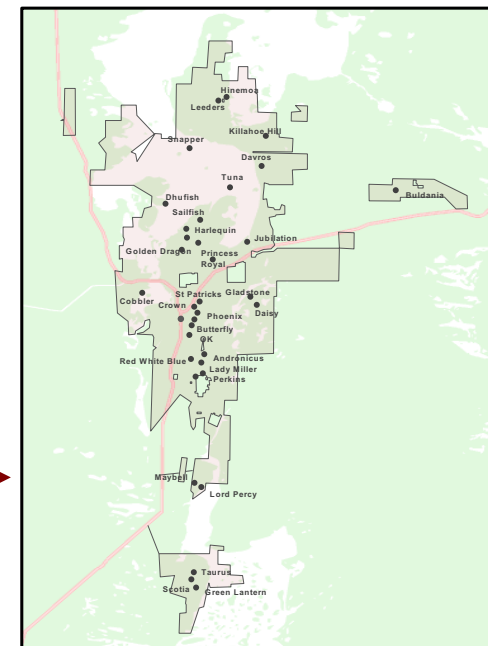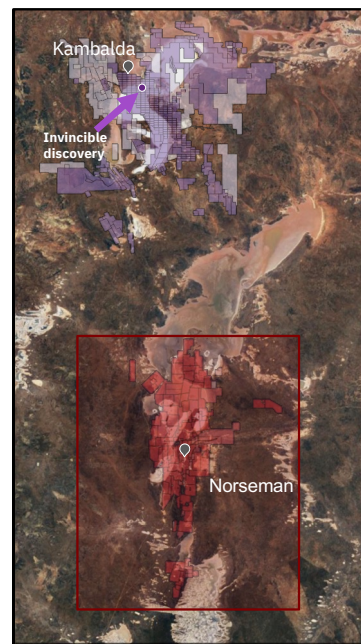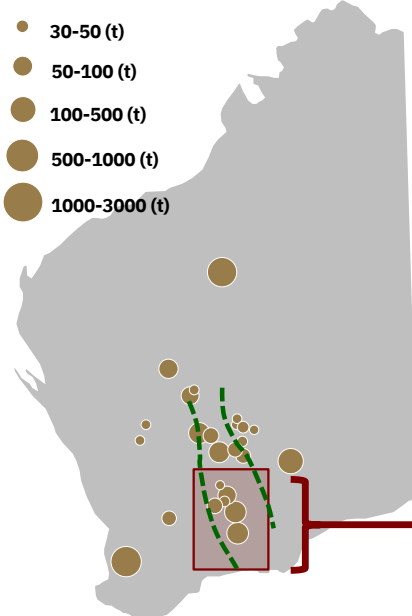

1. Adapted from Rush Australia's 21st Century Gold Industry (2016)
2. WA Department of Mines, Industry Regulation and Safety 2019 Major Commodities Resources Data. Cumulative Gold Production from the following mineral fields: Broad Arrow, Coolgardie, Dundas, East Coolgardie, East Murchison, Mt Margaret, North Coolgardie, North East Coolgardie.

Norseman Growth Strategy

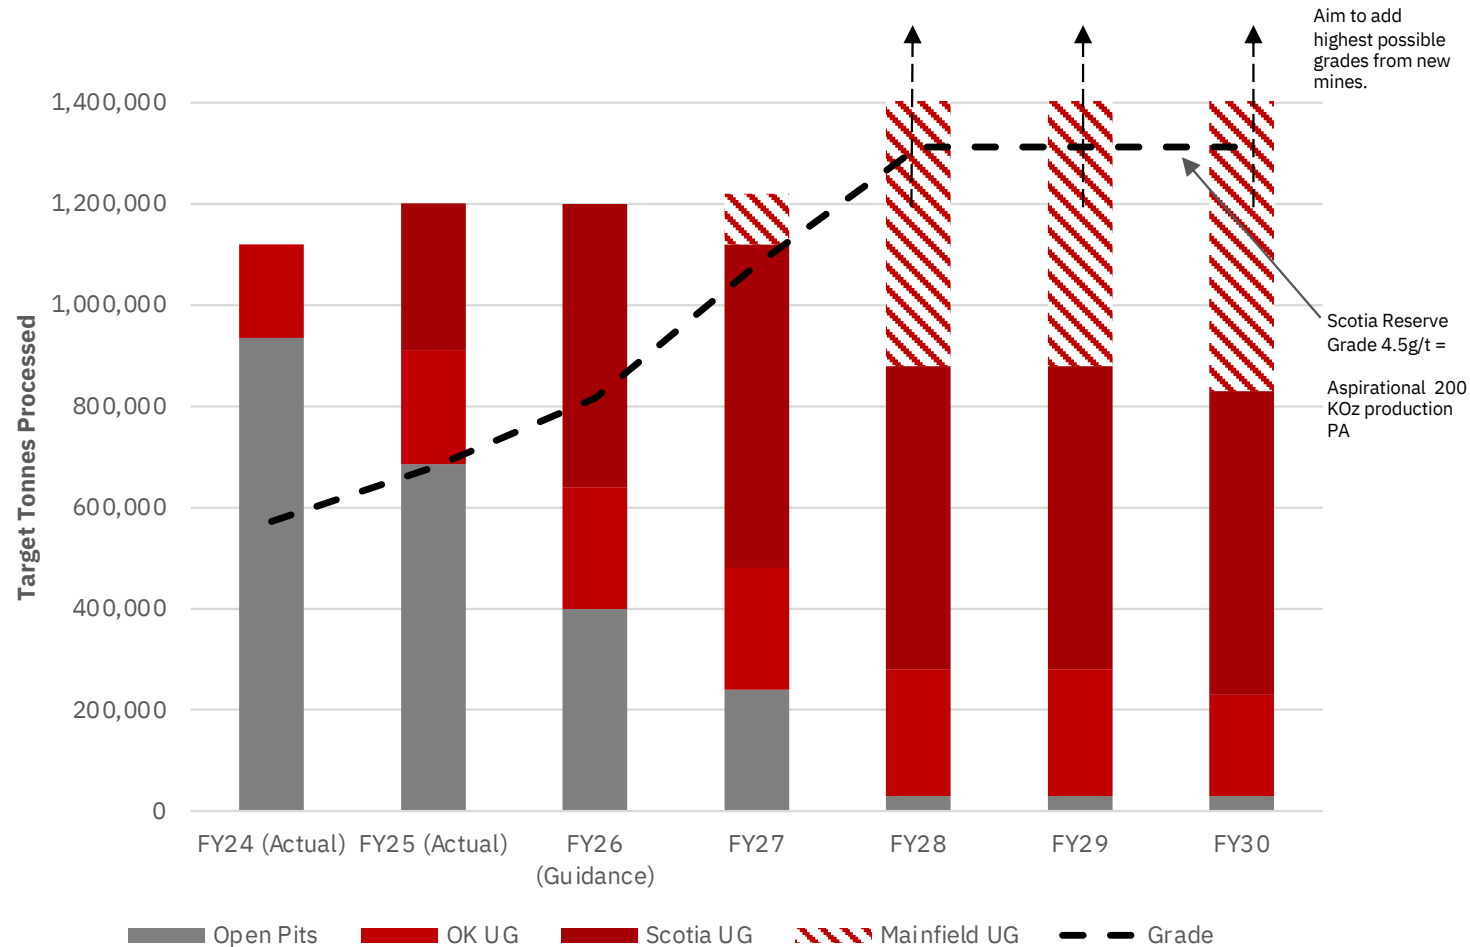

Strategy to replace open pit feed with higher grade underground ore.

Growth drilling underway on surface at Mainfield and underground at Scotia.

Announced Decision to commence mining in O'Briens Lode in Mainfield.

Multiple additional lodes to bring on-line in Mainfield.

Drilling for underground positions at Princess Royal underway.

Updated long term plan due July/August 2026.


Norseman Gold Project Overview



800 km²
tenure
position

70 km along
strike of one
of **Australia's**
most
significant
goldfields.

Historical
production of
approximately
6 million
ounces.

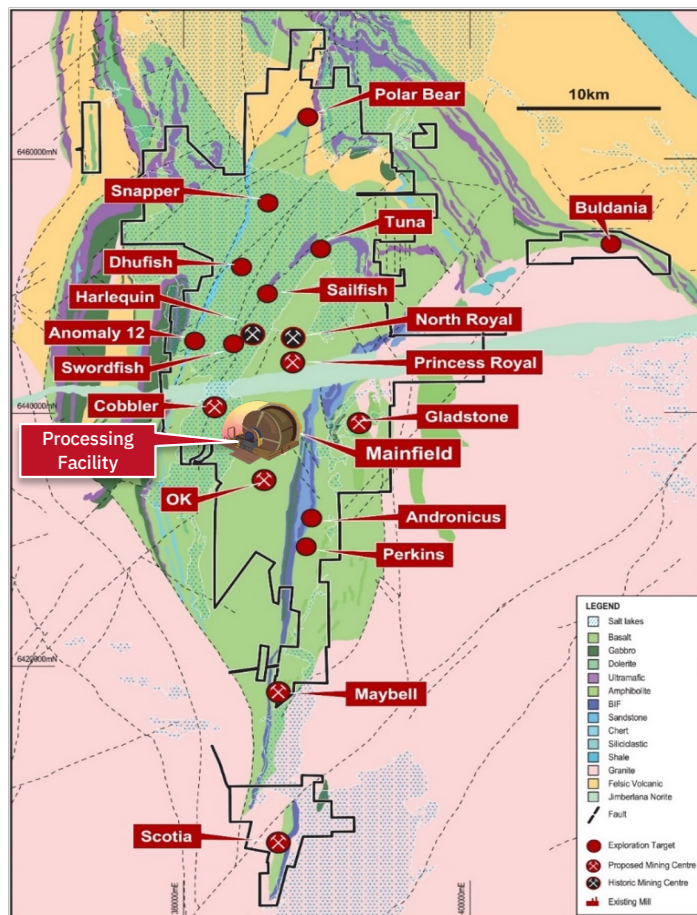

First systematic exploration in three decades

Exploration drilling from surface and underground re-commenced in September 2024 – **yielding high-grade results.**

Less than 30% of known Mineral Resource areas drilled for Ore Reserve conversion to date.

Major campaign in Mainfield with **first new decline planned** for mid-2026.

New regional exploration program in greenfield areas in FY2026.

Processing - Excellent Recovery and Reliability



Norseman processing plant currently operating at 1.2Mt per annum

- Comfortably running at 1.2MTPA with further increases up to 1.4 – 1.5 MTPA easily achieved WITHOUT any major upgrade costs.
- **Upgrades are underway.**
- Excellent recovery: 95% in FY2025.
- Targeting growth through addition of high-grade underground ounces.


1.2 MTPA Processing Rate			
Grade (g/t)	Oz (mill feed)	Recovery	Oz (recovered)
2.5	96,452	95%	91630
3	115,743	95%	109956
3.5	135,033	95%	128281
4	154,324	95%	146607
4.5	173,614	95%	164933
5	192,904	95%	183259
6	231,485	95%	219911
7	270,066	95%	256563
8	308,647	95%	293215

← FY26 target

1.4 MTPA Processing Rate			
Grade (g/t)	Oz (mill feed)	Recovery	Oz (recovered)
2.5	112,528	95%	106901
3	135,033	95%	128281
3.5	157,539	95%	149662
4	180,044	95%	171042
4.5	202,550	95%	192422
5	225,055	95%	213802
6	270,066	95%	256563
7	315,077	95%	299323
8	360,088	95%	342084

← Scotia Ore Reserve grade

OK Underground Mine

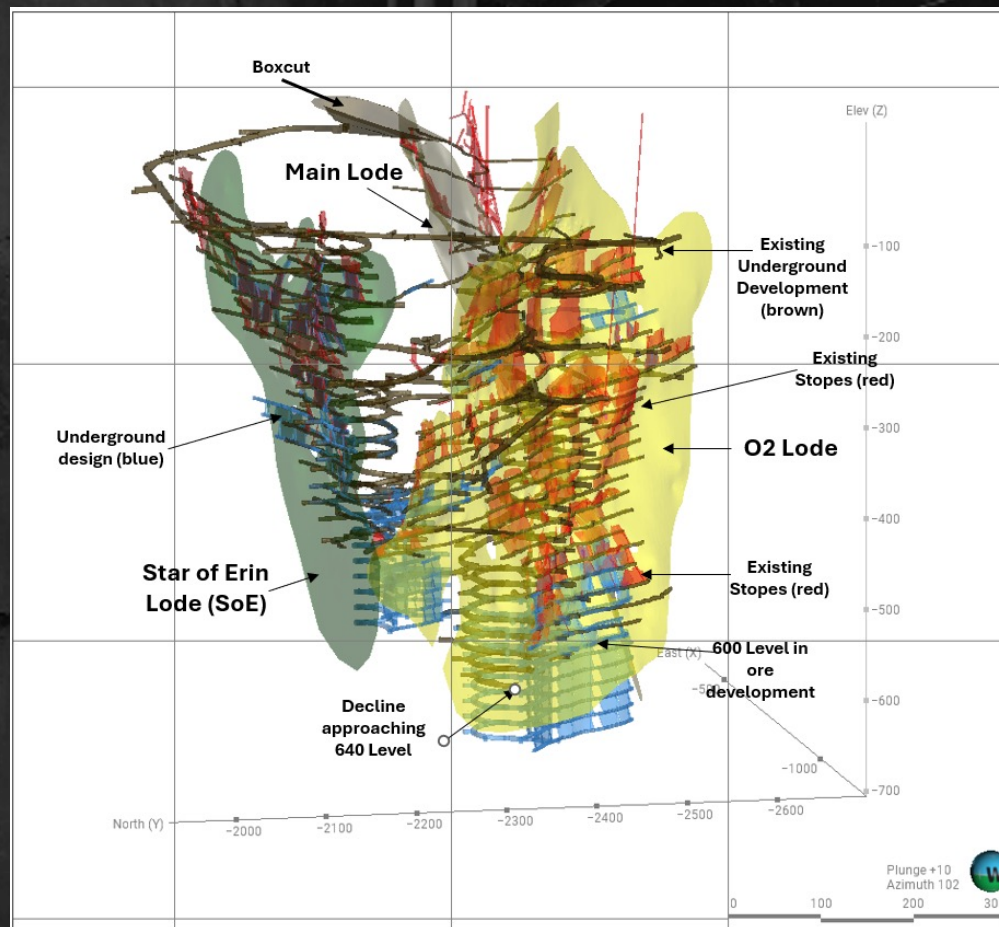

Ore Reserve has increased every year since mining commenced, despite ongoing depletion

Producing in steady state at **circa 35,000 - 40,000 Oz per annum**.

FY 2025 **mined grade 5.83g/t**


Large **extensional exploration drilling** program underway and set to continue for all of FY2026 and FY 2027.

Drilling extensions in both the Star of Erin and O2 lodes for the foreseeable future.

Commenced development of Main Lode in lower levels.


Contract to transition to Redpath under whole of operation agreement on 1 May 2026. Brings numerous synergies across the operation.

SCOTIA UNDERGROUND MINE

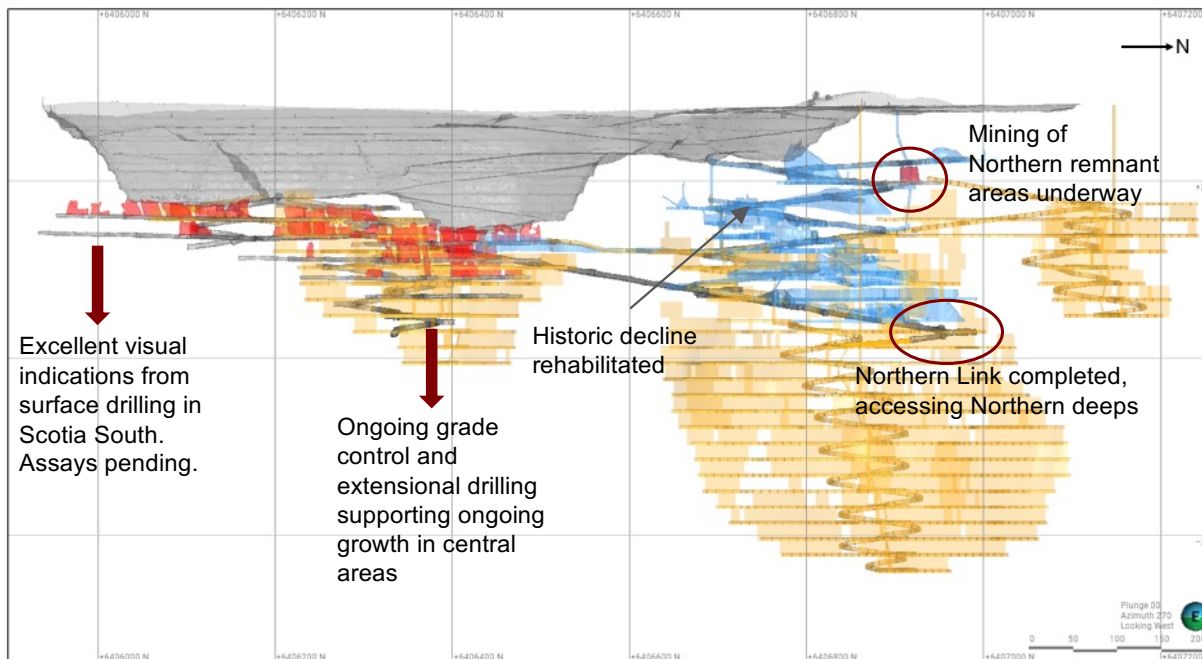


- Scotia is a large system with current mine workings extending over more than 1km of strike. Open to the North and strong potential for underground development at Green Lantern which hosts another 1.5km of strike.
- Development has now linked the North and South areas of the mine with two accesses resulting from rehabilitation of the historic northern decline.
- Multiple additional production areas will provide excellent flexibility and production growth in the second half of the year.
- Scotia is producing expected grades. The first half of the quarter was impacted by lower grade blocks mined due to scheduling requirements while additional production levels were brought on-line.

Gladstone Open Pit – Mining is Underway

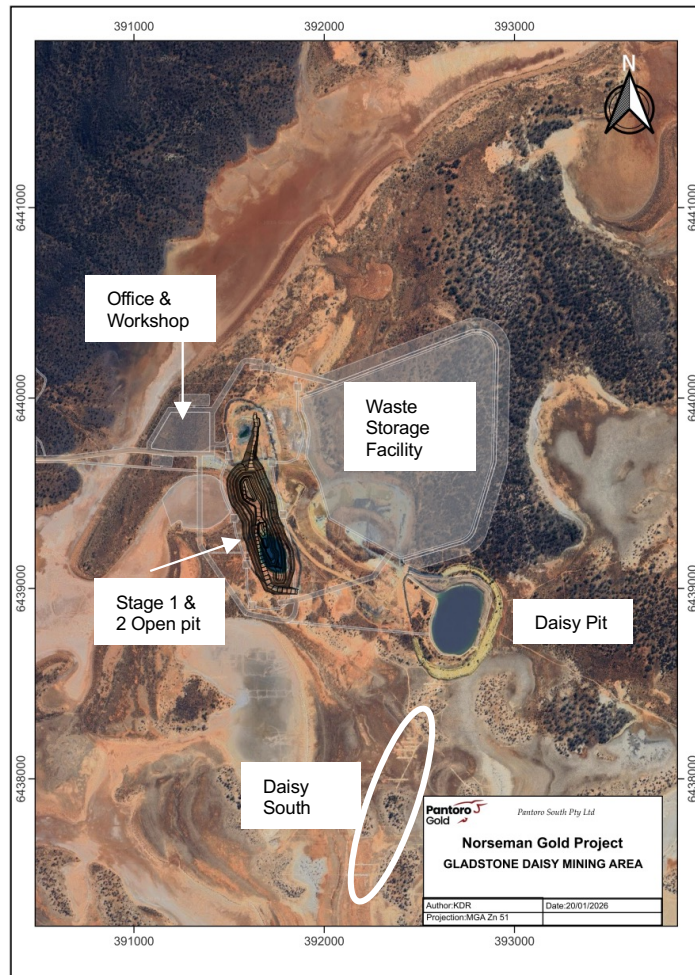


- Gladstone lies approximately 8 km East of the Norseman processing plant.
- 3.8M BCM to be excavated during stages 1 and 2 of open pit mining.
- 317,000 tonnes @ 2.8 g/t Au for 28,500 oz to be mined to March 2027. Mining timeline will be extended if Daisy South is also brought on-line during the period.
- Contributing to production from the end of the March 2026 quarter.
- Third stage under consideration with additional infill drilling being undertaken prior to committing to mining stage 3.
- Daisy South Mineral Resource and Ore Reserve work underway. Expect to mine in conjunction with Gladstone.

Gladstone Open Pit – Stage 3 Grade Control

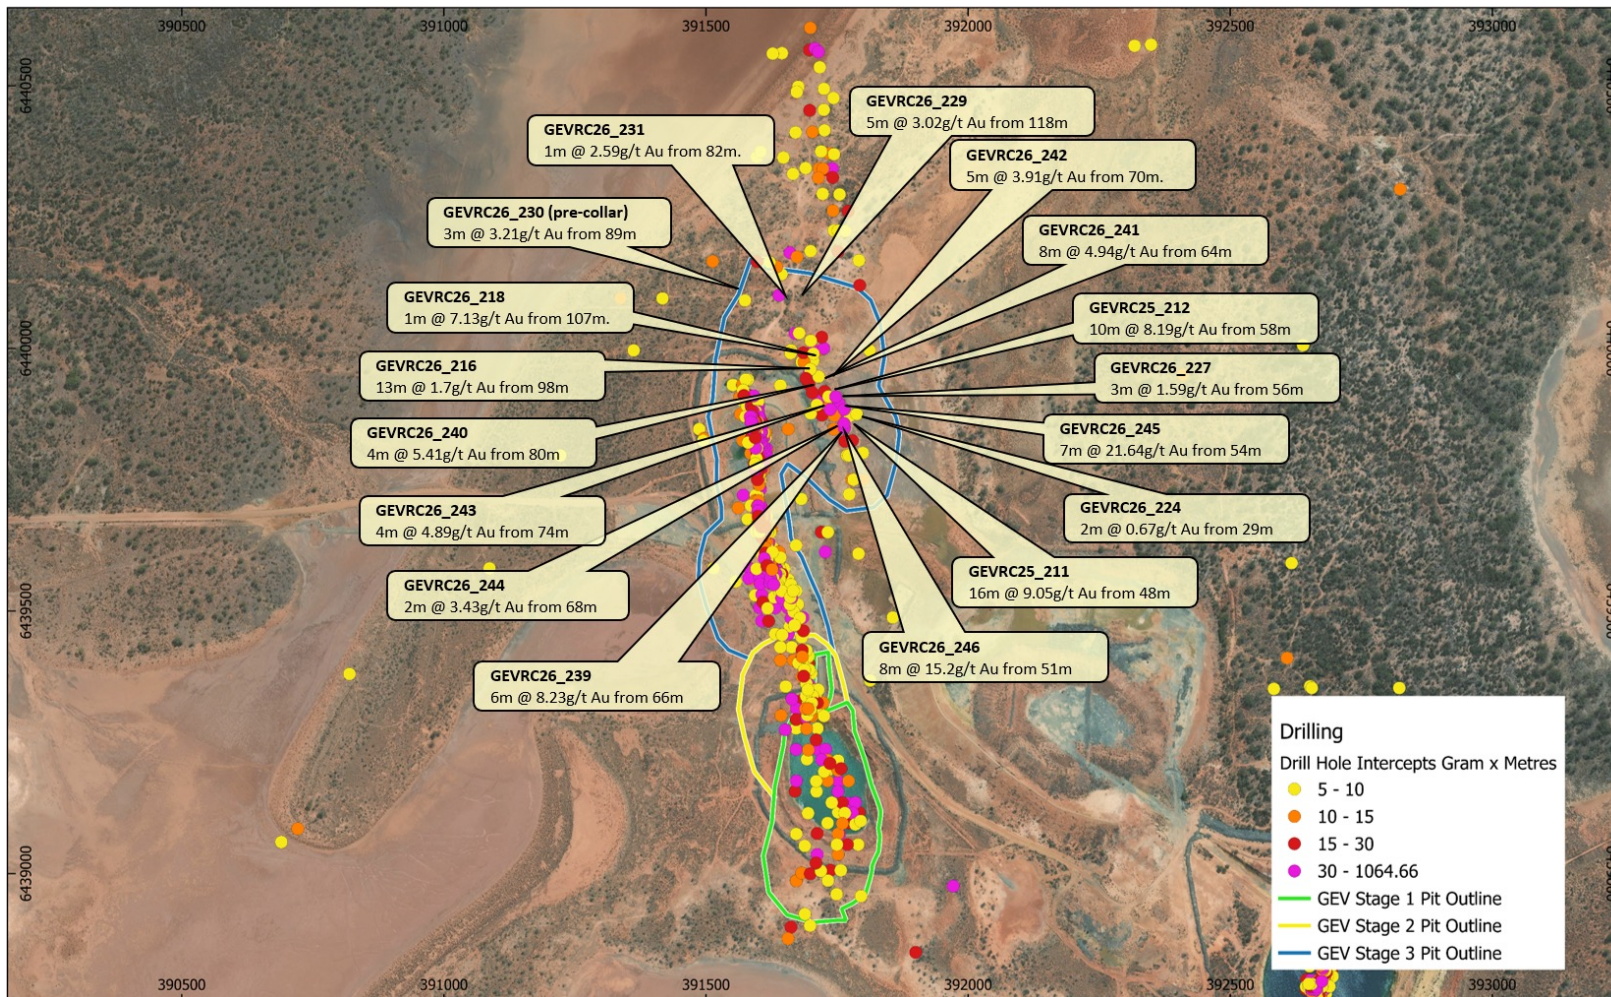

- Stages 1 and 2 are approved by board and being mined.
- Stage 3 infill and grade control drilling returning very strong results with approximately half of results outstanding.
- Stage 3 adds approximately 1 year to Gladstone pit life.

Mainfield – Major Opportunity

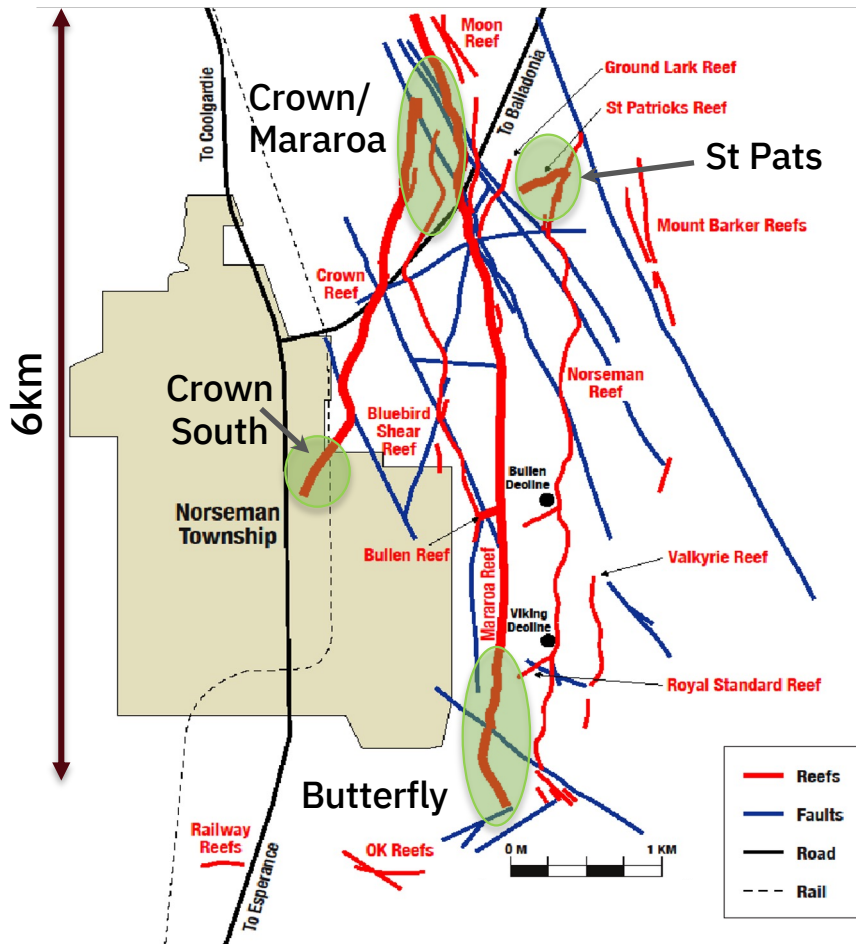

Mainfield is the most prolific mining area at Norseman to date

- First pass drilling completed with focus areas identified.
- Drill areas focused on zones easily accessed from existing infrastructure.
- Large areas unmined previously.

• Very **high-grade mineralisation** encountered in Pantoro drilling:

5.7 m @ 35.85 g/t Au inc. 1.4 m @ 141.57 g/t Au.	
4 m @ 6.86 g/t Au.	
1 m @ 23.5 g/t Au.	2 m @ 6.21 g/t Au.
0.45 m @ 21.9 g/t Au.	2 m @ 5.8 g/t Au.
2 m @ 20.61 g/t Au.	4 m @ 5.68 g/t Au.
2 m @ 15.87 g/t Au.	3 m @ 5.35 g/t Au.
6 m @ 14.94 g/t Au.	4 m @ 4.33 g/t Au.
1 m @ 10.3 g/t Au.	5 m @ 3.99 g/t Au.
2 m @ 10.8 g/t Au.	4 m @ 3.53 g/t Au.
1.15 m @ 8.47 g/t Au.	3 m @ 3.24 g/t Au.
3 m @ 7.72 g/t Au.	5 m @ 3.20 g/t Au.

Refer to ASX release on 13 July 2021 for details.

Mainfield – Multiple additional declines to come



Pantoro has focussed initial work on zones accessible from the Bullen Decline:


O'Briens – New development announced to commence mid-2026.

Crown South – Outstanding drill results with drill programs ongoing. Mineral Resource and Ore Reserve definition underway.


Butterfly – Exploration decline completed and drilling underway with excellent initial results.

Crown Reef - drill platform take off points now accessed with St Patrick's access drive dewatered and rehabilitated. Very large un-mined areas with known high-grade mineralisation.

Remnant Blocks – Multiple large remnant ore blocks under consideration for immediate development.

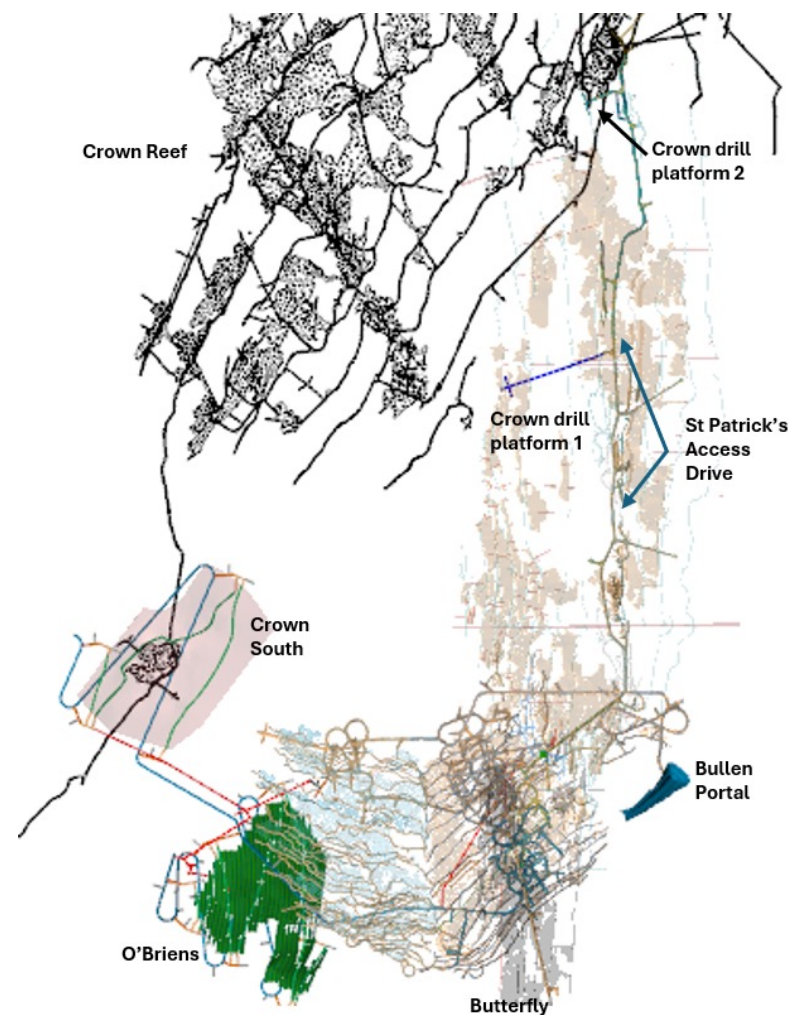


Refer to ASX release on 13 July 2021 for details.

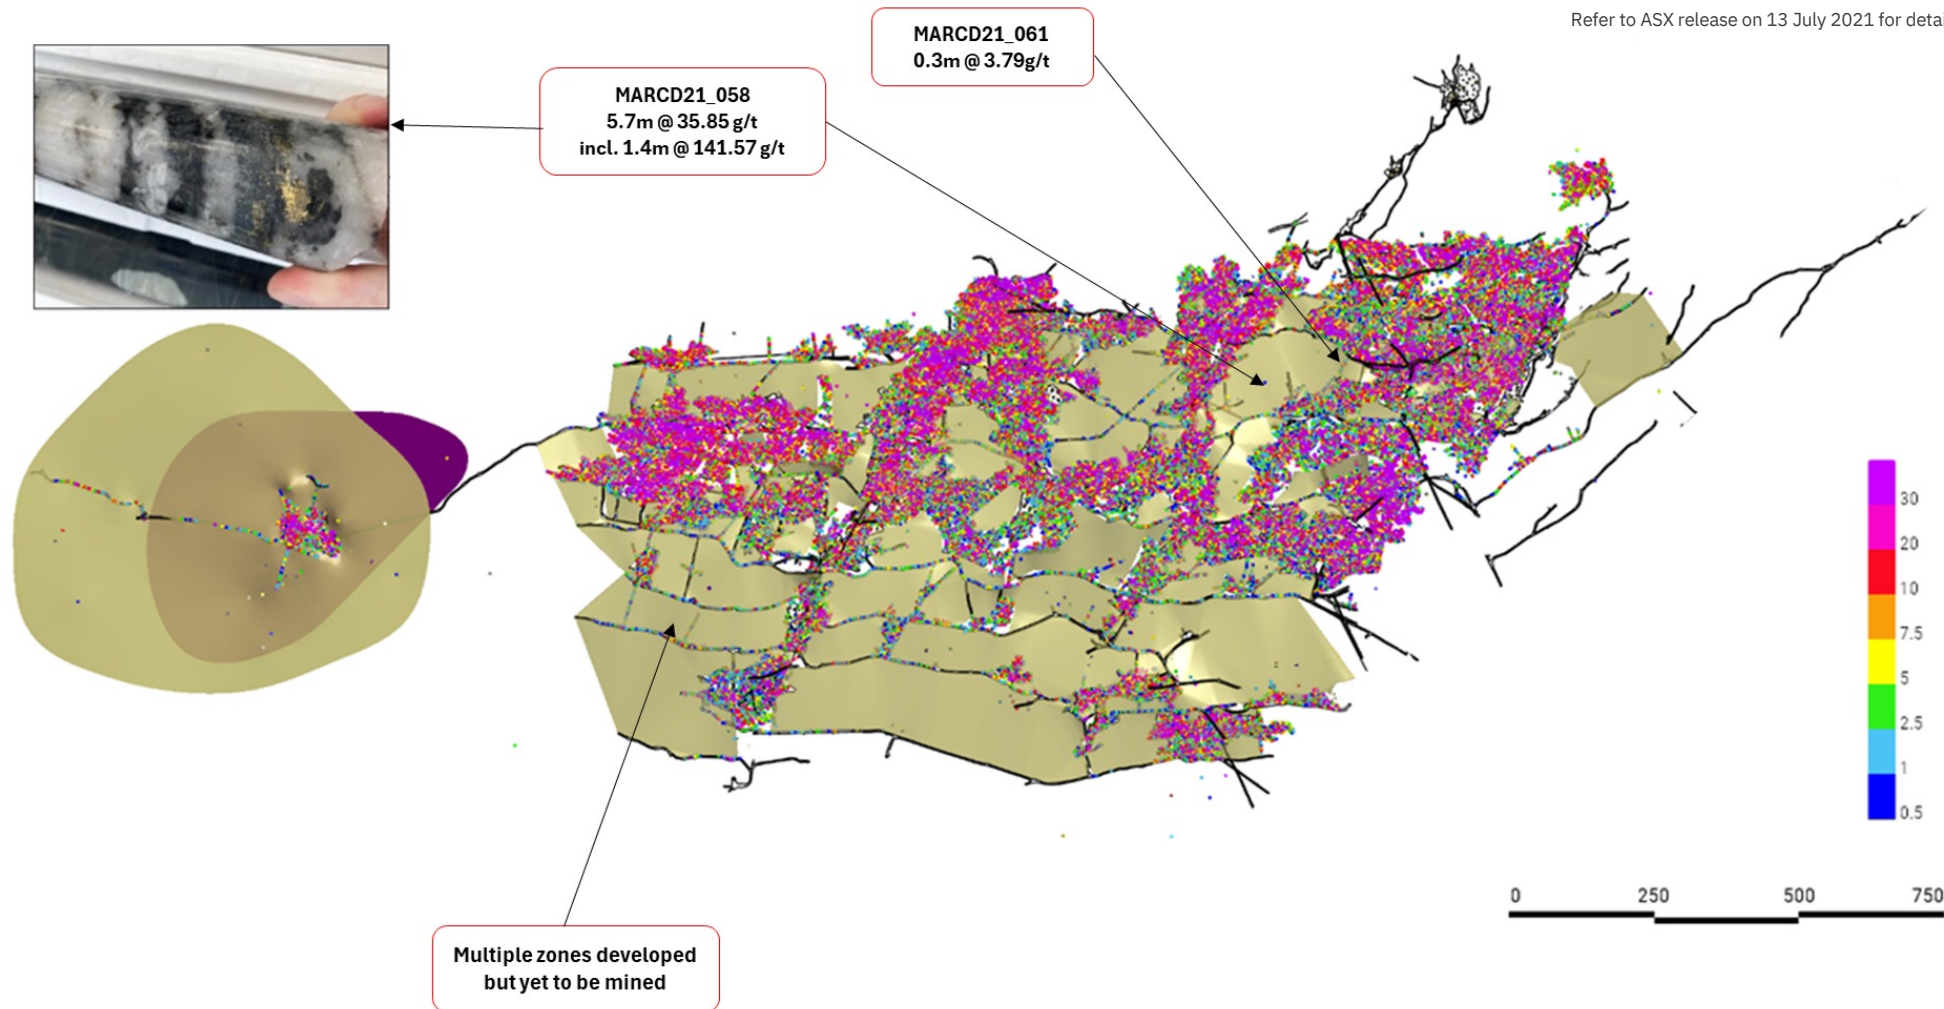


Crown Reef – historical production 1.1 Moz @ 11.2g/t

Plan view of Bullen, O'Briens and Crown South

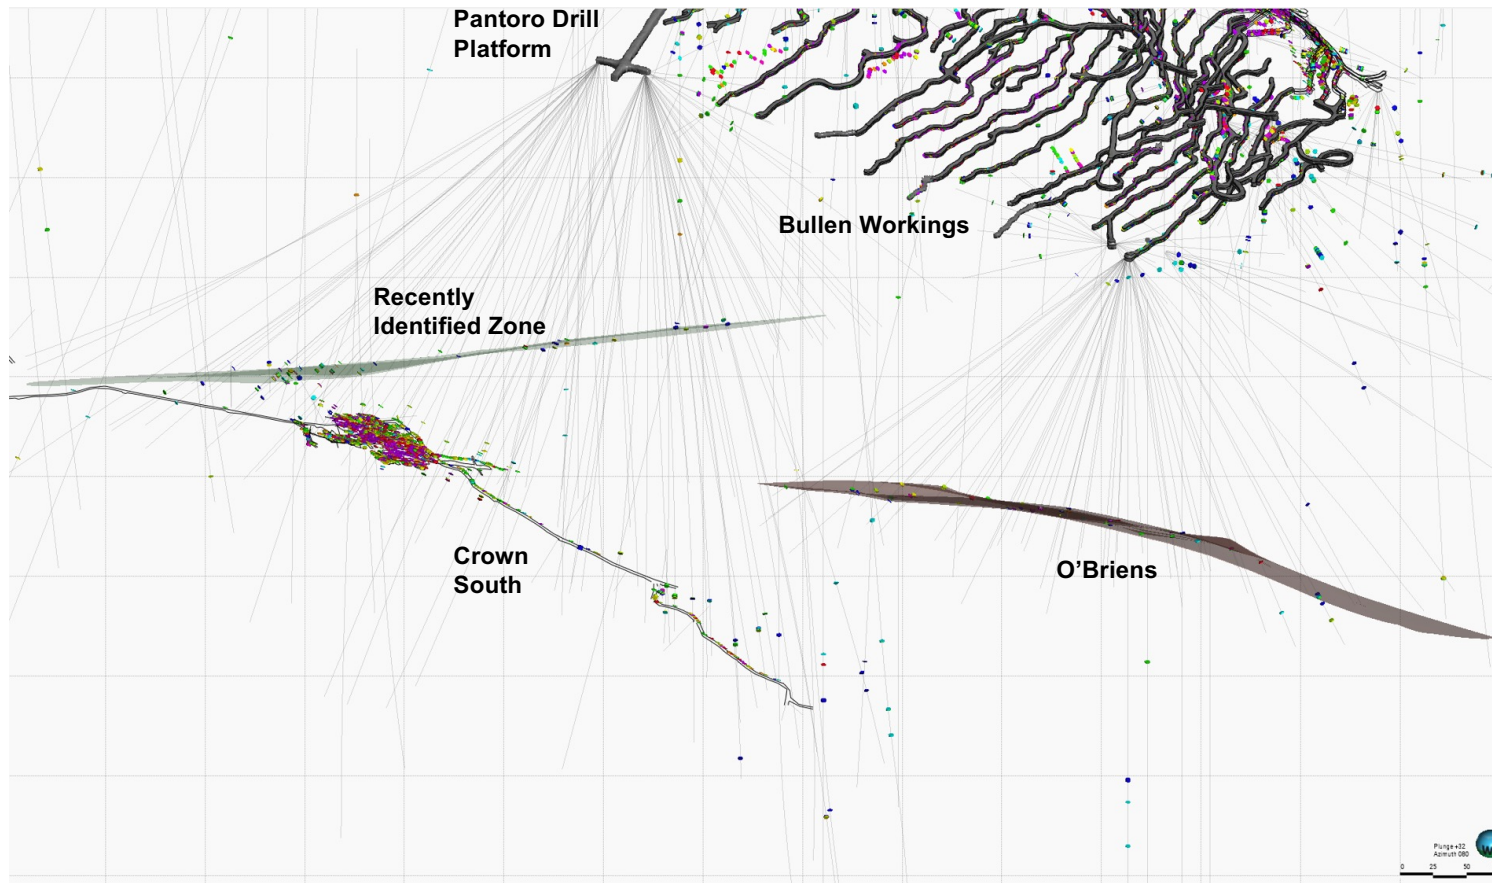


Mainfield Exploration – Crown South and O'Briens shaping up for next production centre

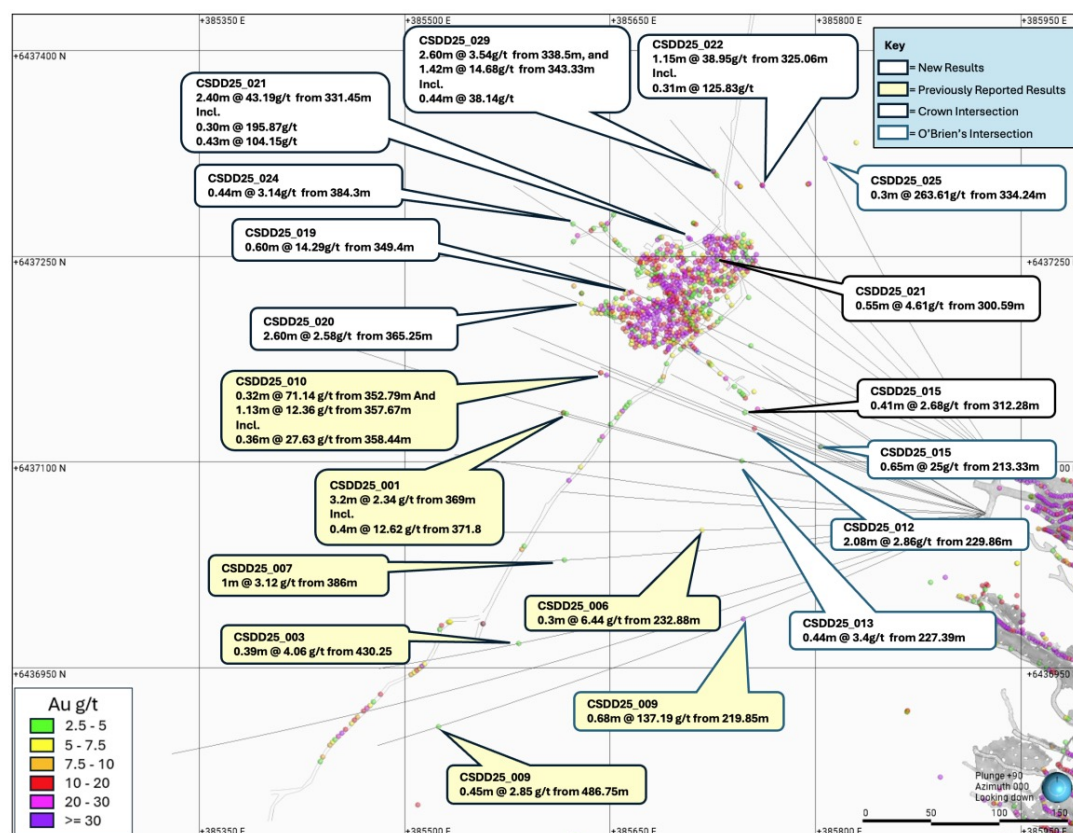


- Drilling has identified a substantial zone of high-grade mineralisation at Crown South with abundant visible gold noted.
- Results to date include[^]:
 - 1.13 m @ 12.36 g/t Au.
 - 0.32 m @ 71.14 g/t Au.
 - 0.7 m @ 8.42 g/t Au.
 - 2.4m @ 43.19g/t Au (inc. 0.3m @ 195.87g/t and 0.43m @ 104.15 g/t).
 - 1.15m @ 38.95g/t Au (inc. 0.31m @ 125.83g/t).
 - 1.42m @ 14.68g/t Au(inc. 0.44m @ 38.14g/t).
 - 0.3m @ 263.61g/t Au.
 - 0.65m @ 25g/t Au.
- Crown South remains open to the South.

[^] Refer to ASX releases on 13 October 2025 and 25 November 2025 for details.

O'Briens Lode – Growth through drilling

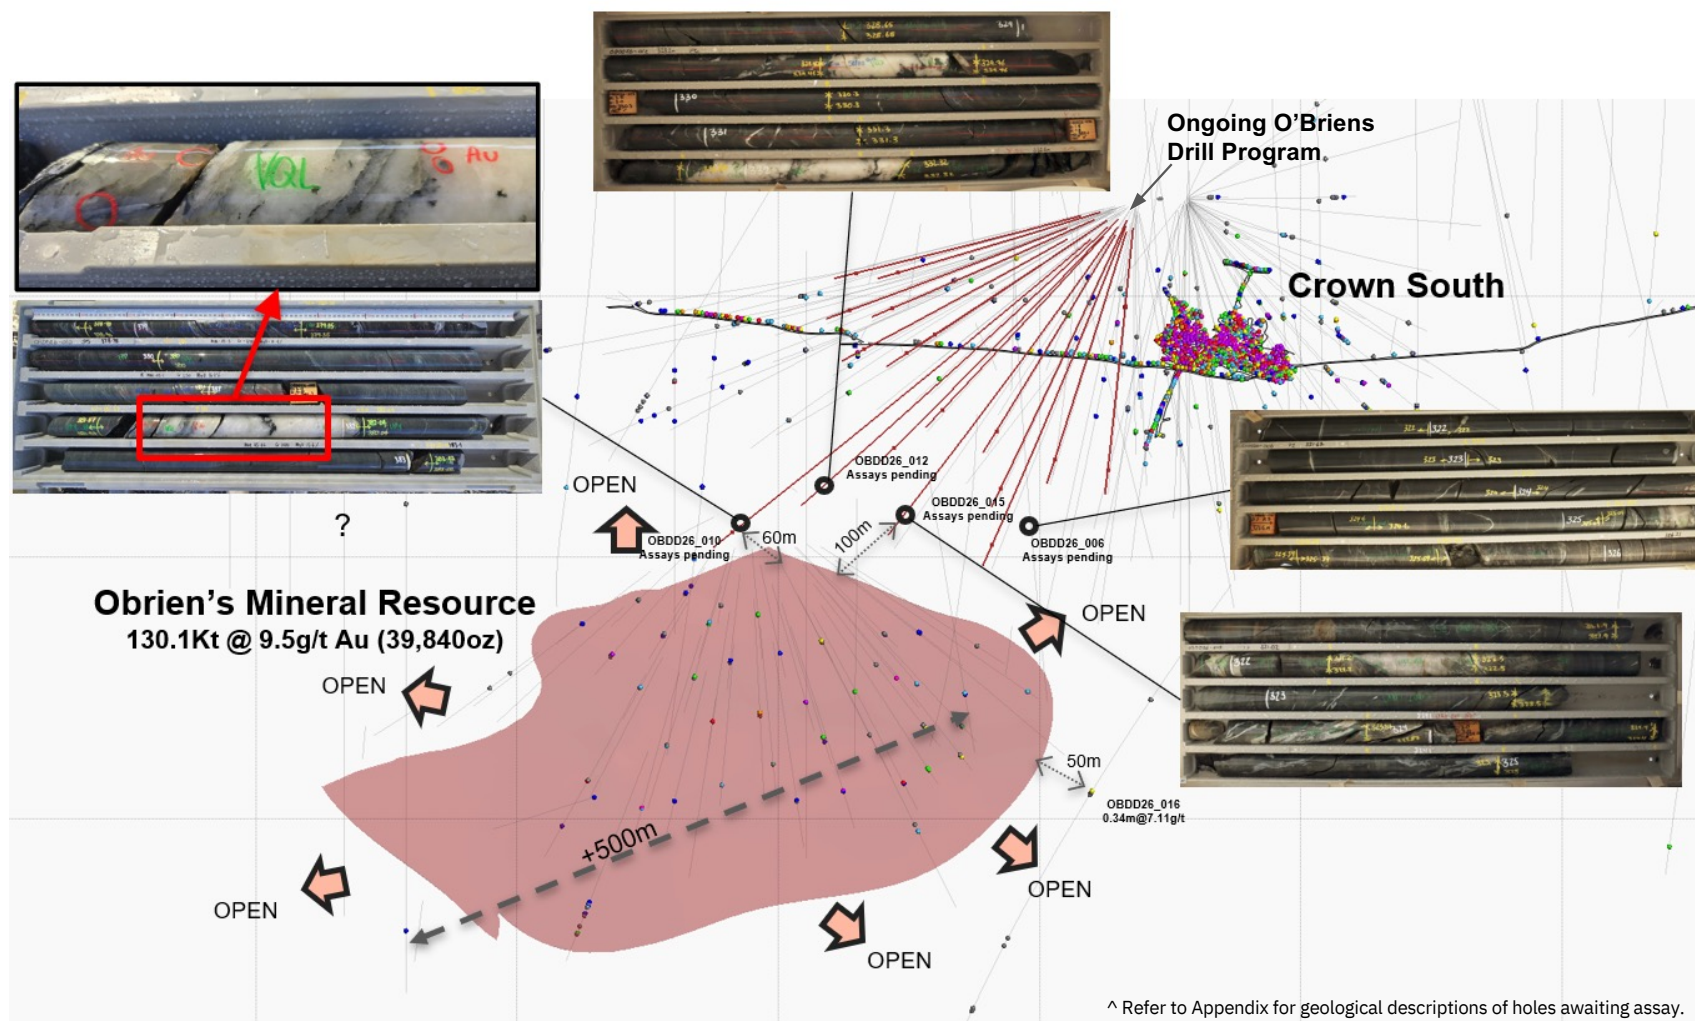


O'Briens Lode – Development commencing mid-2026

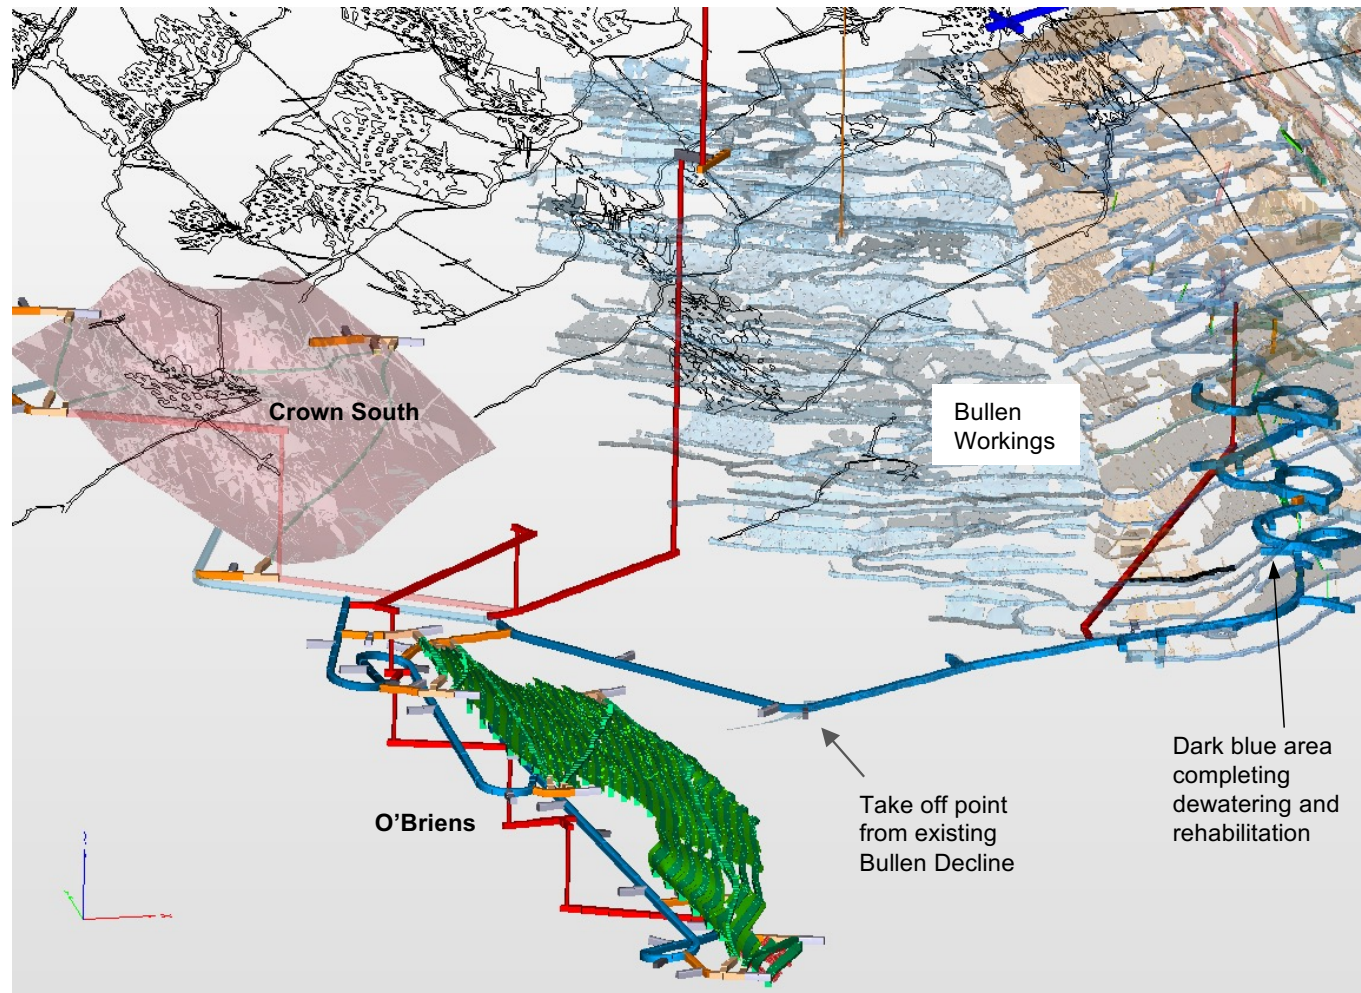


Strong Initial Results in Butterfly



- Area above target zone extensively mined for approximately 200m vertical.
- Excellent strike rate in initial drilling.
- Mineralisation only 70m from exploration decline – easy access.
- Decline can be extended at any time with known mineralisation extending approximately 1.5km south of the current position.

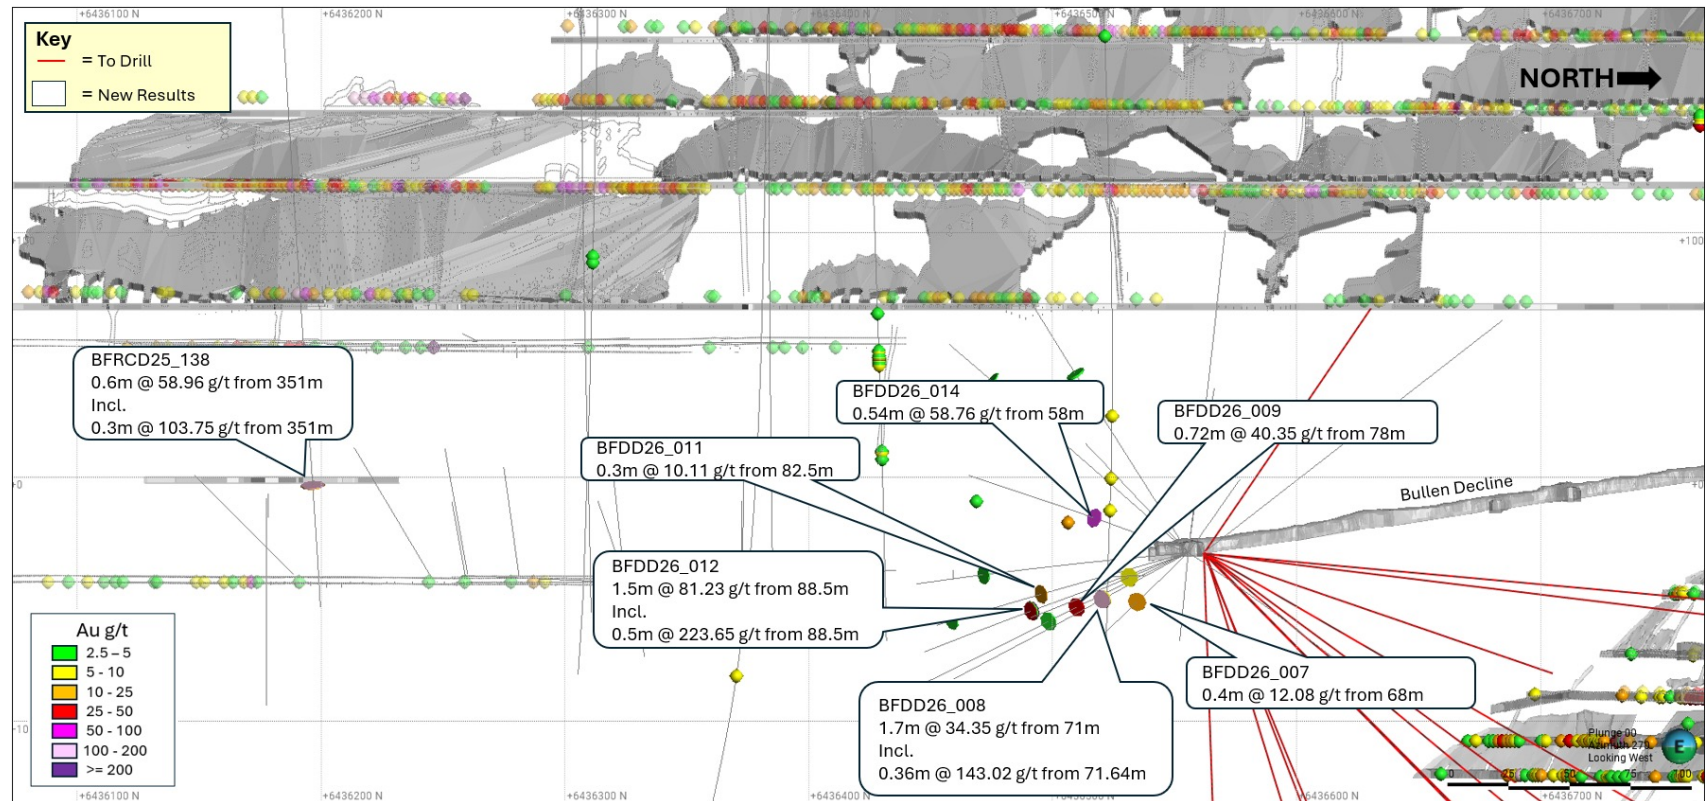

Princess Royal Underground Target

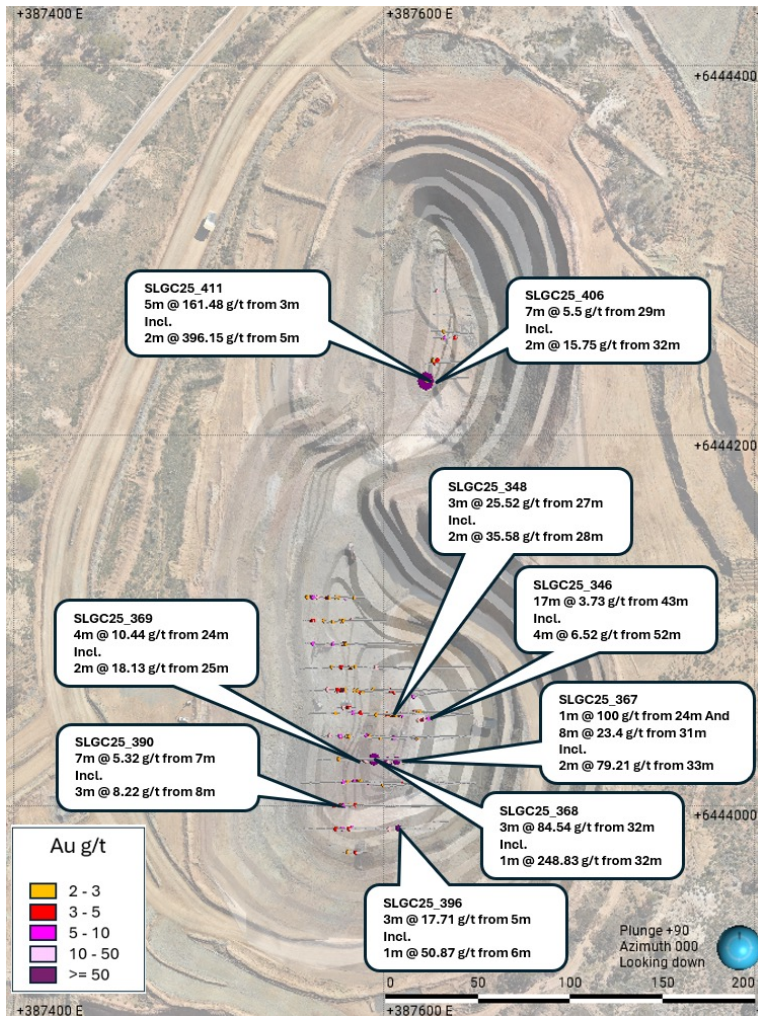


Refer to ASX release on 27 October 2025 for details.

Opportunities over 2km of strike



- **North Royal** - 1.8Moz produced from North Royal Deposits. Underexplored below 300m below surface
- **Renegade** - Northern extension with open pit and deep potential. Follow up extensional exploration drilling
- **Slippers** - depth extensions

North Royal mine produced approximately 1.8 million ounces of gold @ 17g/t and has only been mined to a depth of <350 metres.

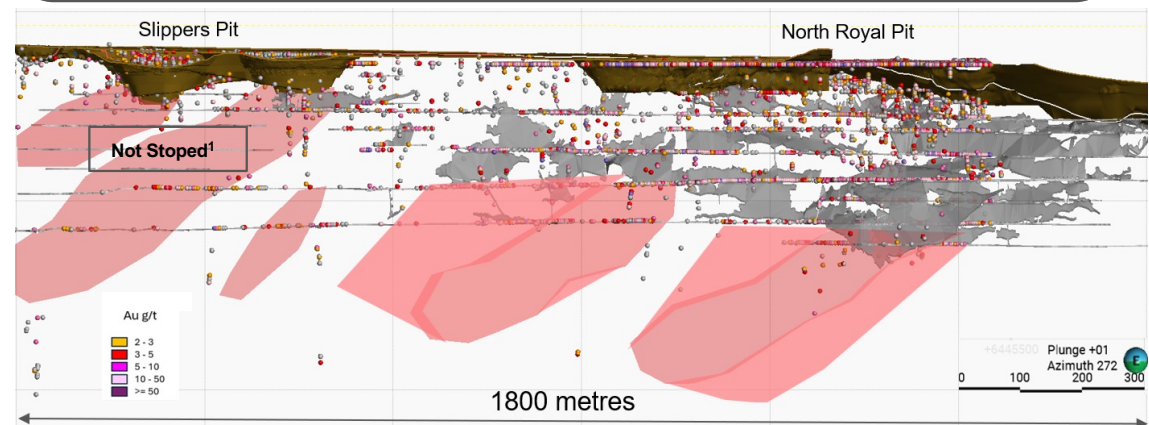

1. Drilling to date has not intercepted stope voids. No known stoping records

First Regional Exploration in 30 Years

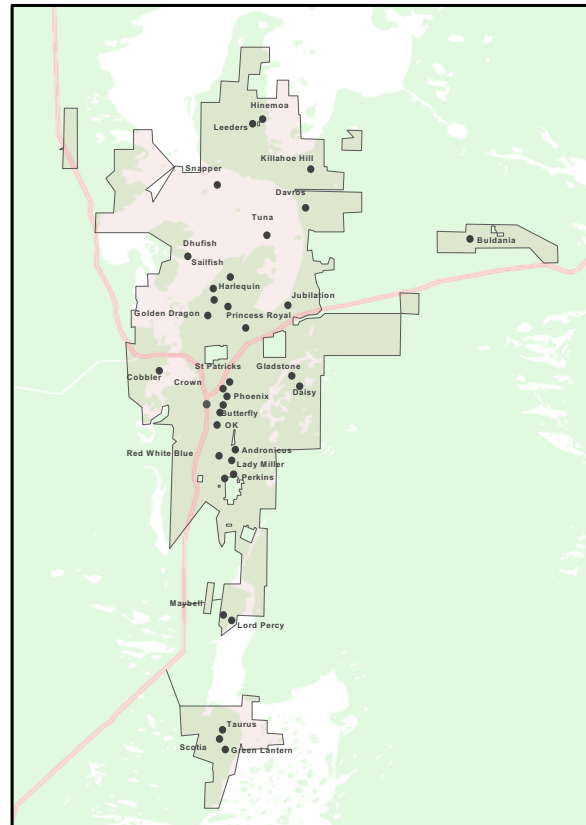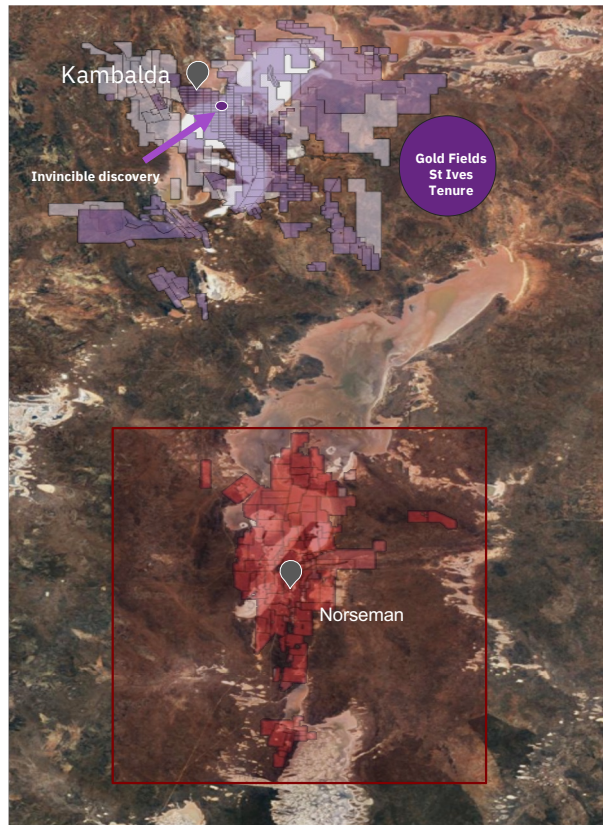

Norseman did not have any effective exploration between the mid-1990's and Pantoro's entry in 2019.

Pantoro is embarking on a project scale regional exploration program – the first for Norseman in three decades.

Norseman salt lakes have had little historical attention other than a brief period between 1990 and 1992.

Harlequin was discovered during that short period and produced 800KOz at 10g/t.

Summary



Exceptional position, strong cashflow

- Cash growth while **building new mines and advancing growth** activities.
- H1 **EBITDA A\$135.5 million.**
- **A\$216.5 million in cash and gold.**

Leveraged to the gold price

- Debt free.
- Unhedged

Positioned for growth

- Growth activities progressing to plan with new production from **Bullen Decline on-track to commence in June/July 2026.**
- Few, if any, Western Australian long-term production centres with known **existing high-grade resources and a major paucity of drilling.**

Media Enquiries: Sam Macpherson
Vector Advisors
smacpherson@vectoradvisors.au
+61 401 392 925

Investor Enquiries: Paul Cmrlec
Managing Director
admin@pantoro.com.au
+61 8 6263 1000

Mineral Resource & Ore Reserve



Pantoro Global Mineral Resource

	Measured			Indicated			Inferred			Total		
	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz
Norseman Gold Project	4,946	2.4	374	19,084	3.1	1,898	19,155	3.8	2,327	43,194	3.3	4,601
Total	4,946	2.4	374	19,084	3.1	1,898	19,155	3.8	2,327	43,194	3.3	4,601

Pantoro Global Ore Reserve

	Proven			Probable			Total		
	kT	Grade	kOz	kT	Grade	kOz	kT	Grade	kOz
Norseman Gold Project	4,565	1.2	179	8,211	2.6	680	12,777	2.1	859
Total	4,565	1.2	179	8,211	2.6	680	12,777	2.1	859

- Refer to ASX Announcement dated 22 September 2025 for full details of the Mineral Resource and Ore Reserve.
- All Open Pits (0.5 g/t cut-off applied) excluding Gladstone-Everlasting (0.7 g/t cut-off applied, OK and Scotia Underground Mines (2.0 g/t cut-off applied)
- Measured and Indicated Mineral Resources are inclusive of those Mineral Resources modified to produce the Ore Reserves.
- Mineral Resource and Ore Reserve statements have been rounded for reporting.
- Rounding may result in apparent summation differences between tonnes, grade and contained metal content.

Appendix 1 – Table of Drill Results

Hole_ID	Northing	Easting	RL	Dip (Degrees)	Azimuth (Degrees)	End of Hole Depth (m)	Comments	Downhole From (m)	Downhole To (m)	Downhole From (m)	Au gpt	Est. True Thickness (m)
GEVRC26_214	6439990	391691	259	-59.8	89.5	90		23	27	4	1.06	3.3
GEVRC26_214	6439990	391691	259	-59.8	89.5	90		72	74	2	1.37	1.6
GEVRC26_216	6439994	391634	260	-60	91.4	144		98	111	13	1.70	10.6
GEVRC26_216	6439994	391634	260	-60	91.4	144	Including	101	104	3	3.91	2.5
GEVRC26_218	6440015	391646	259	-60.2	89.4	132		107	108	1	7.13	0.8
GEVRC26_227	6439881	391779	266	-90	90	66		56	59	3	1.59	1.3
GEVRC26_229	6440165	391534	260	-60.3	90.3	180		119	120	1	13.48	0.8
GEVRC26_229	6440165	391534	260	-60.3	90.3	180		160	164	4	1.77	3.3
GEVRC26_231	6440093	391586	260	-60.4	91.4	192		82	83	1	2.59	0.8
GEVRC26_239	6439883	391700	259	-58.6	88.7	96		31	32	1	1.11	0.8
GEVRC26_239	6439883	391700	259	-58.6	88.7	96		66	72	6	8.23	5
GEVRC26_239	6439883	391700	259	-58.6	88.7	96	Including	67	69	2	20.86	1.7
GEVRC26_240	6439943	391652	260	-63.7	90.5	114		28	29	1	1.14	0.8
GEVRC26_240	6439943	391652	260	-63.7	90.5	114		80	84	4	5.41	3.1
GEVRC26_241	6439909	391713	259	-60.1	90.5	102		41	42	1	7.26	0.8
GEVRC26_241	6439909	391713	259	-60.1	90.5	102		64	72	8	4.94	6.5
GEVRC26_241	6439909	391713	259	-60.1	90.5	102	Including	64	70	6	5.91	4.9
GEVRC26_242	6439918	391688	260	-59.2	89.5	108		70	75	5	3.91	4.1
GEVRC26_242	6439918	391688	260	-59.2	89.5	108		102	103	1	1.13	0.8
GEVRC26_243	6439918	391665	260	-60.1	93	114		74	78	4	4.89	3.3
GEVRC26_243	6439918	391665	260	-60.1	93	114	Including	74	76	2	8.30	1.6
GEVRC26_244	6439892	391680	260	-64.1	89.7	90		68	70	2	3.43	1.6
GEVRC26_245	6439882	391733	259	-59.5	87.5	78		54	61	7	21.64	5.8
GEVRC26_245	6439882	391733	259	-59.5	87.5	78	Including	55	59	4	35.93	3.3
GEVRC26_245	6439882	391733	259	-59.5	87.5	78		65	66	1	1.56	0.8
GEVRC26_246	6439857	391734	260	-59.1	89.1	78		51	59	8	15.22	6.6
GEVRC26_246	6439857	391734	260	-59.1	89.1	78	Including	51	56	5	22.85	4.1
GEVRCD26_230	6440166	391465	260	-60.4	89.9	306.3		89	92	3	3.21	2.4
GEVRC26_224	6439856	391808	267	-90	90	48	NSI					

Hole_ID	Northing	Easting	RL	Dip (Degrees)	Azimuth (Degrees)	End of Hole Depth (m)	Comments	Downhole From (m)	Downhole To (m)	Downhole From (m)	Au gpt	Est. True Thickness (m)
GEVRC26_225	6439839	391799	267	-90	90	54					NSI	
GEVRC26_226	6439858	391788	266	-90	90	60					NSI	
GEVRC26_228	6439907	391773	265	-90	90	78					NSI	
GEVRC26_232	6440092	391521	260	-60	90	230					NSI	

NSI: No significant intersection.

Appendix 2 – Table of Drill Results

Hole ID	Depth from (m)	Depth to (m)	Interval (m)	Geological Description/Summary	Grade (g/t)
OBDD26_010	354.81	360.12	5.31	Porphyry	
	360.12	378.37	18.25	Fine grained Pillow basalts	
	378.37	379.35	0.98	Moderately altered basalt shearzone, with minor sericitic and carbonate alteration --> Porphyry associated	
	379.35	380	0.65	Porphyry	
	380	381.57	1.57	"Crown Dyke" fine to medium grained Ultramafic (Cr=1210ppm & MgO=14.4%)	
	381.57	382.04	0.47	Moderately biotite rich laminated quartz vein (VQL), with finely disseminated specks of visible gold tracking within the lamiations.	Assays Pending
	382.04	383.02	0.98	"Crown Dyke" fine to medium grained Ultramafic (Cr=1020ppm & MgO=15.6%)	
	383.02	386	2.98	Moderately altered basalt shearzone.	
	386	421.84	35.84	Fine grained Pillow basalts	
OBDD26_012	322.35	324.42	2.07	Foliated fine grained pillow basalt	
	324.42	325.31	0.89	Foliated coarse grain gabbro	
	325.31	325.38	0.07	Narrow biotite, weakly laminated quartz vein with minor chalcopyrite, pyrrhotite.	
	325.38	327.61	2.23	Moderately altered gabbro shear zone	
	327.61	327.75	0.14	Biotite epidote shear hosting weakly brecciated biotite vein with minor chalcopyrite and pyrrhotite and pyrite	
	327.75	329.46	1.71	Fine grained basalt shear zone biotite, epidote	
	329.46	329.7	0.24	White quartz vein, chlorite altered wall rock clasts on hanging-wall and footwall contacts , associated with cp, po	Assays Pending
	329.7	331.87	2.17	Fine grained basalt shear zone biotite, epidote	
	331.87	332.32	0.45	Brecciated shear vein, moderately altered and weakly sheared basalt, Chalcopyrite, Pyrrhotite and pyrite	
	332.32	332.9	0.58	Shear zone	
OBDD26_015					
	316.91	317.25	0.34	Fine grained weakly altered pillow basalts	
	317.25	317.5	0.25	Weakly developed quartz vein, strong biotite, sericite chlorite alteration	
	317.5	321.94	4.44	Moderately altered biotite, chlorite shear zone	

Hole ID	Depth from (m)	Depth to (m)	Interval (m)	Geological Description/Summary	Grade (g/t)
	321.94	322.08	0.14	Quartz vein, brecciated wall rock contact, chlorite, silica, biotite	Assays Pending
	322.08	322.3	0.22	Foliated biotite sheared basalt	
	322.3	322.48	0.18	Crystalline quartz vein with chlorite/biotite, sericite wall rock clasts	
	322.48	323	0.52	Biotite chlorite weakly foliate sheared fine-grained basalt	
	323	323.84	0.84	Strongly sheared quartz carbonate vein, strong vein associated sericite, biotite alteration with minor pyrrhotite	
	323.84	332.65	8.81	Weakly altered and sheared basalt.	
CSD26_006					
	295.02	317.42	22.4	Fine grained Pillow basalts	
	317.42	318.03	0.61	Medium grained dolerite	
	318.03	318.14	0.11	brecciated quartz vein cemented by interstitial chlorite	
	318.14	318.99	0.85	Weakly altered medium grained dolerite	
	318.99	325.2	6.21	Fine grained basalts	
	325.2	325.3	0.1	Clear to bucky laminated quartz vein (VQL) +/-pyrite	Assays Pending
	325.3	325.69	0.39	Moderately altered pillow basalt	
	325.69	327.13	1.44	Minor Felsic porphyry intruding sheared contact pillowed basalts.	
	327.13	330.47	3.34	Weakly altered basalt	
	330.47	330.69	0.22	Minor Felsic porphyry, carbonate	
	330.69	345	14.31	sheared basalts with common by wispy discontinuous carbonate-quartz veins. minor bucky quartz vein	

Appendix 3 – JORC Code 2012 Edition – Table 1

Section 1: Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- This release reports assay results from surface infill and extensional RC drilling undertaken to infill and expand the current Mineral Resource at the Gladstone-Everlasting prospect. - For RC samples, a Metzke fixed cone splitter is used, with double chutes for field duplicates, Infinite adjustment between 4 – 15% per sample chute sampled every 1m. - RC Samples – 2-7kg samples are currently submitted to the onsite Intertek primary assay facility in Norseman, WA in preparation for photon assay analysis. - Where visible gold is encountered and observed during logging, Screen Fire Assays are conducted when appropriate. Blanks (bricks) are routinely run through the core saw after observations of visible gold. Feldspar flushes are routinely run through crushers after samples containing visible gold and assayed to determine potential contamination. - Prior to May 2025, Pantoro RC and diamond core samples were dispatched to an external accredited laboratory (Bureau Veritas (BVA) Kalgoorlie) where they were crushed (<10mm) and pulverised to a pulp (P90 75 µm) in preparation for fire assay (40g charge). - Historic RC Drilling - RC drilling was used to obtain 1 m samples from which 2-3 kg split via a splitter attached to the cyclone assembly of the drill rig. From the commencement of the mine until late 1995 the assaying was done on site until the closure of the onsite laboratory the samples were sent to Silver Lake lab at Kambalda. From November 2001 the samples were sent to Analabs in Kalgoorlie, subsequently owned and operated by the SGS group. The samples have always been fire assayed with various charge weights (generally either 30 or 50g). The method was (using the SGS codes) DRY11 (sample drying, 105°C), CRU24 (crush > 3.5kg, various mesh sizes per kg), SPL26 (riffle splitting, per kg), PUL48 (pulv, Cr Steel, 75µm, 1.5 to 3kg), FAA505 (AU FAS, AAS, 50g) (two of these were performed), and WST01 (waste disposal).

Criteria	JORC Code explanation	Commentary
		- At Analabs the total sample was dried and milled in an LM5 mill to a nominal 90% passing -75µm. An analytical pulp of approximately 200g was sub sampled from the bulk and the milled residue was retained for future reference. All the preparation equipment was flushed with barren feldspar prior to the commencement of the job. A 50 gram sample was fused in a lead collection fire assay. The resultant prill is dissolved in aqua regia and the gold content of the sample is determined by AAS. For samples that contained visible free gold the screen fire assay method was used. It involved a 1000g sample screened through a 106µm mesh. The resulting plus and minus fractions were then analysed for gold by fire assay. Information reported included size fraction weight, coarse and fine fraction gold content and calculated gold. - Historic Diamond Drilling - There is limited information pertaining to the diamond drilling methods used by previous operators, but they are assumed to have been consistent with industry standard practice for the time.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	RC – Reverse circulation drilling was carried out using a face sampling hammer and a 5&5/8 inch diameter bit.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- All holes were logged onsite by an experienced geologist. Recovery and sample quality were visually observed and recorded. - RC sample recoveries are monitored by visual inspection of split reject, and lab weight samples are recorded and reviewed. - RC drilling by previous operators is considered to have been undertaken according to industry standard practices for the time. - Historic holes have been inspected and core in the ore zones appears competent, with no evidence of core loss.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	- Geological logging is completed by a qualified geologist and logging parameters include: depth from, depth to, condition, weathering, oxidation, lithology, texture, colour, alteration style, alteration intensity, alteration mineralogy, sulphide content and composition, quartz content, veining, and general comments. - Logging is quantitative and qualitative with all core photographed wet. - All RC samples are chip trayed with each chip tray being photographed. 100% of the relevant intersections are logged. - Paper logs of historic drill holes have been cross checked to database as part of the validation.

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	• As of May 2025, drill core preparation and analysis is performed by Intertek at their analysis facility in Maddington, Perth, WA in preparation for photon assay. From September 2025, an onsite photon assay facility was also utilised for analysis. Using a robotic shuttle, high energy x-rays are then fired at the sample causing excitation of atomic nuclei allowing detection of gold content. • Sample preparation for photon assay involves drying the sample at 105 degrees celsius for 12 hours, followed by crushing the sample to 85% passing 3 mm using either an Orbis 100 or Orbis 50 crusher. A ~500g sample jar is then filled for analysis. • For photon assay, fill checks are carried out for every sample to determine the jar fill rate, which is an 80% minimum fill per sample. Any sample that falls below this threshold is sent back to the sample preparation stage. The jar fill rate is used for density and volume calculations as part of the final reported gold value. • Prior to May 2025, sample preparation and assaying of diamond drill core and RC samples using fire assay was performed at BVA at their laboratory in Kalgoorlie, WA. • For fire assay samples, coarse grind checks at the crushing stage (3 mm) were carried out at a ratio of 1:25 samples with 90% of the sample volume reporting through the sieve required for a pass. Pulp grind checks at the pulverizing stage (75 µm) were carried out at a ratio of 1:25 samples with 90% of the sample volume reporting through the sieve required for a pass. • Field duplicates i.e. other half of core or ¼ core have not been routinely collected. • RC samples are taken off the fixed cone splitter, generally dry. • Field duplicates for RC drilling are routinely collected • RC drilling and sampling practices by previous operators are considered to have been conducted to industry standard for the time.

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	• The assay methods used, including fire assay with 40g charge approach total mineral consumption and are typical of industry standard practice. Photon assay offers improved measurement precision, simplified sample preparation and elimination of pulverisation. The technique is considered total and appropriate for the style of mineralisation under consideration. The increased size of photon assay sample is considered adequate to compensate for the larger particle size of the sample given the nature of mineralization being measured. • Standards are inserted at a ratio of 1:20. The results are reviewed on a per-batch basis and batches of samples are re-analysed if the result is greater than three standard deviations from the expected result. Any result outside of two standard deviations is flagged for investigation by a geologist and may also be re-assayed. QAQC results are reviewed on monthly and longer timeframes. • Blanks are inserted into the sample sequence at a ratio of 1:50, except where high grade mineralisation is expected. In these cases, a Blank is inserted after the high grade sample to test for contamination. Results greater than 0.2 g/t are investigated, and re-assayed if appropriate. • A range of Certified Reference materials (CRM') are selected to cover the wide range of grades in the deposits. CRM's used are appropriate and certified for the analysis types undertaken. • Lab standards and repeats are included as part of the QAQC system. In addition, the laboratory has its own internal QAQC comprising standards, blanks and duplicates. • Follow-up re-assaying is performed by the laboratory upon company request following review of assay data. Acceptable bias and precision is noted in results given the nature of the deposit and the level of classification. • In relation to the historic assay results it is assumed the procedures adopted at the WMC laboratory in Kalgoorlie and subsequently Analabs post June 1996 were to industry standard for the time.
Verification of sampling and assaying	• The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data.	• Significant intersections are noted in logging and checked with assay results by company personnel both on site and in Perth. • There are no twinned holes drilled as part of these results. • All primary data is logged either digitally or on paper and later entered into an SQL database. Data is visually checked for errors before being sent to an external database manager for further validation and uploaded into an offsite database. Hard copies of original drill logs are kept in onsite office. • Visual checks of the data are completed in Datamine Studio RMTM and Leapfrog GeoTM mining software. • No adjustments have been made to assay data unless in instances where standard tolerances are not met, and re-assay is ordered.

Criteria	JORC Code explanation	Commentary
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- The RC drill holes used a REFLEX GYRO with survey measurements every 5m. - A Champ Discover magnetic multi-shot drill hole survey tool has also been utilised for comparison on some holes taking measurements every 30m. - Surface RC/DD drilling is marked out using GPS and final pickups using DGPS collar pickups - The project lies in MGA 94, zone 52. - Topographic control uses DGPS collar pickups and external survey RTK data and is considered adequate for use. - Pre Pantoro survey accuracy and quality is assumed to be industry standard.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	- The surface infill and extensional drilling was undertaken on drill lines spaced from 20m to 40m apart and was targeted to achieve a drillhole spacing of 20-30m. Spacing across section lines varies depending on pre-existing hole positions but ranges from 10-20m. - No compositing is applied to RC sampling. - All RC samples are collected at 1m intervals.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- Drilling is generally perpendicular to the orebody where possible, other than the limitations introduced by the need to drill fans and access limitations imposed by existing workings. All intervals are reviewed relative to the understanding of the geology and true widths calculated and reported in the tables attached in the body of the report. - Key mineralised structures (mineralised quartz-sulphide veins) vary in orientation but generally dip at 45° towards 286° TN. - No bias of sampling is believed to exist through the drilling orientation. - A number of the reported holes are drilled at an oblique angle to the strike of the ore and true widths have been calculated and reported in the table accompanying this report.
Sample security	The measures taken to ensure sample security.	- The chain of custody is managed by Pantoro employees and contractors. Samples are stored on site in a secured area and delivered in sealed bags to both the onsite and external laboratories. - Samples are tracked during shipping. - Pre Pantoro sample security is assumed to be consistent and adequate.

Criteria	JORC Code explanation	Commentary
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	- No audit or reviews of current sampling techniques have been undertaken however the data is managed by an offsite data scientist who ensures all internal checks/protocols are in place. - Drillhole data was previously managed in DatashedTM. Following an internal review, the company transitioned data management to the PlexerTM platform in early 2025. Standard validation and verification procedures were completed as part of the migration process.

Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The tenements where the drilling has been completed is 100% held by Pantoro. These are: M63/42 and M63/659. - The tenement is in good standing, and no known impediments exist.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- Gold was discovered in the area 1894 and mining undertaken by small Syndicates. - In 1935 Western Mining established a presence in the region and operated the Mainfield and Northfield areas under the subsidiary company Central Norseman Gold Corporation Ltd. The Norseman asset was held within a company structure whereby both the listed CNGC held 49.52% and WMC held a controlling interest of 50.48%. They operated continuously until the sale to Croesus in October 2001 who then operated until 2006. During the period of Croesus management, the focus was on mining from the Harlequin and Bullen Declines accessing the St Pats, Bullen and Mararoa reefs. Open Pits were HV1, Daisy, Gladstone, and Golden Dragon with the focus predominantly on the high-grade underground mines. - From 2006-2016 the mine was operated by various companies with exploration being far more limited than that seen in previous years.

Criteria	JORC Code explanation	Commentary
Geology	Deposit type, geological setting and style of mineralisation.	- The Norseman gold deposits are located within the southern portion of the Eastern Goldfields Province of Western Australia in the Norseman-Wiluna greenstone belt in the Norseman district. Deposits are predominantly associated with near north striking easterly dipping quartz vein within metamorphosed Archean mafic rocks of the Woolyeenyer Formation located above the Agnes Venture slates which occur at the base. - The principal units of the Norseman district are greenstones which are west dipping and interpreted to be west facing. The sequence consists of the Penneshaw Formation comprising basalts and felsic volcanics on the eastern margin bounded by the Buldania granite batholith, the Noganyer Iron Formation, the Woolyeenyer formation comprising pillow basalts intruded by gabbros and the Mount Kirk Formation a mixed assemblage. - The mineralisation is hosted in quartz reefs in steeper shears and flatter linking sections, more recently significant production has been sourced from NNW striking reefs known as cross structures (Bullen). Whilst several vein types are categorised, the gold mineralisation is predominantly located in the main north trending reefs which in the Mainfield area strike for over a kilometre in length. The quartz/sulphide veins range from 0.5 metres up to 2 metres thick; these veins are zoned with higher grades occurring in the laminated veins on the margins and central bucky quartz which is white in colour. Bonanza grades are associated with native gold and tellurides with other accessory sulphide minerals being galena, sphalerite, chalcopyrite, pyrite and arsenopyrite. - The long-running operations at Norseman have provided a good understanding of the controls of mineralisation as well as the structural setting of the deposits. The overall geology of the Norseman area is well understood with 3D Fractal Graphic mapping and detailed studies, adding to a good geological understanding to the area. The geometry of the main lodes at Norseman are well known and plunge of shoots predictable in areas, however large areas remain untested by drilling with the potential for new spurs and cross links high. Whilst the general geology of lodes is used to constrain all wireframes, predicting continuity of grade has proven to be difficult at the higher grades when mining and in some instances (containing about 7% of the ounces) subjective parameters have been applied. - The Gladstone-Everlasting prospect is hosted within a corridor of ductile shearing and biotite alteration. The main body of Gladstone-Everlasting mineralisation is hosted within a sequence of massive to pillowed and amygdaloidal basalt that has been intruded by several dolerite sills. - Folding and boudinage of mineralisation-stage features is widely developed at Gladstone-Everlasting .

Criteria	JORC Code explanation	Commentary
		The Gladstone-Everlasting mineralisation is closely associated with quartz-pyrite-pyrrhotite veining, and biotite-chlorite-pyrite-pyrrhotite alteration in the mafic rocks. Mineralised quartz-sulphide veins within the main shear zone are dominantly shear veins, developed sub-parallel to shearing.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: » easting and northing of the drill hole collar » elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar » dip and azimuth of the hole » down hole length and interception depth » hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- A table of drill hole data pertaining to this release is attached. - All holes with results available since the last public announcement related to this project are reported.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	- Reported drill results are uncut. - All relevant intervals to the reported mineralised intercept are length weighted to determine the average grade for the reported intercept. - All significant intersections are reported with a lower cut off of 1 g/t Au including a maximum of 2m of internal dilution. Individual intervals below this cut off are reported where they are considered to be required in the context of the presentation of results. - No metal equivalents are reported.
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	- Surface RC/DD drilling is generally conducted perpendicular to the orebody where drill access allows it. - True widths are calculated and reported for drill intersections which intersect the lodes obliquely. - Downhole lengths are reported and true widths are calculated in both 3D using trigonometry and cartographic planes (section and plan view) using a formula in Excel.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Appropriate diagrams are included in the report.

Criteria	JORC Code explanation	Commentary
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	- All drill results available since the last public announcement are included in the tables. - Diagrams show the location and tenor of both high and low grade samples. - For reporting of historic drill hole intervals, holes relevant to the area of interest have been annotated where appropriate.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No other meaningful data to report.
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	These drill results are part of ongoing grade control and extensional drilling to infill and extend the known Gladstone-Everlasting Mineral Resource.

Appendix 4 – Compliance Statements

Exploration Targets, Exploration Results

The information in this report that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Scott Huffadine, a Competent Person who is a Member of the Australian Institute of Geoscientists. Mr Huffadine is a full time employee of the company. Mr Huffadine is eligible to participate in short and long term incentive plans of and holds shares and options in the Company. Mr Huffadine has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Huffadine consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Mineral Resources and Ore Reserves

This announcement contains estimates of Pantoro Gold's Ore Reserves and Mineral Resources, as well as estimates of the Norseman Gold Project's Ore Reserves and Mineral Resources. The information in this announcement that relates to the Ore Reserves and Mineral Resources of Pantoro Gold has been extracted from a report entitled 'Annual Mineral Resource & Ore Reserve Statement' announced on 22 September 2025 and is available to view on the Company's website (www.pantoro.com.au) and www.asx.com (Mineral Resource & Ore Reserve Announcement).

For the purposes of ASX Listing Rule 5.23, Pantoro Gold confirms that it is not aware of any new information or data that materially affects the information included in this Mineral Resource & Ore Reserve Announcement and, in relation to the estimates of Pantoro Gold's Ore Reserves and Mineral Resources, that all material assumptions and technical parameters underpinning the estimates continue to apply and have not materially changed. Pantoro Gold confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from that announcement.

Forward Looking Statements

Certain statements in this report relate to the future, including forward looking statements relating to Pantoro's financial position and strategy. These forward looking statements involve known and unknown risks, uncertainties, assumptions and other important factors that could cause the actual results, performance or achievements of Pantoro to be materially different from future results, performance or achievements expressed or implied by such statements. Actual events or results may differ materially from the events or results expressed or implied in any forward looking statement and deviations are both normal and to be expected. Other than required by law, neither Pantoro, their officers nor any other person gives any representation, assurance or guarantee that the occurrence of the events expressed or implied in any forward looking statements will actually occur. You are cautioned not to place undue reliance on those statements.