

26 March 2024

KORSNÄS – A MAJOR REE DISCOVERY IN EUROPE FURTHER SPECTACULAR ASSAY RESULTS

Highlights

- Prospech has received further spectacular assay results from 1,020 samples collected across 49 historic Korsnäs drill holes
- Significant high-grade Total Rare Earth Oxides (TREO¹) intersections extend the known structures at depth and along strike
- Significant high-grade TREO assay results are detailed below and include the following spectacular and important results:
 - **KR-186:** 24.0m at 17,649 ppm TREO from 37.2m including 7.3m @ 49,324 ppm TREO from 37.2m (15,926 ppm NdPr oxide)
 - **KR-189:** 31.7m @ 8,068 ppm TREO from 41.5m including 11.1m @ 11,133 ppm TREO from 49.8m
 - **KR-214:** 4.6m @ 45,674 ppm TREO from 365.5m
High-grade mineralisation 260 metres below the lowest mine level, showcasing potential depth extension
 - **KR-251:** 8.1m @ 10,075 ppm TREO from 73.0m
High-grade mineralisation 1.5 kilometres NW of the mine, showcasing potential strike extension
- Further assay results are pending
- Preparation underway for metallurgical test work

Prospech Limited (ASX: PRS, **Prospech** or **the Company**) is delighted to announce the assay results for 1,020 samples gathered from 49 historic diamond drill holes at the exciting Korsnäs high-grade Rare Earth Elements (**REE**) project in southwest Finland (Figure 1). These samples contribute to a total of 1,896 assays reported from 120 drill holes to date. Additionally, there are currently 1,840 pending samples from over 100 drill holes undergoing processing at the GTK facility in Loppa or the assay laboratory.

¹ TREO = Total Rare Earth Oxides which is the sum of La₂O₃, CeO₂, Pr₆O₁₁, Nd₂O₃, Sm₂O₃, Eu₂O₃, Gd₂O₃, Tb₄O₇, Dy₂O₃, Ho₂O₃, Er₂O₃, Tm₂O₃, Yb₂O₃, Lu₂O₃ and Y₂O₃.



Level 2, 66 Hunter Street, Sydney NSW 2000 Australia



As previously reported (ASX announcements: 11 May 2023, 14 June 2023, 5 September 2023, 24 October 2023, 21 November 2023, 12 December 2023, 16 January 2024 and 5 February 2024), the Company is in the enviable position of being able to undertake an extensive REE sampling program of the historical Korsnäs core held by the Geologic Survey of Finland (**GTK**) at their data storage facility without having to incur the cost of drilling.

It is worthy of repeating that previous activities at the historic Korsnäs mine focused solely on lead (Pb) exploration, overlooking REE mineralisation within the drill core. REEs were partially or completely overlooked in assays and in the database and drill core was not sampled if no visible ore grade lead was present in the drill core.

These latest assay results received by the Company continue to build on the robust findings previously reported and extend the known mineralisation below the lowest level of the historic Korsnäs mine and 1.5 kilometres to the northwest of the Korsnäs mine.

A summary of significant intersections is shown in Table 1 and a comprehensive list of results is included in the JORC Code, 2012 Edition – Table 1 at the end of this report. However, the following thick, high-grade results are worthy of highlighting:

- **KR-112: 26.1m @ 7,107 ppm TREO from 53.9m including 1.4m @ 13,272 ppm TREO from 75.7m**
- **KR-157: 16.1m @ 6,388 ppm TREO from 124.9m including 2.2m @ 27,311 ppm TREO from 135.9m**
- **KR-160: 28.0m @ 5,617 ppm TREO from 183.0m including 2.0m @ 36,408 ppm TREO from 183.0m and 2.0m @ 11,343 ppm TREO from 207.0m**
- **KR-178: 8.8m @ 14,223 ppm TREO from 126.7m including 4.3m @ 26,630 ppm TREO from 126.7m**
- **KR-180: 11.0m @ 7,321 ppm TREO from 53.0m including 2.0m @ 28,818 ppm TREO from 60.0m**
- **KR-180: 12.3m @ 9,493 ppm TREO from 138.7m including 6.9m @ 13,441 ppm TREO from 141.7m**
- **KR-186: 24.0m at 17,649 ppm TREO from 37.2m including 7.3m @ 49,324 ppm TREO from 37.2m (15,926 ppm NdPr oxide)**
- **KR-189: 31.7m @ 8,068 ppm TREO from 41.5m including 11.1m @ 11,133 ppm TREO from 49.8m**
- **KR-284: 5.2m @ 12,736 ppm TREO from 7.00m**

These results are best comprehended through a series of cross-sections depicted in Figures 2 through 9, which traverse the mine from south to north. Overall, these findings demonstrate that the geological structure hosting the previously exploited lead mineralisation remains abundantly mineralised in REEs, even in the absence of lead.

In addition to the assay results reporting thick, high-grade intersections in the drill core tested, the following holes are of particular interest:

- **KR-186: 24.0m at 17,649 ppm TREO from 37.2m including 7.3m @ 49,324 ppm TREO from 37.2m (15,926 ppm NdPr oxide)**

Hole KR-186 (depicted in Figure 2), situated southward along the strike from the mine, yielded an exceptional intersection featuring very high grades of economically significant Neodymium and Praseodymium (**NdPr**), which are deemed critical "magnet rare earth elements". An assay result of 15,926 ppm (1.59%) is the highest grade of NdPr oxide so far obtained on the property.

- **KR-214: 4.6m @ 45,674 ppm TREO from 365.5m**

Another highly notable result is from hole KR-214, which intersected the mine structure 260 metres below the deepest mining levels (Figure 6). Importantly, KR-214 encountered high-grade rare earths, marking the deepest intersection observed thus far and showcasing the excellent depth potential for REE mineralisation at Korsnäs.

- **KR-251: 8.1m @ 10,075 ppm TREO from 73.0m**

Located approximately 1.5 kilometres northwest of Korsnäs, KR-251 tested one of at least four known mineralised structures interpreted to run near-parallel to the mine structure. The findings from hole KR-251 confirm the potential for this target to contain high-grade REE mineralisation (Figure 9). Additional sampling of holes from other historic sites drilled into this target has been conducted, and we eagerly anticipate the results.

John Levings, Executive Director of Prospech, remarks; *"The reported results further validate the presence of multiple high-grade REE mineralisation targets at Korsnäs. Particularly, these findings shed light on the potential of the mine structure itself in both dip and strike dimensions. Achieving record-high assays of the critical magnet REEs Neodymium and Praseodymium is exceptionally promising to the project's economics."*

While the sampling of historical core samples is largely completed, we are still awaiting a substantial number of assay results.

We also advise that all of the Tailings Storage Facility drill samples (refer ASX announcement dated 13 March 2024) have been delivered to the laboratory for assaying and an additional GTK core sampling program will commence in mid-April."

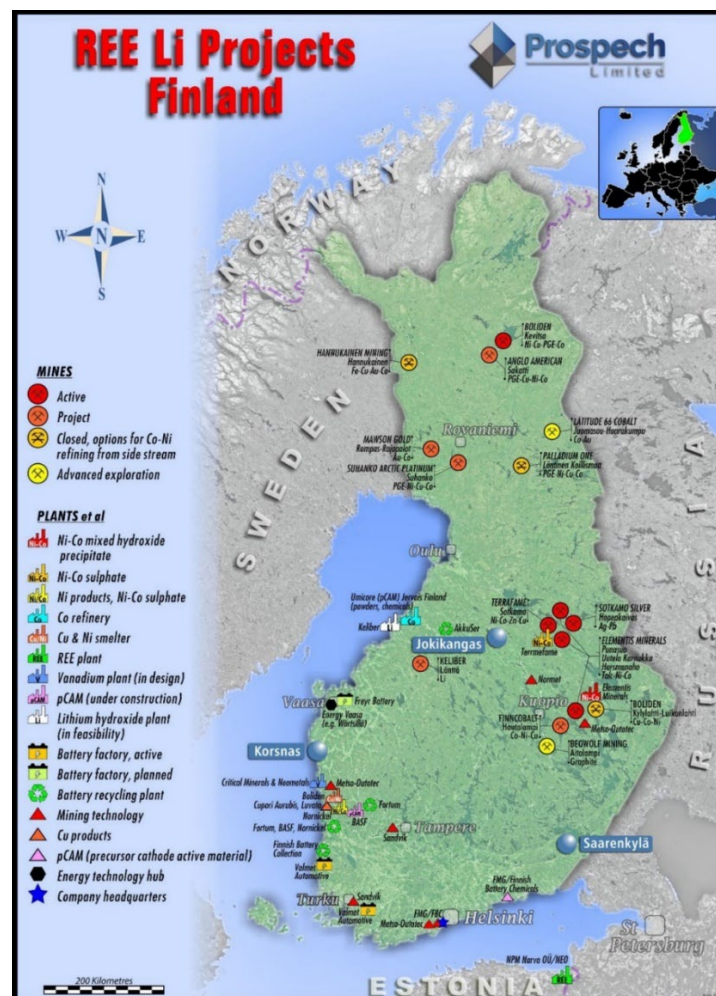


Figure 1: Korsnäs is located near an area geologically rich in critical minerals in Finland and proximate to the Neo Materials refining facility in Estonia.

Hole_Id	From m	To m	Thick m	TREO ppm	NdPr oxide ppm
KR-026	69.75	71.75	2.00	6,813	1,522
KR-026	69.75	70.70	0.95	11,152	2,225
KR-027	34.00	35.00	1.00	14,669	2,778
KR-027	211.60	216.33	4.73	4,344	1,196
KR-030	136.57	138.14	1.57	4,345	1,094
KR-062	135.66	138.24	2.58	7,623	1,934
KR-062	137.39	138.24	0.85	14,996	4,050
KR-063	44.50	46.80	2.30	6,612	1,843
KR-063	79.10	86.10	3.20	3,359	906
KR-063	110.94	115.70	4.76	3,138	924
KR-063	133.90	136.00	2.10	3,396	886
KR-066	136.12	138.15	2.03	3,101	732
KR-084	27.80	33.91	6.11	4,631	1,127
KR-084	99.65	116.55	16.90	4,442	1,172
KR-091A	49.30	50.00	0.70	12,310	2,924
KR-091B	64.30	65.91	1.61	5,466	1,260
KR-099	76.50	78.30	1.80	4,381	1,011
KR-099	169.20	178.00	8.80	4,777	855
KR-099	175.00	175.90	0.90	27,537	4,380
KR-112	53.87	80.00	26.13	7,107	1,982
KR-112	75.70	77.09	1.39	13,272	3,791
KR-118	130.00	132.00	2.00	12,051	2,072
KR-120	20.90	22.00	1.10	5,493	1,467
KR-120	47.60	50.60	3.00	3,204	727
KR-120	143.85	147.06	3.21	4,756	1,287
KR-120-A	18.45	21.55	3.10	15,664	4,449
KR-157	124.89	141.00	16.11	6,388	1,913
KR-157	135.90	138.10	2.20	27,311	8,391
KR-160	19.50	20.50	1.00	15,173	2,471
KR-160	183.00	211.00	28.00	5,617	1,330
KR-160	183.00	185.00	2.00	36,408	6,648
KR-160	207.00	209.00	2.00	11,343	3,366
KR-161	45.00	47.00	2.00	4,873	700
KR-175	154.30	155.36	1.06	26,150	7,971
KR-175	164.00	176.00	12.00	5,040	1,497
KR-175	164.00	165.00	1.00	13,331	4,060
KR-176	159.00	173.00	14.00	3,253	816
KR-176	187.75	191.00	3.25	6,149	1,669
KR-176	201.00	223.00	22.00	3,201	880
KR-176	201.00	202.00	1.00	14,149	4,068

Table 1: REE Intersections (TREO > 3,000 ppm and TREO x Thickness > 6,000 ppm.m).

Hole_Id	From m	To m	Thick m	TREO ppm	NdPr oxide ppm
KR-178	126.70	135.51	8.81	14,223	4,323
KR-178	126.70	131.00	4.30	26,630	8,173
KR-178	156.40	158.40	2.00	4,979	1,433
KR-180	53.00	64.00	11.00	7,321	1,994
KR-180	60.00	62.00	2.00	28,818	8,593
KR-180	138.70	151.00	12.30	9,493	2,790
KR-180	141.75	148.70	6.95	13,441	4,040
KR-180	154.00	156.00	2.00	3,117	652
KR-181	61.06	63.06	2.00	6,776	1,877
KR-186	37.17	61.20	24.03	17,649	5,568
KR-186	37.17	44.45	7.28	49,324	15,926
KR-189	41.55	73.22	31.67	8,068	1,511
KR-189	43.55	44.58	1.03	12,692	3,649
KR-189	49.85	61.00	11.15	11,133	2,026
KR-189	66.70	67.70	1.00	17,722	2,582
KR-189	70.90	71.90	1.00	49,557	8,166
KR-190	14.15	15.00	0.85	33,832	10,587
KR-190	18.00	21.00	3.00	5,946	1,662
KR-190	19.00	20.00	1.00	10,086	2,832
KR-214	139.20	159.50	20.30	3,999	1,094
KR-214	196.90	202.90	6.00	4,227	1,128
KR-214	356.50	361.10	4.60	45,674	7,296
KR-249	27.90	36.50	8.60	4,670	1,295
KR-249	97.73	105.15	7.42	7,990	2,453
KR-249	97.73	98.78	1.05	10,428	3,069
KR-249	104.61	105.15	0.54	14,650	4,799
KR-251	73.00	81.10	8.10	10,075	3,006
KR-251	73.00	76.90	3.90	16,062	4,829
KR-251	79.78	81.10	1.32	12,538	3,773
KR-263	125.30	132.80	7.50	5,673	1,627
KR-263	127.30	129.30	2.00	10,744	3,258
KR-268	158.75	164.60	5.85	4,174	1,215
KR-282	17.50	20.50	3.00	3,654	619
KR-284	7.00	12.20	5.20	12,736	2,066
KR-284	7.00	9.00	2.00	17,247	2,737
KR-284	11.00	12.20	1.20	24,762	4,072
KR-284	91.70	93.80	2.10	9,406	1,507
KR-284	92.80	93.80	1.00	11,026	1,784
KR-284	168.66	169.66	1.00	23,545	6,507
KR-302	15.10	31.75	16.65	4,233	1,164

Table 1 (continued): REE Intersections (TREO > 3,000ppm and TREO x Thickness > 6,000 ppm.m).

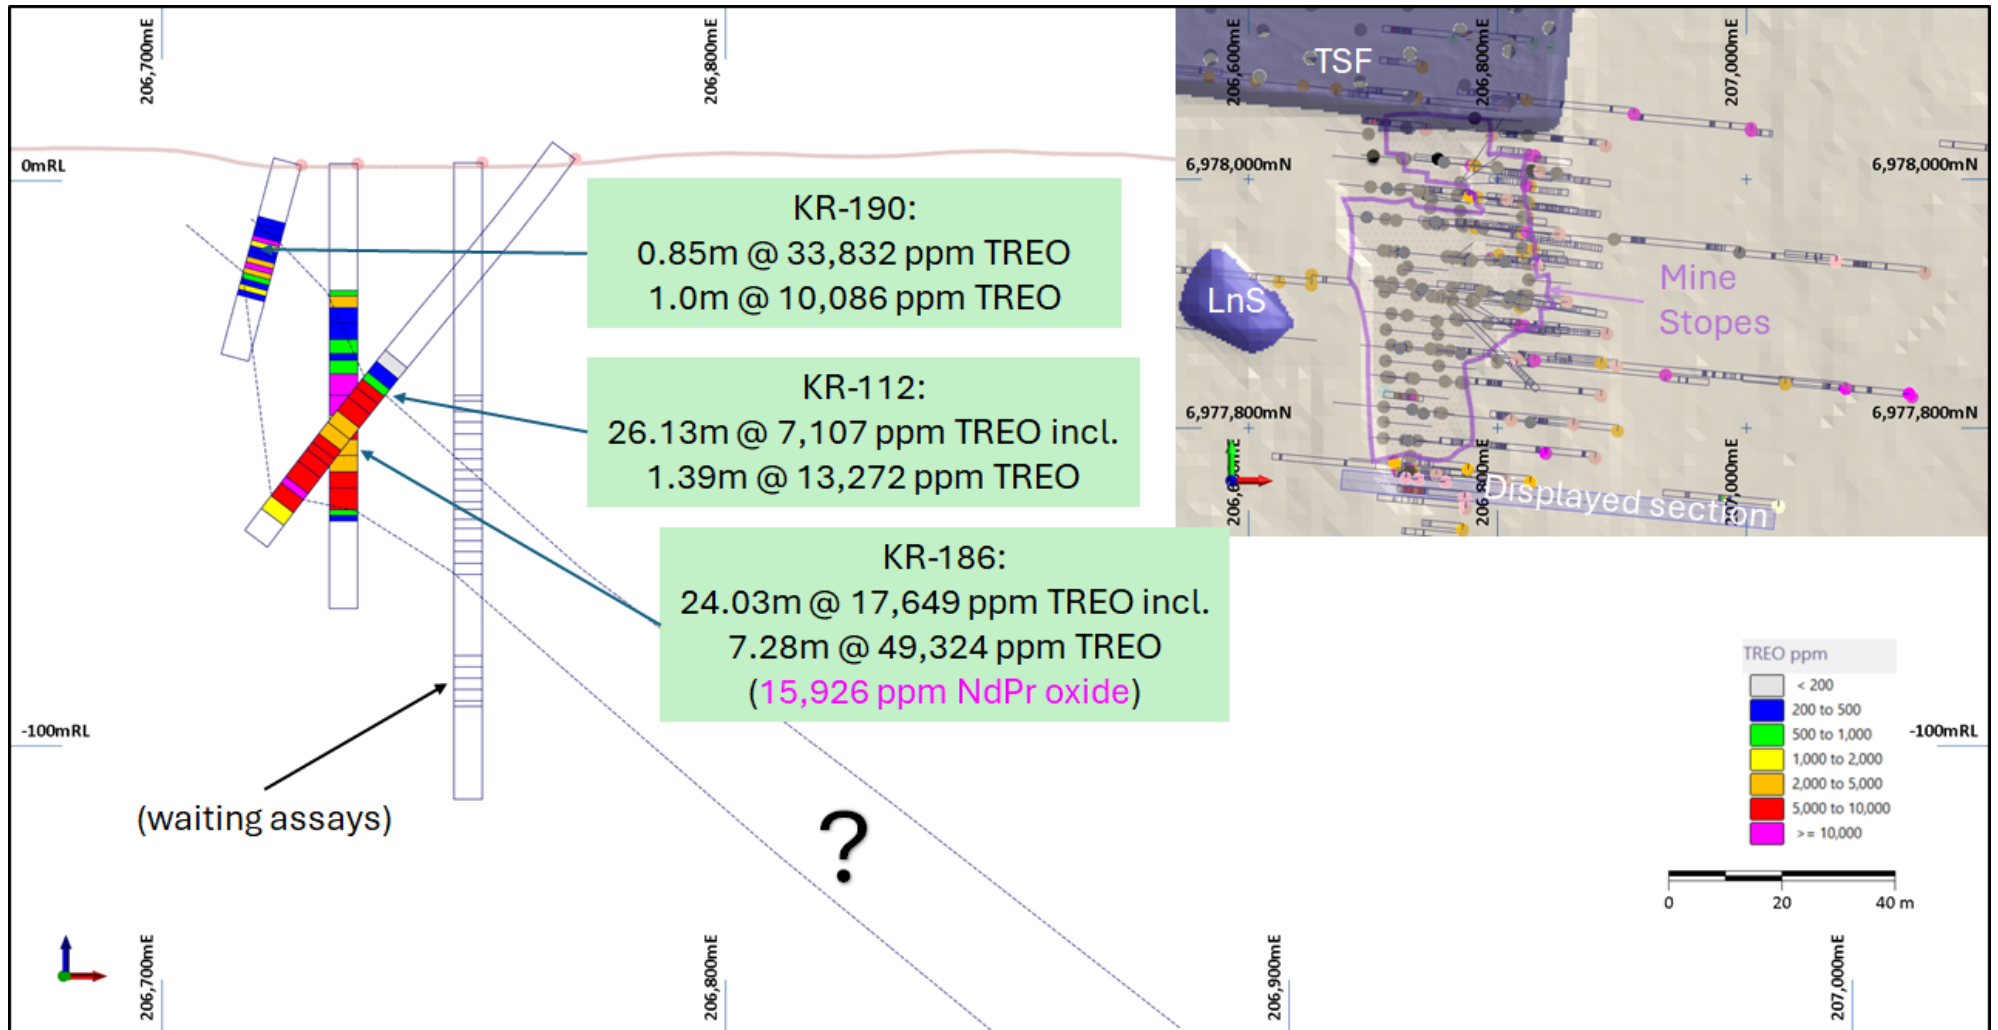


Figure 2: Korsnäs Mine area cross section showing high-grade TREO intersections of recently assayed historic drill core. In particular this section contains hole KR-186 which assays a record high grade of NdPr oxide. The position of the section can be seen in the inset which also shows the Tailings Storage Facility (TSF), footprint of the mine stopes and Lanthanide Storage Stockpile (LnS).

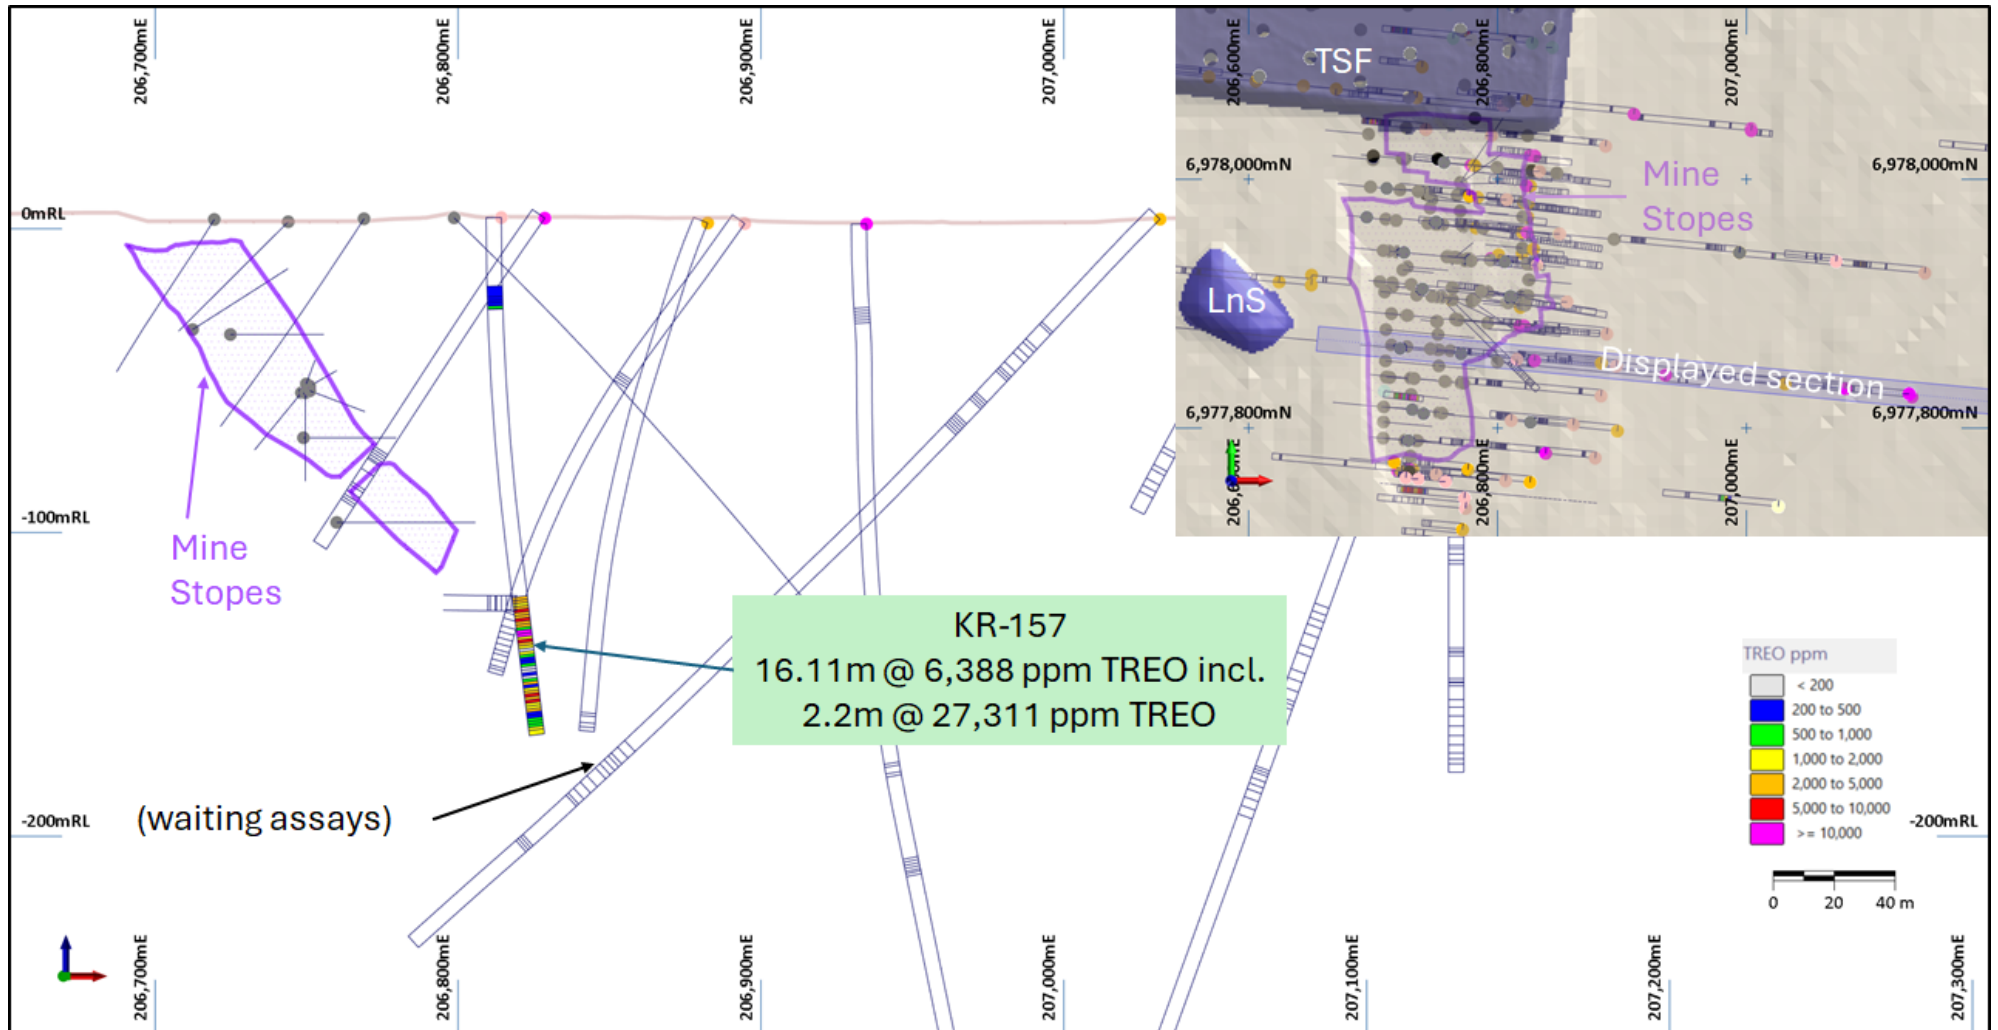


Figure 3: Korsnäs Mine area cross section showing high-grade TREO intersections of recently assayed historic drill core. The position of this section which contains hole KR-157 can be seen in the inset which also shows the Tailings Storage Facility (TSF), footprint of the mine stopes and Lanthanide Storage Stockpile (LnS).

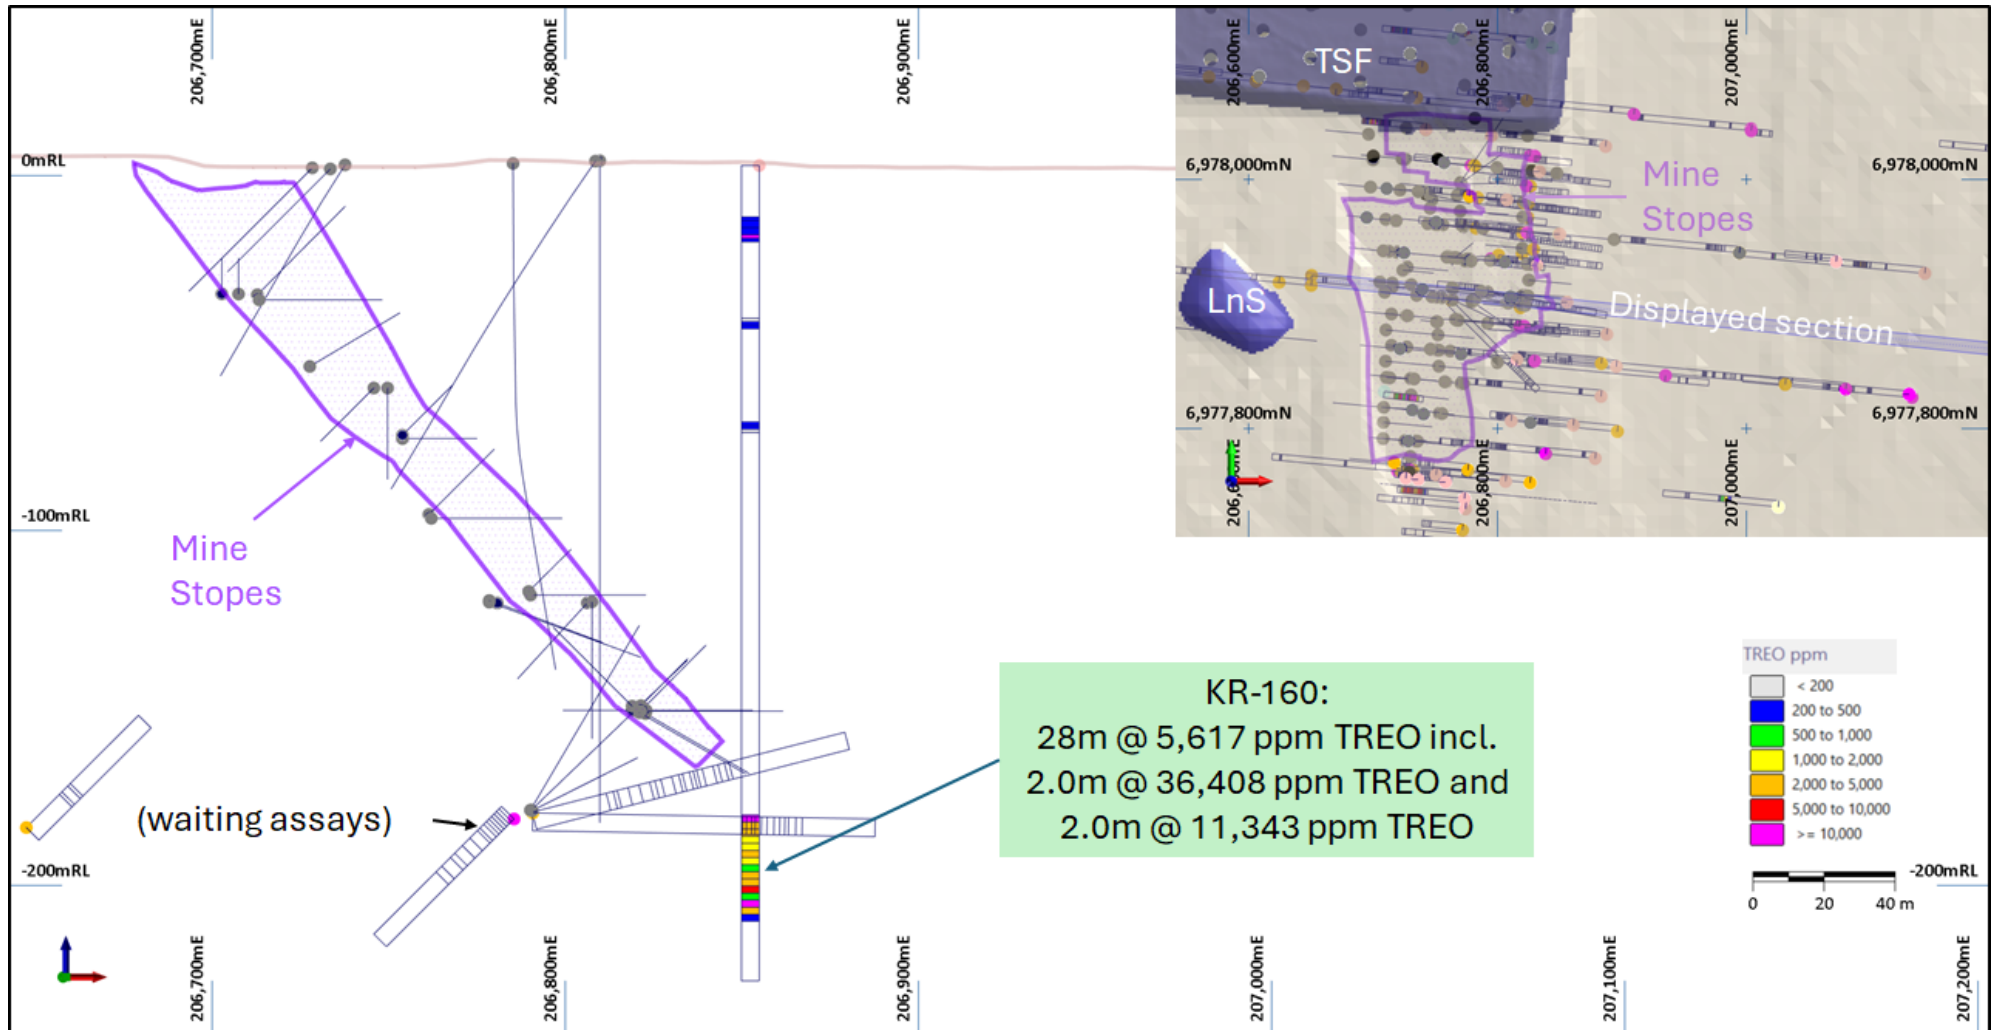


Figure 4: Korsnäs Mine area cross section showing high-grade TREO intersections of recently assayed historic drill core. The position of this section which contains hole KR-160 can be seen in the inset which also shows the Tailings Storage Facility (TSF), footprint of the mine stopes and Lanthanide Storage Stockpile (LnS).

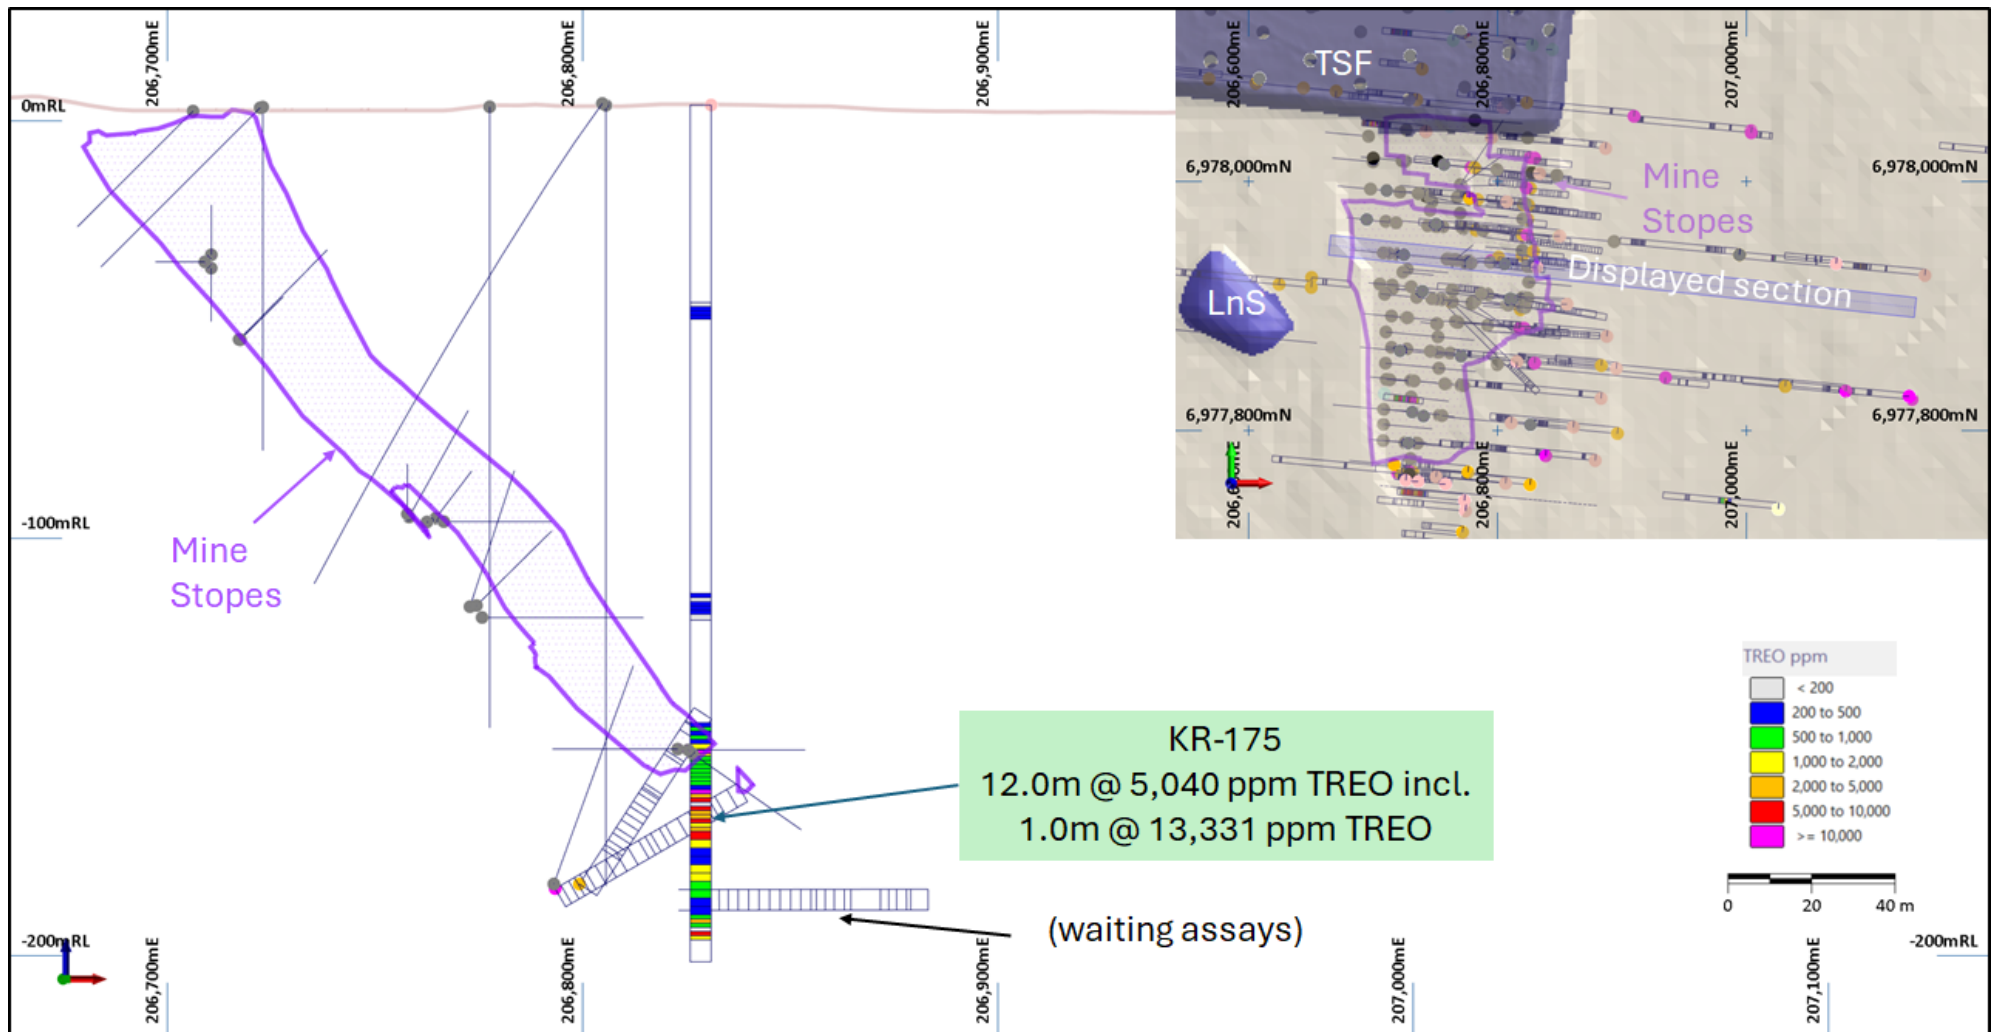


Figure 5: Korsnäs Mine area cross section showing high-grade TREO intersections of recently assayed historic drill core. The position of this section which contains hole KR-175 can be seen in the inset which also shows the Tailings Storage Facility (TSF), footprint of the mine stopes and Lanthanide Storage Stockpile (LnS).

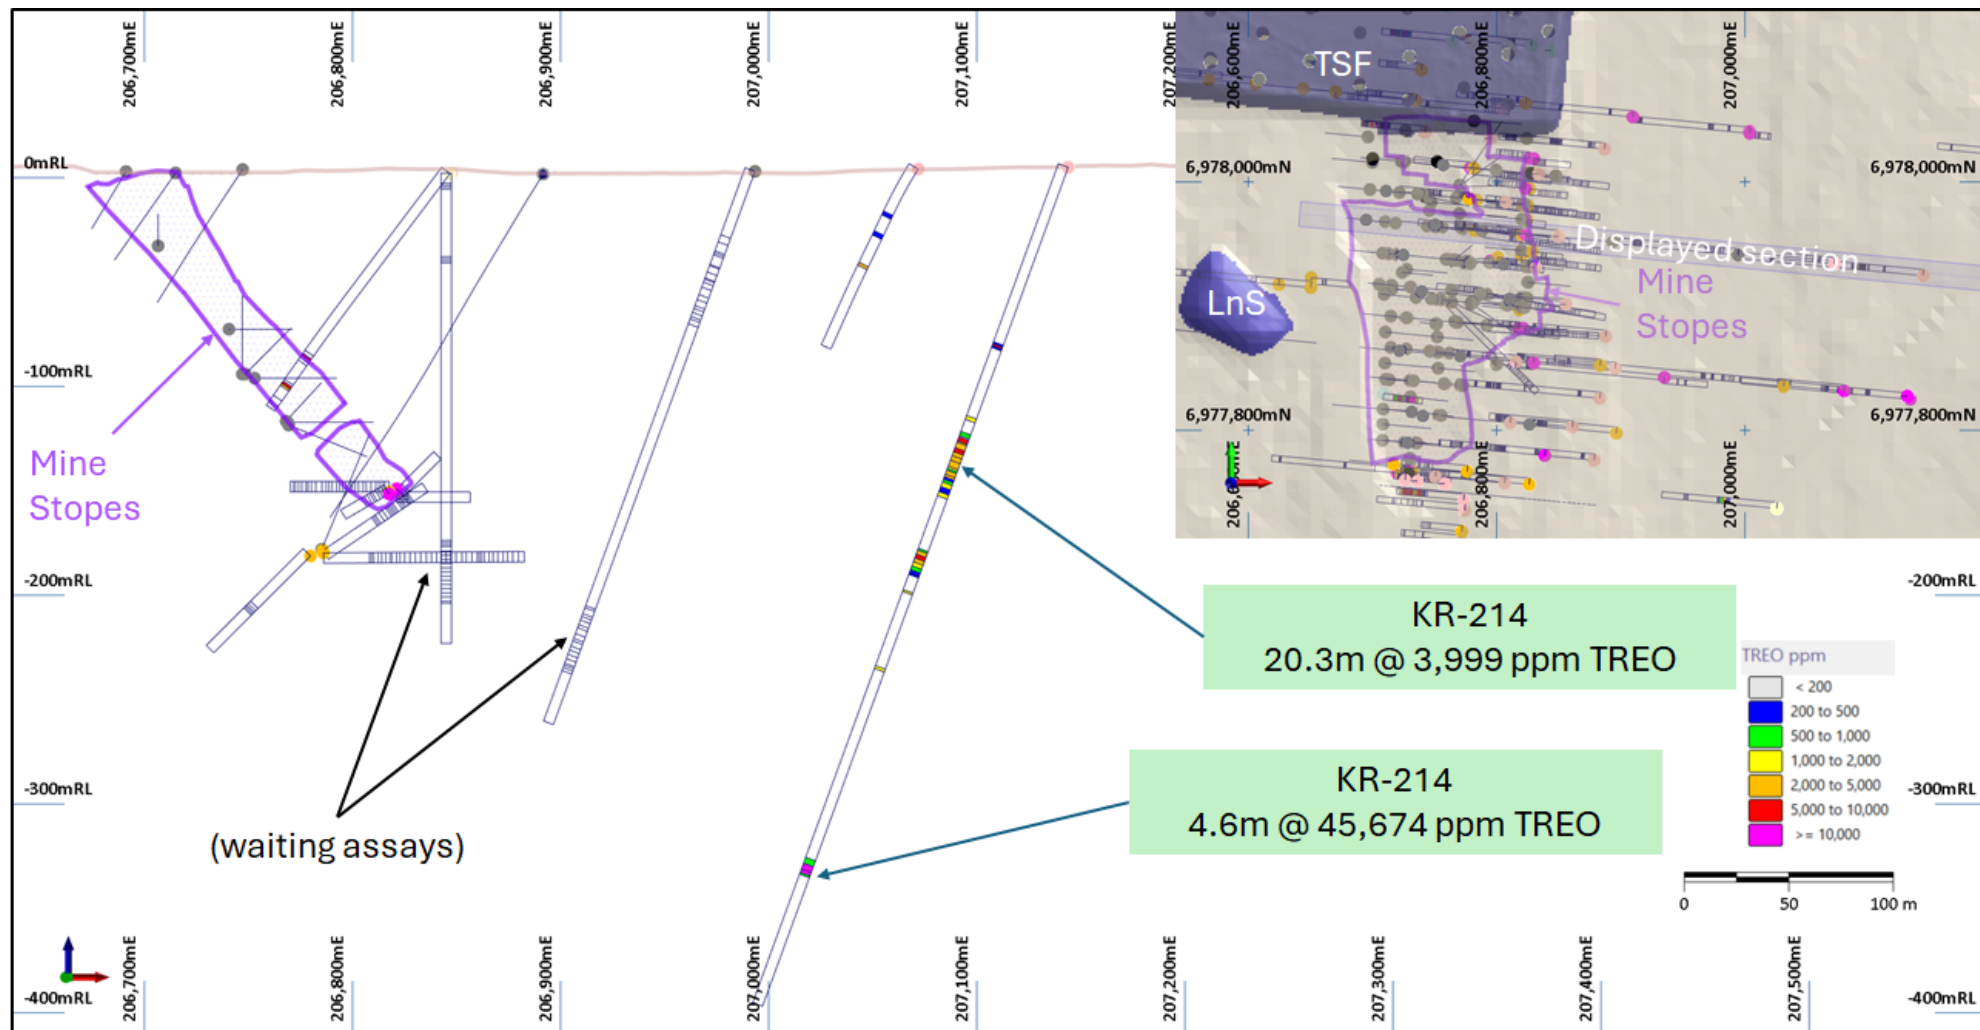


Figure 6: Korsnäs Mine area cross section showing high-grade TREO intersections of recently assayed historic drill core.
The position of this section which contains hole KR-214, showing that mineralisation occurs at least 260 metres down-dip from the lowest mine workings, can be seen in the inset which also shows the Tailings Storage Facility (TSF), footprint of the mine stopes and Lanthanide Storage Stockpile (LnS).

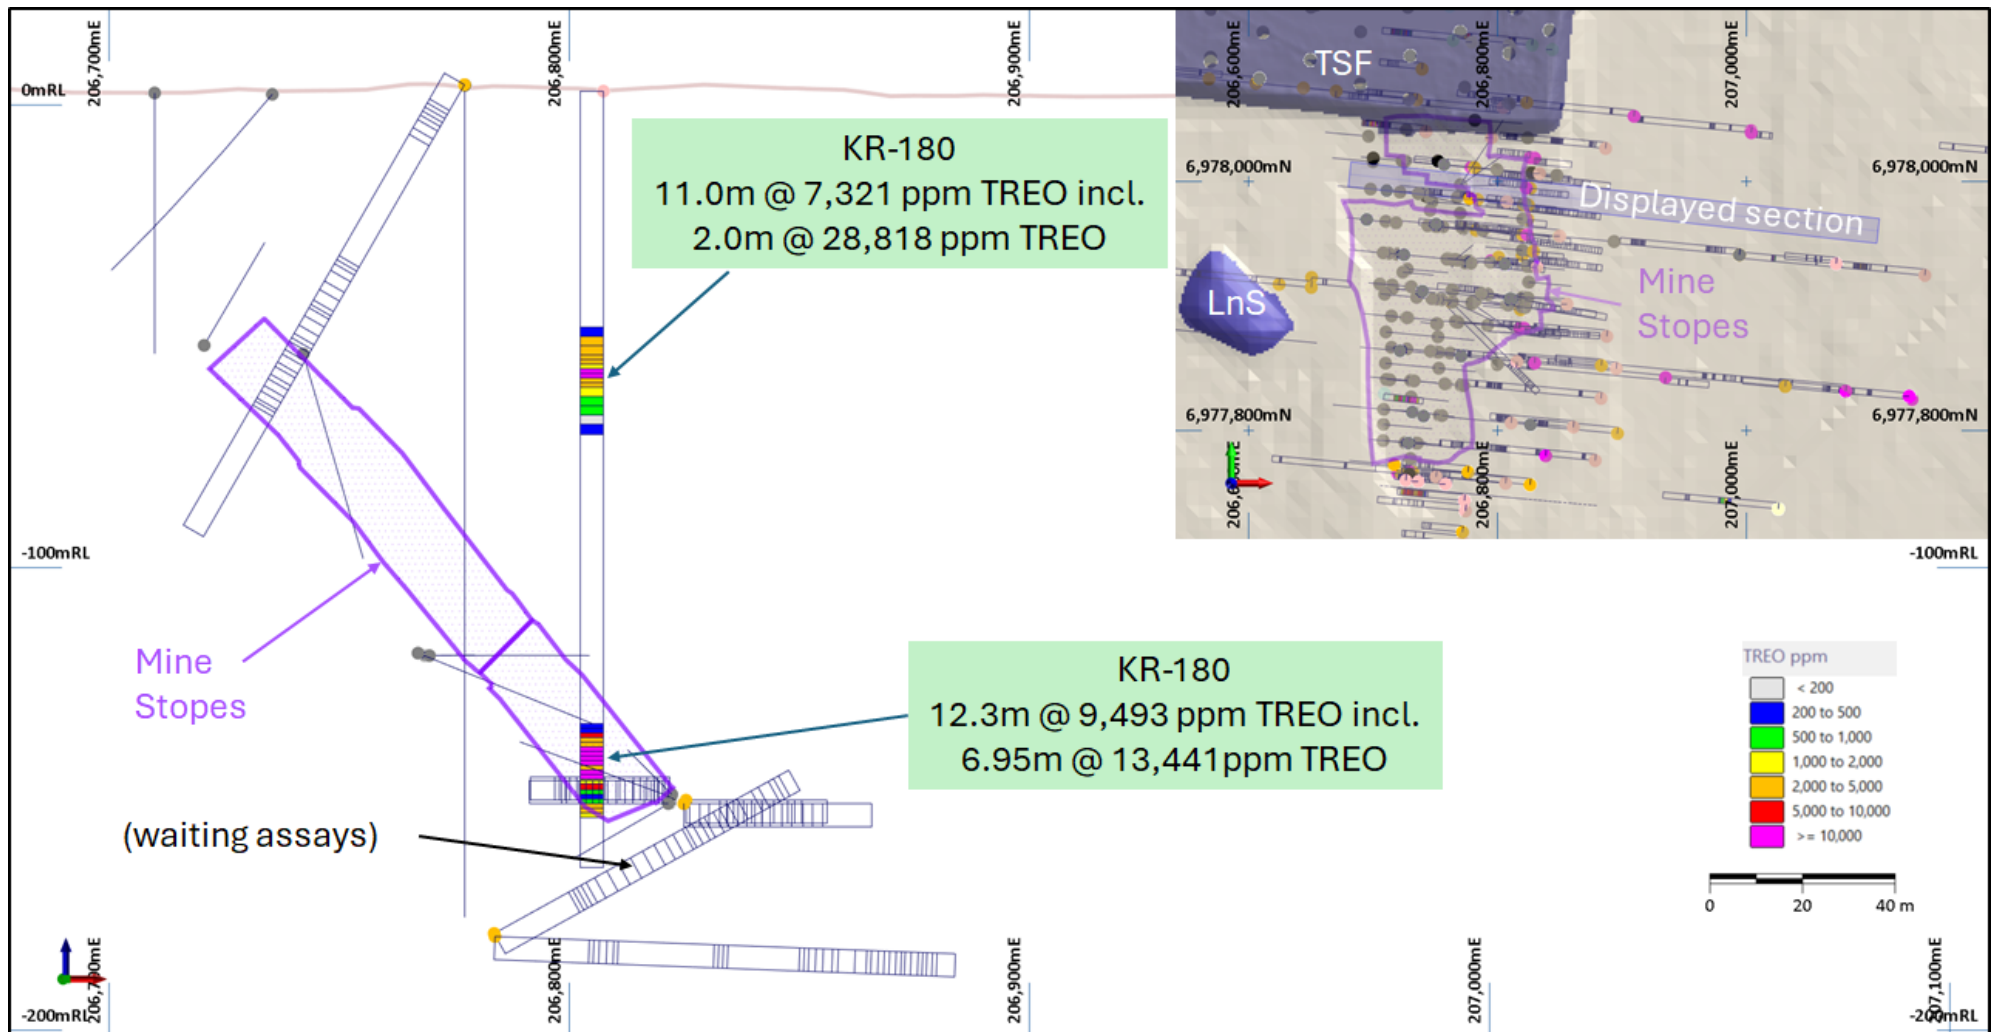


Figure 7: Korsnäs Mine area cross section showing high-grade TREO intersections of recently assayed historic drill core. The position of this section which contains hole KR-180 can be seen in the inset which also shows the Tailings Storage Facility (TSF), footprint of the mine stopes and Lanthanide Storage Stockpile (LnS).

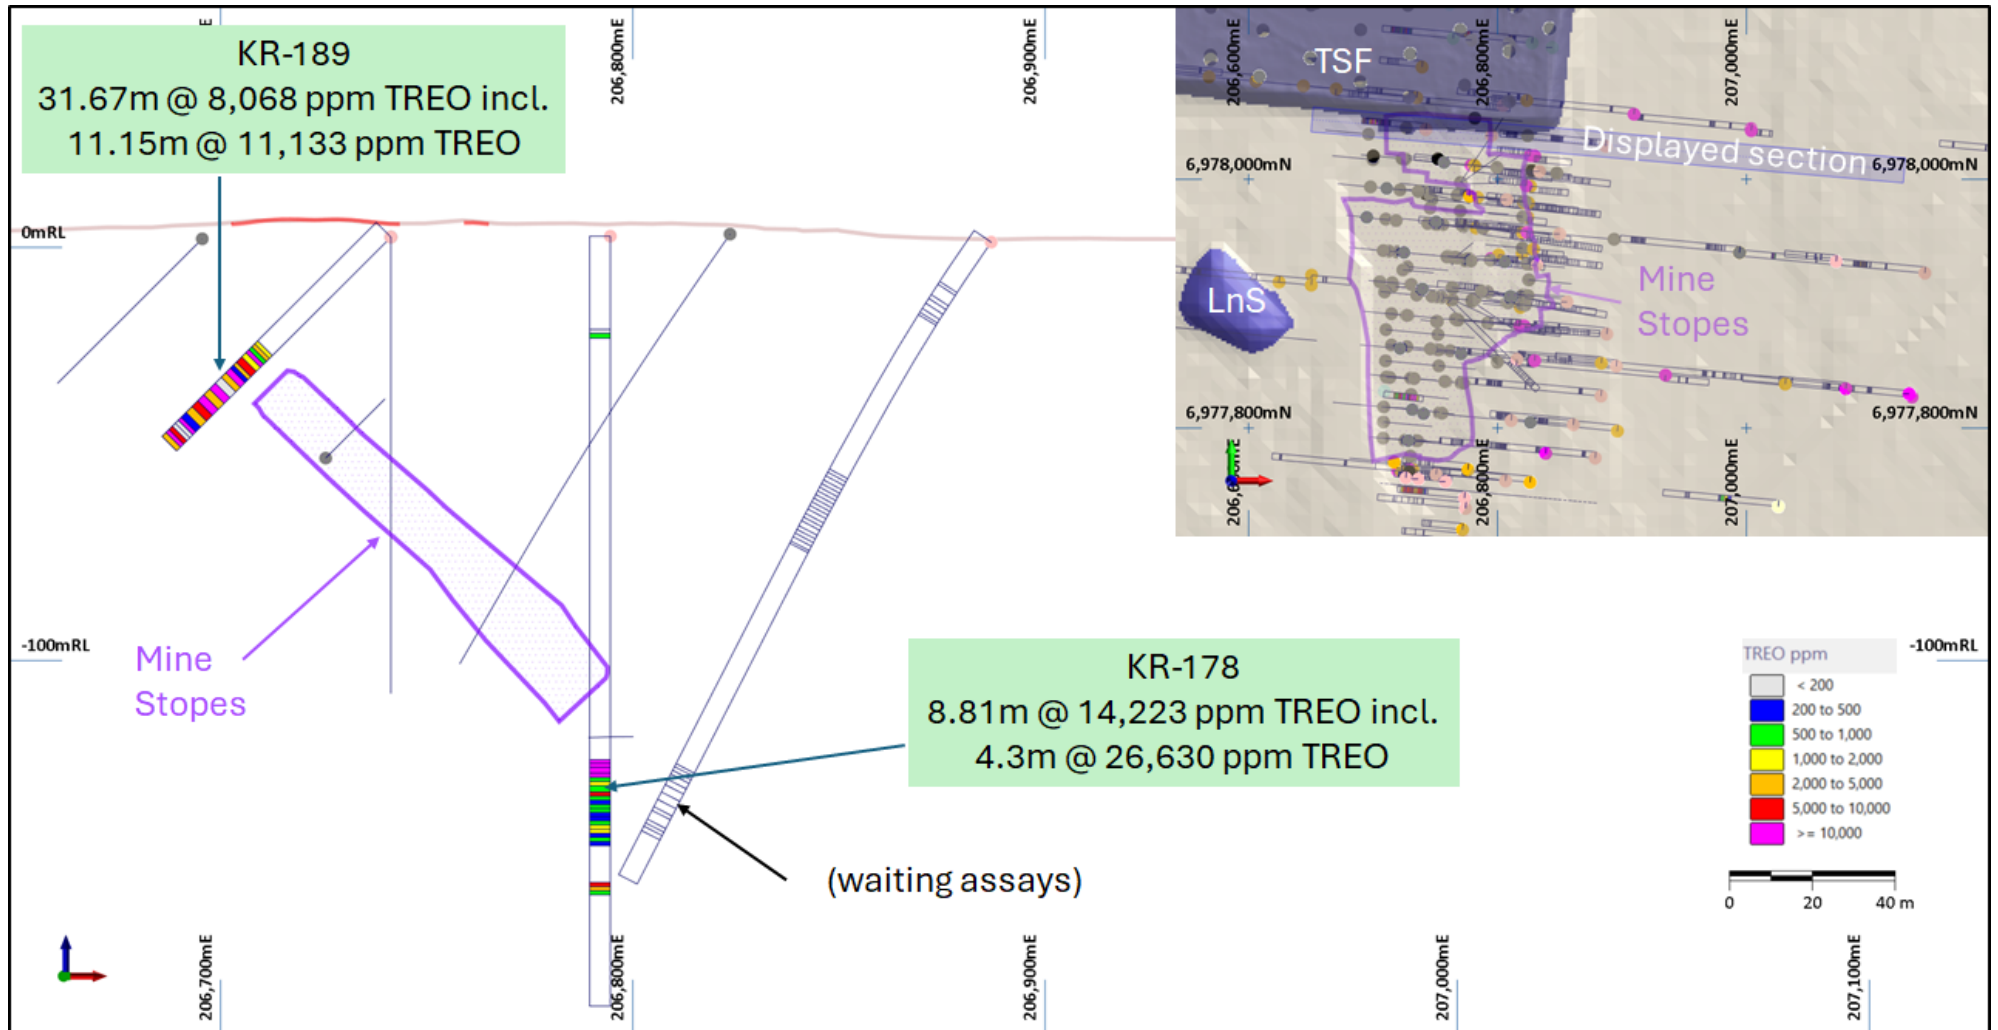


Figure 8: Korsnäs Mine area cross section showing high-grade TREO intersections of recently assayed historic drill core. The position of this section which contains hole KR-178 can be seen in the inset which also shows the Tailings Storage Facility (TSF), footprint of the mine stopes and Lanthanide Storage Stockpile (LnS).

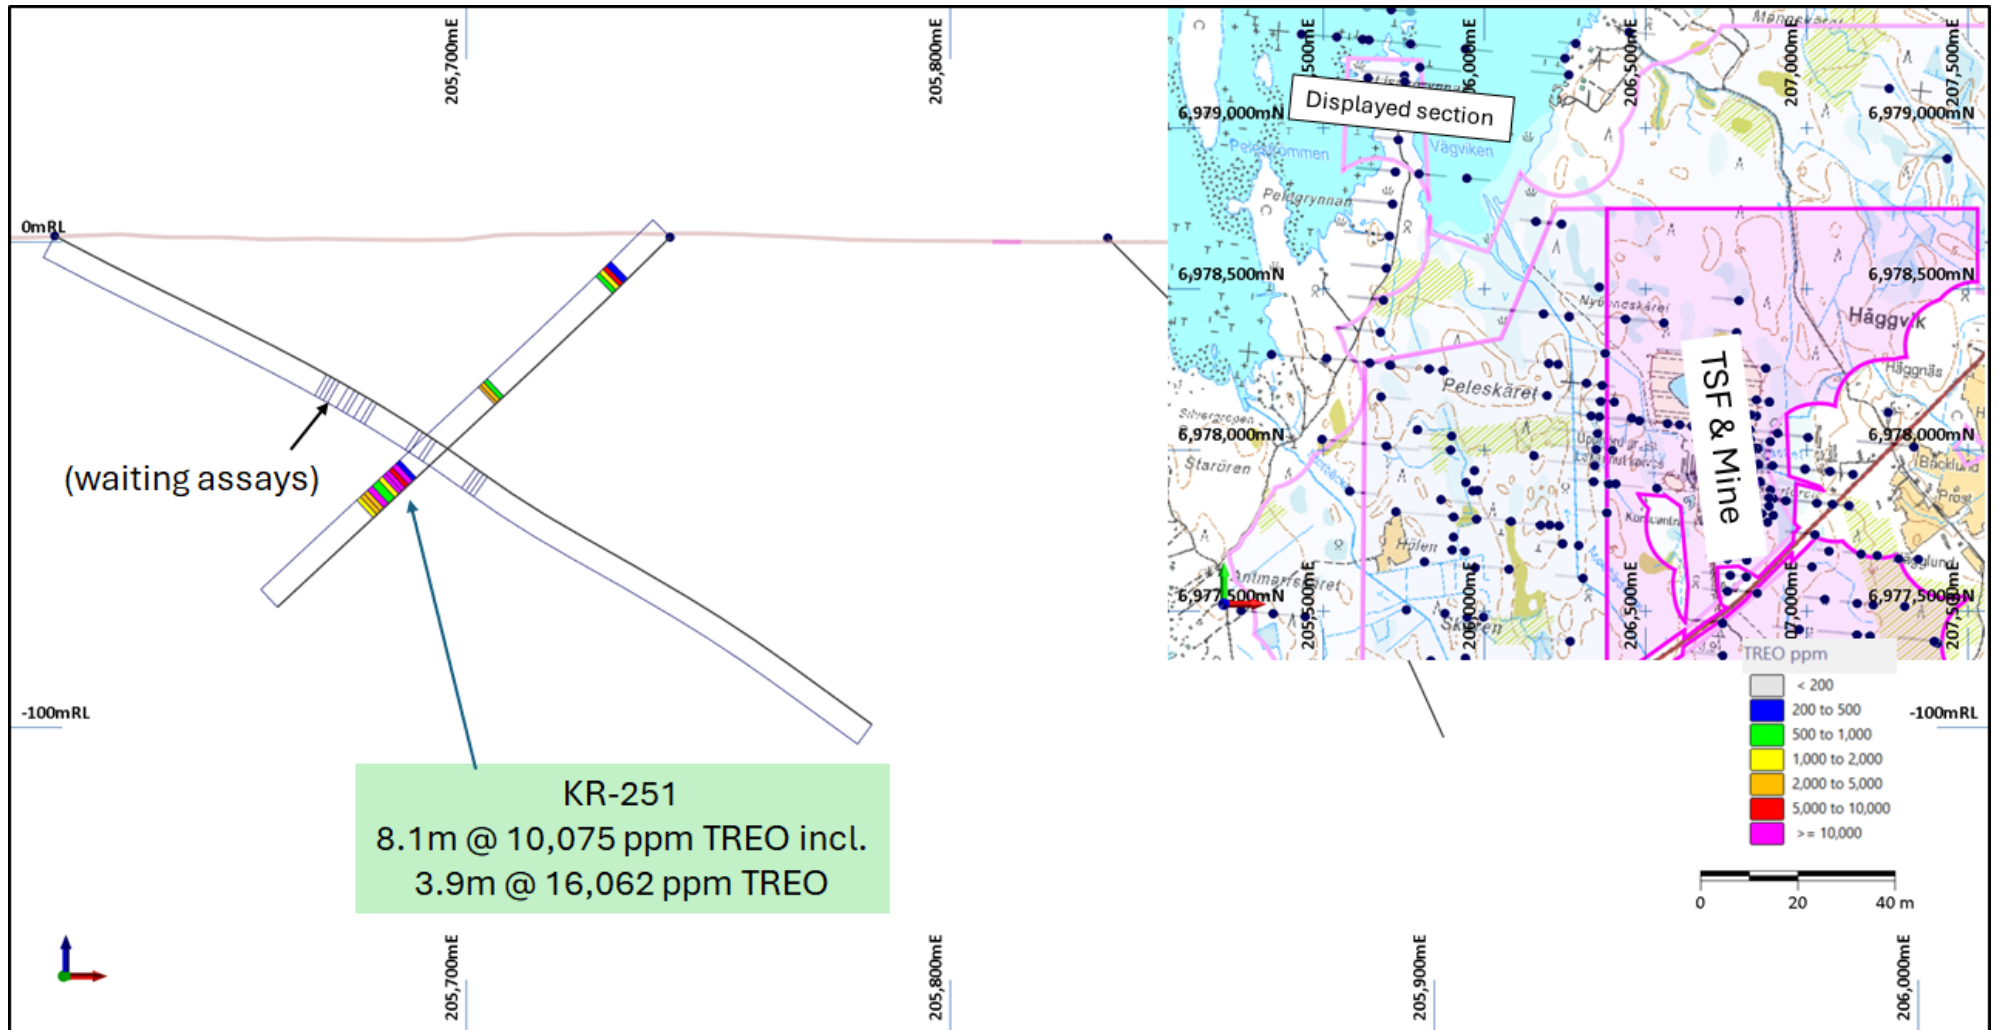


Figure 9: Cross Section showing the results of KR-251 which tested the promising Far Far West target, approximately 1.5 kilometres NW of the Korsnäs mine. Far Far west is one of at least four parallel mineralised structures on the property.

About Prospech Limited

Founded in 2014, the Company engages in mineral exploration in Slovakia and Finland, with the goal of discovering, defining, and developing critical elements such as rare earths, lithium, cobalt, copper, silver, and gold resources.

Prospech is taking steps to be a part of the mobility revolution and energy transition in Europe. The Company has a portfolio of prospective cobalt and precious metals projects in Slovakia and through its acquisition of the Finland Projects is in the process of acquiring prospective rare earth element (REE) and lithium projects. Eastern and Northern Europe are areas that are highly supportive of mining and have a growing demand for locally sourced rare earths and lithium. With the demand for these minerals increasing, Prospech is positioning itself to be a major player in the European market.

For further information, please contact:

Jason Beckton
Managing Director
Prospech Limited
+61 (0)438 888 612

This announcement has been authorised for release to the market by the Managing Director.

Competent Person's Statement

The information in this Report that relates to Exploration Results is based on information compiled by Mr Jason Beckton, who is a Member of the Australian Institute of Geoscientists. Mr Beckton, who is Managing Director of the Company, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Beckton consents to the inclusion in this Report of the matters based on the information in the form and context in which it appears.

pjn12129

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	The Finnish government facility in Loppi houses the historical core from the Korsnäs project. The core is of BQ and AQ sizes. Prospech sampling was conducted consistently within the specified intervals. For cores that were never sampled before, a ½-core sampling method was used, while for cores that had been previously sampled, a ¼-core sampling method was employed.
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Small diameter diamond drilling – approximately AQ and BQ size.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	Historic Core preserved at government GTK facility in Loppi.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i>	The complete core is to be relogged.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	½ or ¼ core cut with a thin diamond blade (due to the small diameter of the core). At this early stage no QC samples have been collected.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	Samples are stored in the Loppi relogging facility. Core in good condition. Assays will be carried out by ALS, an internationally certified laboratory. Historic assays obtained from paper logs have no record of the analytical methods used nor any record of QAQC procedures. However, where we have modern assays covering the same intervals as the historic assays, the agreement is good. (e.g, historic assay: KR-289: 18.5m @ 11,100 ppm TREO from 51.85m vs. modern assay: 18.3m @ 13,201 ppm TREO from 51.7m). In the coming months there will be many more modern assays available, which will allow a better comparison.

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i>	N/A.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i>	Hole locations determined from historical records and converted to ETRS-TM35FIN projection (EPSG:3067).
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	Only visible lead mineralisation was historically assayed. Prospech is targeting broader zones of REE mineralisation.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	No bias is believed to be introduced by the sampling method.
Sample security	<i>The measures taken to ensure sample security.</i>	Samples were collected by GTK personnel, bagged and immediately dispatched to the laboratory by independent courier.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits or reviews of the data management system have been carried out.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</i>	Prospech Limited has 100% interest in Bambra Oy ('Bambra'), a company incorporated in Finland. The laws of Finland relating to exploration and mining have various requirements. As the exploration advances specific filings and environmental or other studies may be required. There are ongoing requirements under Finnish mining laws that will be required at each stage of advancement. Those filings and studies are maintained and updated as required by Prospech's environmental and permit advisors specifically engaged for such purposes. The Company is the manager of operations in accordance with generally accepted mining industry standards and practices. The Korsnäs project's tenure is secured by Exploration Permit Application Number ML2021:0019 Hägg and Reservation Notification VA2023:0040 Hägg 2.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The area of Korsnäs has been mapped, glacial till boulder sampled and drilled by private companies including and Outokumpu Oy.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	45 degree dipping carbonate veins and anti-skarn selvages within sub-horizontally foliated metamorphic terrain.

Criteria	JORC Code explanation	Commentary																																																																																																																																																																																																																																																																																																																																																																		
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Drill Hole Collar Information ETRS-TM35FIN projection (EPSG:3067). Table of collar specifications below:																																																																																																																																																																																																																																																																																																																																																																		
	<table><tr><th>Hole_ID</th><th>East (m)</th><th>North (m)</th><th>RL (m)</th><th>Depth (m)</th><th>Azimuth (deg)</th><th>Dip (deg)</th></tr><tr><td>KR-026</td><td>206556.65</td><td>6978394.61</td><td>4.49</td><td>200.80</td><td>275.30</td><td>-40.00</td></tr><tr><td>KR-027</td><td>206437.66</td><td>6978406.44</td><td>4.02</td><td>236.52</td><td>275.30</td><td>-40.00</td></tr><tr><td>KR-028</td><td>206183.23</td><td>6978422.99</td><td>1.39</td><td>205.35</td><td>275.30</td><td>-40.00</td></tr><tr><td>KR-030</td><td>206793.74</td><td>6977259.39</td><td>1.50</td><td>227.66</td><td>275.30</td><td>-58.00</td></tr><tr><td>KR-035</td><td>206798.72</td><td>6977258.93</td><td>2.84</td><td>158.65</td><td>95.30</td><td>-52.00</td></tr><tr><td>KR-036</td><td>206728.65</td><td>6977166.18</td><td>1.79</td><td>135.10</td><td>275.30</td><td>-90.00</td></tr><tr><td>KR-040</td><td>206490.58</td><td>6977187.93</td><td>2.58</td><td>174.61</td><td>-</td><td>-90.00</td></tr><tr><td>KR-062</td><td>206767.66</td><td>6977162.04</td><td>1.45</td><td>173.93</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-063</td><td>206402.96</td><td>6978149.28</td><td>5.17</td><td>166.25</td><td>275.30</td><td>-39.00</td></tr><tr><td>KR-064</td><td>206456.61</td><td>6978099.64</td><td>4.00</td><td>199.56</td><td>95.30</td><td>-45.00</td></tr><tr><td>KR-066</td><td>206331.19</td><td>6978106.14</td><td>5.10</td><td>176.16</td><td>95.30</td><td>-42.00</td></tr><tr><td>KR-084</td><td>206827.77</td><td>6978109.37</td><td>3.80</td><td>121.48</td><td>275.30</td><td>-54.00</td></tr><tr><td>KR-087</td><td>206766.31</td><td>6978190.49</td><td>2.80</td><td>103.40</td><td>275.30</td><td>-57.00</td></tr><tr><td>KR-088</td><td>206764.14</td><td>6978166.17</td><td>2.90</td><td>80.64</td><td>275.30</td><td>-54.00</td></tr><tr><td>KR-091A</td><td>206773.84</td><td>6978260.34</td><td>2.72</td><td>78.55</td><td>275.30</td><td>-53.00</td></tr><tr><td>KR-091B</td><td>206773.84</td><td>6978260.34</td><td>2.72</td><td>158.34</td><td>275.30</td><td>-53.00</td></tr><tr><td>KR-095</td><td>206480.85</td><td>6978091.15</td><td>3.90</td><td>151.96</td><td>275.30</td><td>-54.00</td></tr><tr><td>KR-099</td><td>207155.86</td><td>6977426.15</td><td>3.92</td><td>193.11</td><td>275.30</td><td>-48.00</td></tr><tr><td>KR-112</td><td>206773.39</td><td>6977743.70</td><td>3.87</td><td>87.63</td><td>275.30</td><td>-54.00</td></tr><tr><td>KR-118</td><td>205581.35</td><td>6977872.82</td><td>3.59</td><td>157.18</td><td>95.30</td><td>-50.00</td></tr><tr><td>KR-120</td><td>206884.08</td><td>6978149.43</td><td>1.93</td><td>221.62</td><td>275.30</td><td>-55.00</td></tr><tr><td>KR-120-A</td><td>206884.08</td><td>6978149.43</td><td>1.93</td><td>35.78</td><td>275.30</td><td>-55.00</td></tr><tr><td>KR-152</td><td>207072.17</td><td>6977933.96</td><td>4.10</td><td>95.85</td><td>275.30</td><td>-58.00</td></tr><tr><td>KR-157</td><td>206815.57</td><td>6977855.24</td><td>3.70</td><td>170.67</td><td>275.30</td><td>-90.00</td></tr><tr><td>KR-160</td><td>206855.87</td><td>6977901.42</td><td>2.86</td><td>229.74</td><td>-</td><td>-90.00</td></tr><tr><td>KR-161</td><td>206810.98</td><td>6977806.12</td><td>3.32</td><td>128.60</td><td>275.30</td><td>-85.00</td></tr><tr><td>KR-175</td><td>206831.71</td><td>6977931.11</td><td>3.80</td><td>205.26</td><td>-</td><td>-90.00</td></tr><tr><td>KR-176</td><td>206804.50</td><td>6978059.28</td><td>3.00</td><td>232.53</td><td>-</td><td>-90.00</td></tr><tr><td>KR-178</td><td>206795.19</td><td>6978035.03</td><td>2.70</td><td>186.33</td><td>-</td><td>-90.00</td></tr><tr><td>KR-180</td><td>206807.47</td><td>6977983.63</td><td>3.00</td><td>167.82</td><td>-</td><td>-90.00</td></tr><tr><td>KR-181</td><td>206738.65</td><td>6977462.43</td><td>2.00</td><td>167.82</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-184</td><td>206753.94</td><td>6977561.50</td><td>4.25</td><td>121.26</td><td>275.30</td><td>-50.00</td></tr><tr><td>KR-186</td><td>206736.24</td><td>6977759.14</td><td>3.00</td><td>78.68</td><td>-</td><td>-90.00</td></tr><tr><td>KR-189</td><td>206742.39</td><td>6978039.96</td><td>2.50</td><td>73.22</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-190</td><td>206726.27</td><td>6977760.07</td><td>2.75</td><td>35.90</td><td>275.30</td><td>-75.00</td></tr><tr><td>KR-197</td><td>207056.82</td><td>6977533.19</td><td>4.20</td><td>184.57</td><td>-</td><td>-90.00</td></tr><tr><td>KR-214</td><td>207143.41</td><td>6977924.56</td><td>4.96</td><td>427.53</td><td>275.30</td><td>-70.00</td></tr><tr><td>KR-249</td><td>205723.94</td><td>6978863.81</td><td>0.40</td><td>200.24</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-250</td><td>205733.25</td><td>6978963.44</td><td>1.00</td><td>127.17</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-251</td><td>205742.57</td><td>6979063.07</td><td>1.00</td><td>111.08</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-252</td><td>206750.65</td><td>6977762.81</td><td>2.03</td><td>74.00</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-263</td><td>206878.51</td><td>6977775.99</td><td>2.75</td><td>150.10</td><td>275.30</td><td>-50.00</td></tr><tr><td>KR-268</td><td>206887.83</td><td>6977875.62</td><td>1.51</td><td>166.64</td><td>275.30</td><td>-55.00</td></tr><tr><td>KR-282</td><td>206754.29</td><td>6977661.97</td><td>3.32</td><td>100.00</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-283</td><td>206762.59</td><td>6977610.95</td><td>4.22</td><td>100.78</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-284</td><td>206812.40</td><td>6977606.29</td><td>4.27</td><td>200.60</td><td>275.30</td><td>-45.00</td></tr><tr><td>KR-301</td><td>205900.00</td><td>6977690.00</td><td>2.00</td><td>39.10</td><td>276.00</td><td>-60.00</td></tr><tr><td>KR-302</td><td>205940.00</td><td>6977686.00</td><td>2.00</td><td>33.10</td><td>276.00</td><td>-60.00</td></tr><tr><td>KR-303</td><td>205904.00</td><td>6977730.00</td><td>2.00</td><td>21.10</td><td>276.00</td><td>-60.00</td></tr></table>						Hole_ID	East (m)	North (m)	RL (m)	Depth (m)	Azimuth (deg)	Dip (deg)	KR-026	206556.65	6978394.61	4.49	200.80	275.30	-40.00	KR-027	206437.66	6978406.44	4.02	236.52	275.30	-40.00	KR-028	206183.23	6978422.99	1.39	205.35	275.30	-40.00	KR-030	206793.74	6977259.39	1.50	227.66	275.30	-58.00	KR-035	206798.72	6977258.93	2.84	158.65	95.30	-52.00	KR-036	206728.65	6977166.18	1.79	135.10	275.30	-90.00	KR-040	206490.58	6977187.93	2.58	174.61	-	-90.00	KR-062	206767.66	6977162.04	1.45	173.93	275.30	-45.00	KR-063	206402.96	6978149.28	5.17	166.25	275.30	-39.00	KR-064	206456.61	6978099.64	4.00	199.56	95.30	-45.00	KR-066	206331.19	6978106.14	5.10	176.16	95.30	-42.00	KR-084	206827.77	6978109.37	3.80	121.48	275.30	-54.00	KR-087	206766.31	6978190.49	2.80	103.40	275.30	-57.00	KR-088	206764.14	6978166.17	2.90	80.64	275.30	-54.00	KR-091A	206773.84	6978260.34	2.72	78.55	275.30	-53.00	KR-091B	206773.84	6978260.34	2.72	158.34	275.30	-53.00	KR-095	206480.85	6978091.15	3.90	151.96	275.30	-54.00	KR-099	207155.86	6977426.15	3.92	193.11	275.30	-48.00	KR-112	206773.39	6977743.70	3.87	87.63	275.30	-54.00	KR-118	205581.35	6977872.82	3.59	157.18	95.30	-50.00	KR-120	206884.08	6978149.43	1.93	221.62	275.30	-55.00	KR-120-A	206884.08	6978149.43	1.93	35.78	275.30	-55.00	KR-152	207072.17	6977933.96	4.10	95.85	275.30	-58.00	KR-157	206815.57	6977855.24	3.70	170.67	275.30	-90.00	KR-160	206855.87	6977901.42	2.86	229.74	-	-90.00	KR-161	206810.98	6977806.12	3.32	128.60	275.30	-85.00	KR-175	206831.71	6977931.11	3.80	205.26	-	-90.00	KR-176	206804.50	6978059.28	3.00	232.53	-	-90.00	KR-178	206795.19	6978035.03	2.70	186.33	-	-90.00	KR-180	206807.47	6977983.63	3.00	167.82	-	-90.00	KR-181	206738.65	6977462.43	2.00	167.82	275.30	-45.00	KR-184	206753.94	6977561.50	4.25	121.26	275.30	-50.00	KR-186	206736.24	6977759.14	3.00	78.68	-	-90.00	KR-189	206742.39	6978039.96	2.50	73.22	275.30	-45.00	KR-190	206726.27	6977760.07	2.75	35.90	275.30	-75.00	KR-197	207056.82	6977533.19	4.20	184.57	-	-90.00	KR-214	207143.41	6977924.56	4.96	427.53	275.30	-70.00	KR-249	205723.94	6978863.81	0.40	200.24	275.30	-45.00	KR-250	205733.25	6978963.44	1.00	127.17	275.30	-45.00	KR-251	205742.57	6979063.07	1.00	111.08	275.30	-45.00	KR-252	206750.65	6977762.81	2.03	74.00	275.30	-45.00	KR-263	206878.51	6977775.99	2.75	150.10	275.30	-50.00	KR-268	206887.83	6977875.62	1.51	166.64	275.30	-55.00	KR-282	206754.29	6977661.97	3.32	100.00	275.30	-45.00	KR-283	206762.59	6977610.95	4.22	100.78	275.30	-45.00	KR-284	206812.40	6977606.29	4.27	200.60	275.30	-45.00	KR-301	205900.00	6977690.00	2.00	39.10	276.00	-60.00	KR-302	205940.00	6977686.00	2.00	33.10	276.00	-60.00	KR-303	205904.00	6977730.00	2.00	21.10	276.00	-60.00
Hole_ID	East (m)	North (m)	RL (m)	Depth (m)	Azimuth (deg)	Dip (deg)																																																																																																																																																																																																																																																																																																																																																														
KR-026	206556.65	6978394.61	4.49	200.80	275.30	-40.00																																																																																																																																																																																																																																																																																																																																																														
KR-027	206437.66	6978406.44	4.02	236.52	275.30	-40.00																																																																																																																																																																																																																																																																																																																																																														
KR-028	206183.23	6978422.99	1.39	205.35	275.30	-40.00																																																																																																																																																																																																																																																																																																																																																														
KR-030	206793.74	6977259.39	1.50	227.66	275.30	-58.00																																																																																																																																																																																																																																																																																																																																																														
KR-035	206798.72	6977258.93	2.84	158.65	95.30	-52.00																																																																																																																																																																																																																																																																																																																																																														
KR-036	206728.65	6977166.18	1.79	135.10	275.30	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-040	206490.58	6977187.93	2.58	174.61	-	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-062	206767.66	6977162.04	1.45	173.93	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-063	206402.96	6978149.28	5.17	166.25	275.30	-39.00																																																																																																																																																																																																																																																																																																																																																														
KR-064	206456.61	6978099.64	4.00	199.56	95.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-066	206331.19	6978106.14	5.10	176.16	95.30	-42.00																																																																																																																																																																																																																																																																																																																																																														
KR-084	206827.77	6978109.37	3.80	121.48	275.30	-54.00																																																																																																																																																																																																																																																																																																																																																														
KR-087	206766.31	6978190.49	2.80	103.40	275.30	-57.00																																																																																																																																																																																																																																																																																																																																																														
KR-088	206764.14	6978166.17	2.90	80.64	275.30	-54.00																																																																																																																																																																																																																																																																																																																																																														
KR-091A	206773.84	6978260.34	2.72	78.55	275.30	-53.00																																																																																																																																																																																																																																																																																																																																																														
KR-091B	206773.84	6978260.34	2.72	158.34	275.30	-53.00																																																																																																																																																																																																																																																																																																																																																														
KR-095	206480.85	6978091.15	3.90	151.96	275.30	-54.00																																																																																																																																																																																																																																																																																																																																																														
KR-099	207155.86	6977426.15	3.92	193.11	275.30	-48.00																																																																																																																																																																																																																																																																																																																																																														
KR-112	206773.39	6977743.70	3.87	87.63	275.30	-54.00																																																																																																																																																																																																																																																																																																																																																														
KR-118	205581.35	6977872.82	3.59	157.18	95.30	-50.00																																																																																																																																																																																																																																																																																																																																																														
KR-120	206884.08	6978149.43	1.93	221.62	275.30	-55.00																																																																																																																																																																																																																																																																																																																																																														
KR-120-A	206884.08	6978149.43	1.93	35.78	275.30	-55.00																																																																																																																																																																																																																																																																																																																																																														
KR-152	207072.17	6977933.96	4.10	95.85	275.30	-58.00																																																																																																																																																																																																																																																																																																																																																														
KR-157	206815.57	6977855.24	3.70	170.67	275.30	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-160	206855.87	6977901.42	2.86	229.74	-	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-161	206810.98	6977806.12	3.32	128.60	275.30	-85.00																																																																																																																																																																																																																																																																																																																																																														
KR-175	206831.71	6977931.11	3.80	205.26	-	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-176	206804.50	6978059.28	3.00	232.53	-	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-178	206795.19	6978035.03	2.70	186.33	-	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-180	206807.47	6977983.63	3.00	167.82	-	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-181	206738.65	6977462.43	2.00	167.82	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-184	206753.94	6977561.50	4.25	121.26	275.30	-50.00																																																																																																																																																																																																																																																																																																																																																														
KR-186	206736.24	6977759.14	3.00	78.68	-	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-189	206742.39	6978039.96	2.50	73.22	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-190	206726.27	6977760.07	2.75	35.90	275.30	-75.00																																																																																																																																																																																																																																																																																																																																																														
KR-197	207056.82	6977533.19	4.20	184.57	-	-90.00																																																																																																																																																																																																																																																																																																																																																														
KR-214	207143.41	6977924.56	4.96	427.53	275.30	-70.00																																																																																																																																																																																																																																																																																																																																																														
KR-249	205723.94	6978863.81	0.40	200.24	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-250	205733.25	6978963.44	1.00	127.17	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-251	205742.57	6979063.07	1.00	111.08	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-252	206750.65	6977762.81	2.03	74.00	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-263	206878.51	6977775.99	2.75	150.10	275.30	-50.00																																																																																																																																																																																																																																																																																																																																																														
KR-268	206887.83	6977875.62	1.51	166.64	275.30	-55.00																																																																																																																																																																																																																																																																																																																																																														
KR-282	206754.29	6977661.97	3.32	100.00	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-283	206762.59	6977610.95	4.22	100.78	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-284	206812.40	6977606.29	4.27	200.60	275.30	-45.00																																																																																																																																																																																																																																																																																																																																																														
KR-301	205900.00	6977690.00	2.00	39.10	276.00	-60.00																																																																																																																																																																																																																																																																																																																																																														
KR-302	205940.00	6977686.00	2.00	33.10	276.00	-60.00																																																																																																																																																																																																																																																																																																																																																														
KR-303	205904.00	6977730.00	2.00	21.10	276.00	-60.00																																																																																																																																																																																																																																																																																																																																																														
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	A minimum sample length is 1m generally but can be as low as 0.15m is observed in historical sampling.																																																																																																																																																																																																																																																																																																																																																																		

Criteria		JORC Code explanation										Commentary																											
Relationship between mineralisation widths and intercept lengths		These relationships are particularly important in the reporting of Exploration Results.										In general the holes have intersected the mineralised zone nearly normal to the host structure – any exceptions to this are noted individually.																											
		If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.																																					
		If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').																																					
Diagrams		Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.										The location and results received for surface samples are displayed in the attached maps and/or tables. Coordinates are ETRS-TM35FIN projection (EPSG:3067).																											
Balanced reporting		Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.										Results for all samples collected in the past are displayed on the attached maps and the table below.																											
Hole ID	From m	To m	Thick m	TREO ppm	TREO x Thick ppm.m	NdPr oxide ppm	La2O3 ppm	CeO2 ppm	Pr6011 ppm	Nd203 ppm	Sm203 ppm	Eu203 ppm	Gd203 ppm	Tb407 ppm	Dy203 ppm	Ho203 ppm	Er203 ppm	Tm203 ppm	Yb203 ppm	Lu203 ppm	Y203 ppm	LREO ppm	HREO ppm																
KR-026	26.00	27.20	1.20	3,527	4,232	879	747	1,566	182	697	106	25	55	5.5	21.2	3.2	7.4	0.8	4.7	0.6	104	3,379	148																
KR-026	48.61	51.30	2.69	1,996	5,369	409	518	931	94	315	41	10	20	2.3	9.4	1.6	3.6	0.5	3.0	0.4	46	1,929	67																
KR-026	60.30	64.60	4.30	2,555	10,987	492	721	1,150	112	380	52	13	26	3.1	14.0	2.4	5.6	0.8	4.4	0.6	71	2,454	102																
KR-026	69.75	71.75	2.00	6,813	13,626	1,522	1,685	3,149	337	1,185	164	39	77	7.9	29.8	4.2	8.3	0.9	5.3	0.6	120	6,636	177																
KR-026	69.75	70.70	0.95	11,152	10,594	2,225	3,050	5,354	528	1,697	194	45	84	8.3	31.3	4.8	8.8	1.0	6.0	0.8	140	10,952	201																
KR-026	77.00	78.45	1.45	2,343	3,397	485	598	1,057	108	377	51	11	28	3.3	15.4	2.7	6.4	0.8	4.1	0.6	80	2,230	113																
KR-026	180.90	181.55	0.65	8,604	5,593	2,307	1,724	3,758	465	1,842	282	62	144	14.1	51.8	7.8	15.8	1.9	9.3	1.3	225	8,278	327																
KR-027	19.95	21.00	1.05	3,595	3,775	857	863	1,572	184	673	95	24	51	5.2	19.1	2.8	6.2	0.7	4.0	0.7	95	3,461	134																
KR-027	34.00	47.00	13.00	2,925	38,025	637	715	1,364	146	491	60	15	34	3.5	14.5	2.2	5.1	0.7	3.8	0.5	71	2,824	101																
KR-027	34.00	35.00	1.00	14,669	14,669	2,778	3,976	7,380	703	2,075	190	41	85	7.6	31.0	4.6	10.2	1.3	7.5	0.8	154	14,452	217																
KR-027	58.70	59.70	1.00	3,092	3,092	752	673	1,400	162	590	76	19	42	4.3	17.7	2.5	6.4	0.7	4.1	0.6	93	2,963	129																
KR-027	211.60	216.33	4.73	4,344	20,547	1,196	852	1,916	248	948	135	37	73	6.4	23.3	3.0	6.3	0.8	3.4	0.5	93	4,208	136																
KR-028	107.05	112.48	5.43	2,546	13,825	568	505	1,285	124	444	63	14	31	3.0	11.7	1.8	4.1	0.5	2.8	0.5	56	2,466	80																
KR-030	136.57	138.14	1.57	4,345	6,822	1,094	1,057	1,811	224	870	128	41	66	6.6	23.8	3.3	7.4	0.8	5.4	1.0	100	4,197	149																
KR-030	153.65	154.81	1.16	3,161	3,667	816	657	1,394	168	648	101	27	51	5.1	18.5	2.4	5.3	0.6	3.8	0.6	79	3,046	115																
KR-035	39.82	41.32	1.50	2,603	3,905	546	686	1,194	124	422	57	13	28	3.0	11.8	1.9	4.3	0.5	3.0	0.4	55	2,524	80																
KR-035	105.44	107.70	2.26	2,086	4,714	480	391	991	99	381	61	16	37	3.7	14.5	2.3	4.8	0.5	3.0	0.5	81	1,976	111																
KR-036	123.00	126.50	3.50	2,027	7,095	451	528	874	98	353	51	11	28	2.9	11.6	1.8	4.2	0.5	2.9	0.5	59	1,944	83																
KR-062	65.80	67.51	1.71	2,416	4,131	457	700	1,105	107	350	44	11	22	2.4	9.0	1.4	3.4	0.4	2.7	0.4	57	2,339	77																
KR-062	87.67	92.45	4.78	2,488	11,893	559	615	1,089	122	437	67	15	38	3.9	14.6	2.2	4.8	0.6	3.7	0.5	75	2,383	105																
KR-062	135.66	138.24	2.58	7,623	19,667	1,934	1,490	3,536	407	1,527	236	61	125	11.0	41.0	5.3	10.9	1.3	6.6	1.0	164	7,382	241																
KR-062	137.39	138.24	0.85	14,996	12,747	4,050	3,108	6,459	855	3,195	479	129	253	22.2	85.5	11.4	23.8	2.7	14.4	2.0	356	14,479	518																
KR-063	18.70	20.10	1.40	4,202	5,883	1,076	908	1,854	225	851	125	31	69	6.2	23.1	3.2	5.9	0.7	3.9	0.6	95	4,063	139																
KR-063	29.50	30.50	1.00	2,070	2,070	625	326	893	122	503	79	18	41	3.9	14.9	2.2	4.3	0.5	2.8	0.4	60	1,981	89																
KR-063	44.50	46.80	2.30	6,612	15,208	1,843	1,218	2,906	378	1,465	224	47	122	10.9	41.2	6.1	11.6	1.3	6.8	0.8	174	6,359	253																
KR-063	78.10	79.10	1.00	4,394	4,394	1,230	846	1,860	248	982	160	37	87	8.1	29.4	4.0	8.6	1.1	5.6	1.0	117	4,220	175																
KR-063	79.10	86.10	3.20	3,359	10,749	906	902	1,308	197	709	89	23	41	4.0	14.1	2.0	4.0	0.6	3.6	0.5	61	3,269	90																
KR-063	110.94	115.70	4.76	3,138	14,937	924	540	1,332	181	743	121	25	64	6.2	23.4	3.0	6.1	0.7	3.6	0.6	88	3,006	131																
KR-063	133.90	136.00	2.10	3,396	7,132	886	729	1,493	186	700	103	24	52	4.9	17.7	2.5	5.3	0.6	3.3	0.5	75	3,286	110																
KR-063	158.10	161.37	3.27	2,958	9,673	780	615	1,285	162	618	93	22	48	4.8	18.0	2.7	5.8	0.7	4.0	0.5	78	2,844	115																
KR-064	15.52	17.00	1.48	2,517	3,725	367	840	1,151	94	273	31	6	18	2.5	11.5	2.2	5.7	0.7	4.4	0.6	76	2,413	104																
KR-066	22.98	23.50	0.52	8,577	4,460	2,506	1,449	3,709	495	2,011	314	75	175	15.6	59.7	8.2	16.7	1.7	9.1	1.1	236	8,229	348																
KR-066	65.10	66.15	1.05	3,003	3,153	623	775	1,375	140	483	69	19	37	3.7	14.5	2.1	5.0	0.6	3.8	0.5	74	2,899	104																
KR-066	79.50	80.29	0.79	4,980	3,934	1,268	1,064	2,161	271	997	155	37	83	8.4	31.1	4.6	10.1	1.2	7.5	1.0	149	4,768	212																
KR-066	136.12	138.15	2.03	3,101	6,295	732	689	1,424	159	573	84	20	41	4.2	16.3	2.4	5.4	0.6	4.0	0.5	76	2,991	110																
KR-084	27.80	33.91	6.11	4,631	28,295	1,127	1,070	2,075	245	882	127	33	66	6.2	22.7	3.2	6.3	0.7	3.6	0.4	90	4,498	133																
KR-084	99.65	116.55	16.90	4,442	75,070	1,172	919	1,997	234	938	134	35	71	6.1	20.8	2.7	5.3	0.5	3.3	0.4	74	4,328	114																
KR-087	65.90	66.80	0.90	2,408	2,167	560	499	986	122	438	69	16	44	5.7	28.9	5.4	13.5	1.6	9.1	1.0	169	2,174	234																
KR-087	69.50	70.59	1.09	3,212	3,501	847	636	1,418	182	665	100	22	54	5.2	19.4	3.1	7.3	0.9	5.7	0.8	93	3,077	135																
KR-088	59.15	60.45	1.30	3,036	3,947	736	712	1,308	156	580	91	29	52	4.8	17.1	2.5	5.1	0.5	3.2	0.4	75	2,928	109																
KR-088	63.40	68.22	4.82	2,402	11,578	571	561	1,040	125	446	67	17	37	3.8	15.2	2.4	5.9	0.7	4.3	0.6	74	2,294	107																
KR-091A	49.30	50.00	0.70	12,310	8,617	2,924	2,956	5,121	598	2,326	339	113	198	20.0	89.4	14.7	35.2	3.7	21.2	2.8	472	11,651	659																
KR-091A	64.10	65.95	1.85	3,181	5,885	783	701	1,419	164	619	89	22	48	4.7	19.2	2.7	6.2	0.7	4.2	0.6	81	3,061	120																
KR-091B	50.20	51.05	0.85	3,384	2,876	887	780	1,357	176	711	106	34	64	6.3	24.0	3.7	7.4	0.8	4.7	0.5	108	3,228	155																
KR-091B	64.30	65.91	1.61	5,466	8,800	1,260	1,320	2,450	267	993	153	38	80	8.0	29.4	4.0	8.7	0.9	5.0	0.6	109	5,300	166																
KR-091B	72.66	73.20	0.54	5,102	2,755	1,204	1,214	2,296	255	949	129	28	68	6.4	25.8	3.8	8.5	1.0	6.0	0.9	110	4,939	163																
KR-095	34.40	49.60	15.20	2,135	32,452	500	480	951	109	391	62	15	33	3.3	13.8	2.2	5.2	0.6	3.6	0.5	66	2,040	96																
KR-095	92.50	93.90	1.40	3,722	5,211	978	779	1,652	208	770	115	28	58	5.1	18.1	2.6	5.6	0.6	3.1	0.4	77	3,609	113																
KR-099	10.10	11.10	1.00	2,527	2,527	648	542	1,104	137	511	77	18	41	3.9	15.6	2.2	4.3	0.5	3.2	0.5	67	2,429	97																
KR-099	17.80	18.74	0.94	2,052	1,929	449	537	892																															

Criteria			JORC Code explanation														Commentary									
Hole ID	From m	To m	Thick m	TREO	TREO x	NdPr	Light Rare Earth Oxides							Heavy Rare Earth Oxides										LREO	HREO	
				ppm	Thick ppm.m	oxide ppm	La2O3	CeO2	Pr6O11	Nd2O3	Sm2O3	Eu2O3	Gd2O3	Tb4O7	Dy2O3	Ho2O3	Er2O3	Tm2O3	Yb2O3	Lu2O3	Y2O3	ppm	ppm			
KR-157	124.89	141.00	16.11	6,388	102,911	1,913	1,010	2,762	377	1,536	248	58	139	12.9	46.2	6.2	12.3	1.3	6.5	0.8	172	6,129	259			
KR-157	135.90	138.10	2.20	27,311	60,084	8,391	4,111	11,660	1,634	6,757	1,111	262	640	59.5	210.1	27.9	54.5	5.5	27.0	3.2	749	26,175	1,136			
KR-157	153.00	163.00	10.00	2,837	28,370	816	501	1,214	165	651	106	24	56	5.4	20.2	2.8	6.0	0.7	3.6	0.5	80	2,718	119			
KR-160	19.50	20.50	1.00	15,173	15,173	2,471	4,844	7,552	646	1,825	144	22	47	3.9	13.3	1.8	4.7	0.5	3.8	0.5	65	15,080	93			
KR-160	183.00	211.00	28.00	5,617	157,277	1,330	1,315	2,606	293	1,037	138	31	67	6.2	21.9	3.2	6.6	0.7	4.3	0.6	87	5,486	131			
KR-160	183.00	185.00	2.00	36,408	72,816	6,648	10,803	18,236	1,715	4,932	405	63	109	9.3	26.1	3.3	7.3	0.7	3.9	0.5	93	36,264	144			
KR-160	207.00	209.00	2.00	11,343	22,687	3,366	1,924	4,851	661	2,705	441	105	242	21.6	75.0	10.6	19.8	2.1	11.4	1.5	273	10,928	415			
KR-161	45.00	47.00	2.00	4,873	9,746	700	1,670	2,398	192	509	37	6	14	2.0	6.1	1.1	2.9	0.4	2.6	0.3	32	4,826	47			
KR-161	95.80	127.36	31.56	2,787	87,952	740	554	1,227	150	590	88	21	47	4.6	16.2	2.4	5.8	0.6	3.9	0.5	76	2,676	110			
KR-175	154.30	155.36	1.06	26,150	27,719	7,971	3,930	11,101	1,570	6,401	1,068	256	624	59.2	211.8	29.6	57.3	6.0	31.3	3.8	800	24,950	1,199			
KR-175	164.00	176.00	12.00	5,040	60,480	1,497	819	2,171	295	1,202	198	45	107	9.8	35.7	4.7	9.7	1.0	5.7	0.7	137	4,836	204			
KR-175	164.00	165.00	1.00	13,331	13,331	4,060	2,094	5,747	807	3,253	515	115	282	26.2	94.7	12.1	23.7	2.6	12.8	1.5	344	12,813	518			
KR-175	195.00	196.00	1.00	2,080	2,080	562	405	907	112	450	69	17	39	3.5	13.1	1.6	3.8	0.5	3.1	0.5	55	1,999	81			
KR-175	198.00	199.00	1.00	5,156	5,156	1,331	1,073	2,327	275	1,056	155	35	78	7.2	26.4	3.4	7.4	0.8	4.9	0.6	105	5,000	156			
KR-176	150.00	154.00	4.00	2,484	9,936	628	515	1,117	133	495	74	17	37	3.6	13.7	2.0	4.8	0.6	3.6	0.5	67	2,388	96			
KR-176	159.00	173.00	14.00	3,253	45,542	816	702	1,457	170	646	93	23	50	4.6	17.2	2.5	5.1	0.6	3.6	0.5	79	3,341	113			
KR-176	184.00	185.00	1.00	2,087	2,087	515	455	938	112	403	61	14	31	3.0	10.9	1.6	3.8	0.4	2.6	0.4	50	2,015	72			
KR-176	187.75	191.00	3.25	6,149	19,984	1,669	1,145	2,737	349	1,320	210	49	110	10.2	38.1	5.2	10.6	1.2	7.0	0.9	157	5,919	230			
KR-176	201.00	223.00	22.00	3,201	70,422	880	576	1,402	181	699	115	28	63	5.8	21.8	3.1	6.3	0.7	4.1	0.6	94	3,065	136			
KR-176	201.00	202.00	1.00	14,149	14,149	4,068	2,440	6,263	850	3,218	493	115	261	22.9	82.4	11.3	22.2	2.4	12.8	1.6	353	13,640	509			
KR-176	226.00	227.00	1.00	3,591	3,591	1,021	629	1,517	205	816	144	37	79	7.2	27.7	4.0	7.7	0.9	5.2	0.6	112	3,426	165			
KR-178	138.70	135.51	8.81	14,223	125,307	4,323	2,268	6,145	852	3,471	548	124	287	25.7	96.0	12.5	24.3	2.6	13.6	1.6	352	13,695	528			
KR-178	126.70	131.00	4.30	26,630	114,507	8,173	4,189	11,480	1,606	6,568	1,038	234	542	48.3	179.4	23.2	44.4	4.7	24.3	2.8	646	25,656	974			
KR-178	156.40	158.40	2.00	4,979	9,957	1,433	842	2,175	279	1,153	187	41	98	8.7	34.2	4.8	10.1	1.1	6.3	0.8	137	4,776	202			
KR-180	53.00	64.00	11.00	7,321	80,526	1,994	1,431	3,297	411	1,583	222	43	108	10.3	38.3	5.4	10.8	1.2	6.6	0.9	151	7,096	225			
KR-180	60.00	62.00	2.00	28,818	57,635	8,593	4,856	12,937	1,731	6,862	965	188	456	42.6	152.9	20.5	40.1	4.3	23.3	2.7	536	27,995	822			
KR-180	138.70	151.00	12.30	9,493	116,759	2,790	1,661	4,099	546	2,244	342	79	184	16.9	59.4	8.0	15.6	1.6	8.5	1.1	226	9,156	337			
KR-180	141.75	148.70	6.95	13,441	93,413	4,040	2,261	5,772	786	3,255	498	116	269	24.7	86.7	11.6	22.3	2.2	11.9	1.5	323	12,957	484			
KR-180	154.00	156.00	2.00	3,117	6,234	652	790	1,477	148	504	63	14	33	3.4	13.6	1.9	4.0	0.4	2.7	0.4	62	3,029	88			
KR-181	61.06	63.06	2.00	6,776	13,553	1,877	1,306	2,996	377	1,500	214	46	108	10.0	36.4	5.1	10.3	1.1	6.2	0.8	159	6,547	229			
KR-184	72.00	73.00	1.00	2,744	2,744	762	493	1,218	153	609	95	18	49	4.6	18.8	2.6	5.5	0.6	3.4	0.4	74	2,634	110			
KR-186	37.17	61.20	24.03	17,649	424,101	5,568	2,601	7,528	1,078	4,489	741	167	394	34.8	128.5	16.3	30.2	3.1	15.4	1.8	419	17,600	649			
KR-186	37.17	44.45	7.28	49,324	359,082	15,926	6,972	20,956	3,070	12,856	2,133	472	1,123	98.7	358.7	44.8	81.7	8.2	40.3	4.6	1,105	47,582	1,742			
KR-189	41.55	73.22	31.67	8,068	255,514	1,511	2,383	3,852	365	1,146	124	28	56	5.2	19.3	2.8	5.9	0.7	4.1	0.5	77	7,953	115			
KR-189	43.55	44.58	1.03	12,692	13,073	3,649	2,416	5,415	734	2,915	449	112	240	22.3	74.2	10.5	20.7	2.0	10.7	1.4	268	12,283	410			
KR-189	49.85	61.00	11.15	11,133	124,133	2,026	3,343	5,379	502	1,524	156	33	69	6.3	22.2	3.1	6.2	0.7	4.1	0.5	82	11,007	126			
KR-189	66.70	67.70	1.00	17,722	17,722	2,582	6,252	8,571	676	1,906	139	25	47	4.0	15.6	2.5	5.4	0.7	4.3	0.6	71	17,618	104			
KR-189	70.90	71.90	1.00	49,557	49,557	8,166	15,894	24,560	2,138	6,028	490	94	164	12.9	39.0	4.8	8.3	0.9	5.0	0.5	118	49,368	190			
KR-190	14.15	15.00	0.85	33,832	28,757	10,587	5,149	14,245	2,017	8,570	1,496	277	782	67.6	241.1	32.5	59.4	6.6	29.4	4.0	855	32,537	1,295			
KR-190	18.00	21.00	3.00	5,946	17,837	1,662	1,083	2,564	329	1,333	219	52	121	10.9	41.3	6.0	11.8	1.4	6.9	0.9	166	5,701	245			
KR-190	19.00	20.00	1.00	10,086	10,086	2,832	1,853	4,335	558	2,274	368	93	204	17.7	67.3	9.7	19.0	2.1	10.9	1.4	273	9,685	401			
KR-197	37.00	47.00	10.00	2,045	20,450	454	525	876	102	352	53	14	30	3.0	12.7	2.1	5.0	0.6	3.9	0.5	65	1,952	93			
KR-214	91.70	92.60	0.90	5,687	5,118	1,572	1,082	2,493	313	1,259	197	48	101	8.9	35.8	4.6	9.3	1.0	4.8	0.7	130	5,492	195			
KR-214	139.20	159.50	20.30	3,999	81,180	1,094	759	1,743	215	879	135	33	74	6.8	26.5	3.8	7.7	0.9	4.5	0.6	109	3,839	159			
KR-214	196.90	202.90	6.00	4,227	25,362	1,128	827	1,866	233	895	134	34	74	7.0	27.1	3.9	7.6	0.9	5.1	0.6	112	4,063	164			
KR-214	356.50	361.10	4.60	45,674	210,100	7,296	14,859	22,878	1,981	5,315	378	63	102	7.3	18.5	2.2	4.1	0.4	2.4	0.4	62	45,576	98			
KR-249	27.90	36.50	8.60	4,670	40,162	1,295	906	2,040	261	1,034	151	39	80	7.5	27.9	3.7	7.7	0.8	4.3	0.6	107	4,511	159			
KR-249	43.02	44.55	1.53	2,506	3,834	721	445	1,088	141	580	81	24	45	4.3	17.5	2.1	5.0	0.6	3.4	0.4	70	2,402	103			
KR-249	81.39	82.63	1.24	2,909	3,607	680	667	1,320	149	531	69	14	39	4.2	18.3	2.5	5.6	0.7	3.9	0.6	84	2,790	120			
KR-249	97.73	105.15	7.42	7,990	59,286	2,453	1,306	3,390	466	1,987	299	74	156	15.1	57.6	7.7	15.6	1.6	7.8	1.0	206	7,678	313			
KR-249	97.73	98.78	1.05	10,428	10,949	3,069	1,783	4,507	597	2,472	374	93	202	19.2	73.1	9.4	19.5	2.1	9.5	1.4	268	10,026	402			
KR-249	104.61	105.15	0.54	14,650	7,911	4,799	2,152	6,201	905	3,894	597	100	293	27.0	101.8	12.8	25.9	2.7	12.6	1.6	321	14,144	506			
KR-250	17.80	19.20	1.40	2,623	3,672	487	765	1,208	108	379	52	20	26	2.5												