

26 February 2018

ST GEORGE TO RESUME DRILLING OF NICKEL-COPPER SULPHIDE TARGETS AT MT ALEXANDER

HIGHLIGHTS:

- Diamond and RC drill programme at Mt Alexander to commence shortly
- Programme will focus on targets in the Cathedrals Belt where recurrent high grade nickel-copper-cobalt-PGE sulphide mineralisation has been intersected over a 4km strike
- Drilling will include testing for extensions of the thick, high grade mineralisation identified at the Stricklands Prospect by MAD71 which intersected:
 - 17.45m @ 3.01%Ni, 1.31%Cu, 0.13%Co and 1.68g/t total PGEs from 37.45m including the massive sulphide zones of*
 - 5.3m @ 4.39%Ni, 1.45%Cu, 0.21%Co and 2.09g/t total PGEs from 39.3m and*
 - 2.02m @ 5.05%Ni, 2.01%Cu, 0.21%Co and 3.31g/t total PGEs from 50.6m and*
 - 0.5m @ 3.68%Ni, 3.9%Cu, 0.17%Co and 2.68g/t total PGEs from 54.4m*
- Drilling will also test EM (electromagnetic) anomalies in underexplored areas including the first ever deep drilling of EM targets at the Investigators Prospect

Emerging West Australian nickel company St George Mining Limited (ASX: **SGQ**) ('St George' or 'the Company') is pleased to announce that a major diamond and RC (reverse circulation) drill programme is scheduled to commence this week at the Mt Alexander Project near Leonora, in the North-eastern Goldfields of Western Australia.

The planned drill programme involves twenty planned drill holes for 2,510m of drilling. Further drilling will be undertaken as drill results are assessed and downhole EM (DHEM) surveys on completed drill holes are reviewed.

The majority of the planned drill holes are at the Stricklands Prospect where drill hole MAD71, completed late last year, returned the best intersection to date at the Mt Alexander Project.

St George Mining Executive Chairman, John Prineas said:

"Drilling in 2017 at Mt Alexander intersected thick massive nickel-copper sulphides at each of the Stricklands, Investigators and Cathedrals Prospects. We are excited to be commencing our 2018 drill programme at Mt Alexander to follow-up on last year's success.

"At Stricklands, nine drill holes were completed last year to follow-up the outstanding intersection in MAD71 and of those seven drill holes intersected nickel-copper sulphide mineralisation. The high strike rate provides confidence that further drilling at Stricklands will continue to identify mineralised ultramafic."

Heavy rain in the North-eastern Goldfields in recent weeks created adverse ground conditions and prevented the drill rig and support vehicles from accessing the Mt Alexander site. Conditions have now improved and the drill rig is scheduled to arrive on site by Friday this week.


Stricklands Prospect:

The thick ultramafic channel at Stricklands was identified by MAD49 which intersected **18.86m @ 0.42%Ni, 0.16%Cu, 0.02%Co** and **0.36g/t total PGEs from 31.8m** and **3.36m @ 2.09%Ni, 1.18%Cu, 0.09%Co** and **1.82g/t total PGEs from 50.66m**.

MAD71 was subsequently drilled to the north of MAD49 and also intersected the prospective ultramafic unit at shallow depth but with a much thicker high grade nickel-copper sulphide intersection including more than 8m in aggregate of massive nickel-copper sulphides.

Follow-up drilling last year at Stricklands continued to intersect the mineralised ultramafic, which is interpreted as an east-northeast oriented ultramafic channel. Drilling to date indicates the mineralised channel may extend over 400m.

This year's planned drilling at Stricklands will continue to test for extensions to the mineralised ultramafic, particularly where it is co-incident with the strongest portion of a large SAMSON EM anomaly.

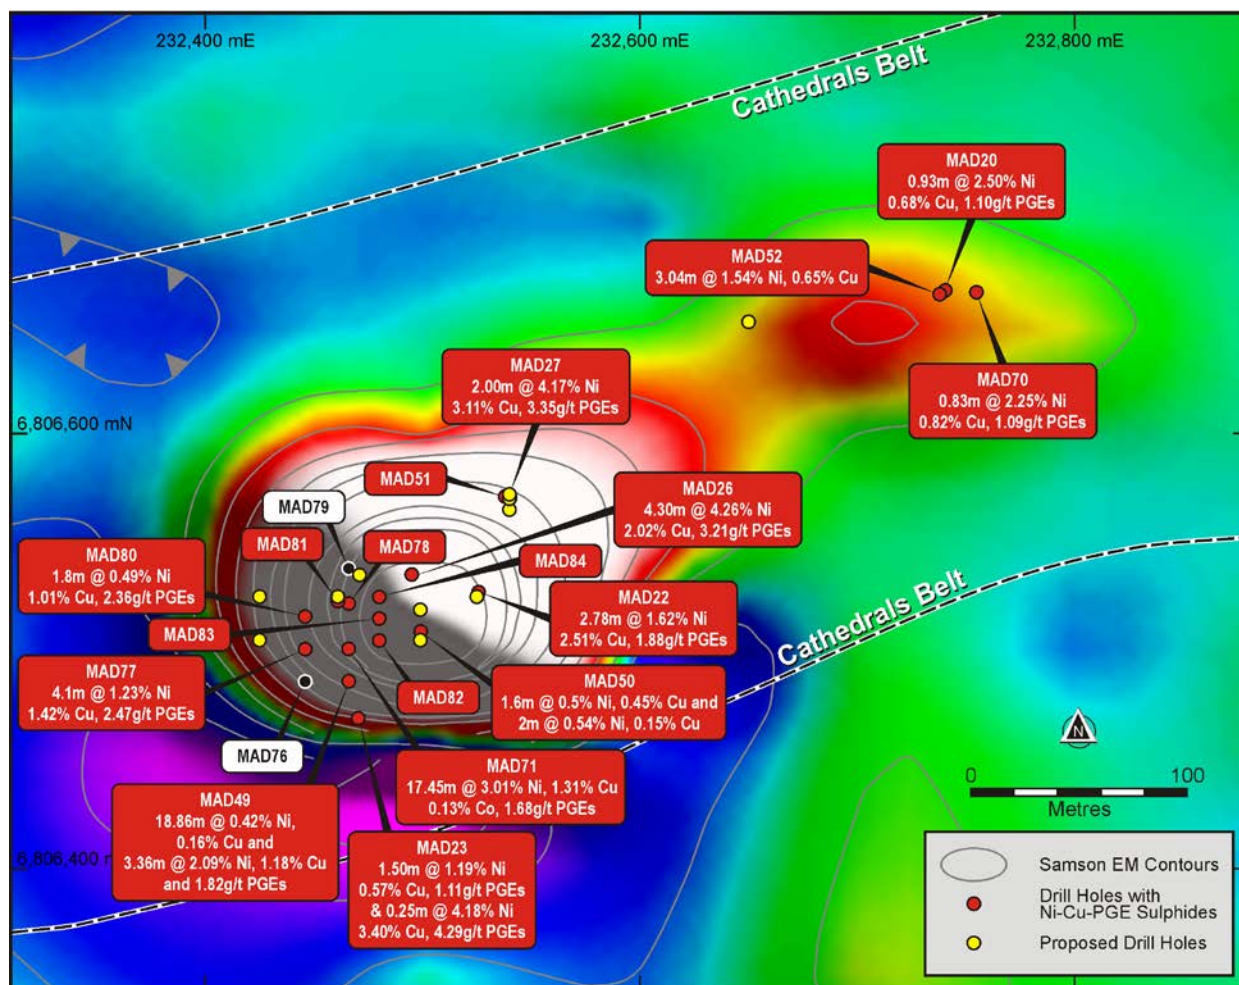

Planned drill holes are along strike and to the north of MAD71. Drill holes will test both off-hole DHEM conductors and geological targets for mineralised ultramafic in the interpreted thickened channel positions.

Investigators Prospect:

The SAMSON EM survey identified large conductive areas at the Investigators Prospect over a one kilometre portion of the mineralised Cathedrals Belt; see Figure 2. Numerous drill holes at Investigators have intersected massive sulphides, but these do not fully account for the large EM signatures at Investigators.

The best high grade intersection at Investigators is in MAD60 which intersected **5.3m @ 4.95%Ni, 2.75%Cu, 0.16%Co and 4.55g/t total PGEs from 157.9m including 3m @ 6.40%Ni, 3.55%Cu, 0.21%Co and 5.25g/t total PGEs from 159.38m.**

The upcoming drilling will test a 500m strike of the Investigators trend including several DHEM and SAMSON EM plates. The SAMSON EM plates to be drilled will test for mineralised ultramafic at depth in areas with minimal previous drill testing.

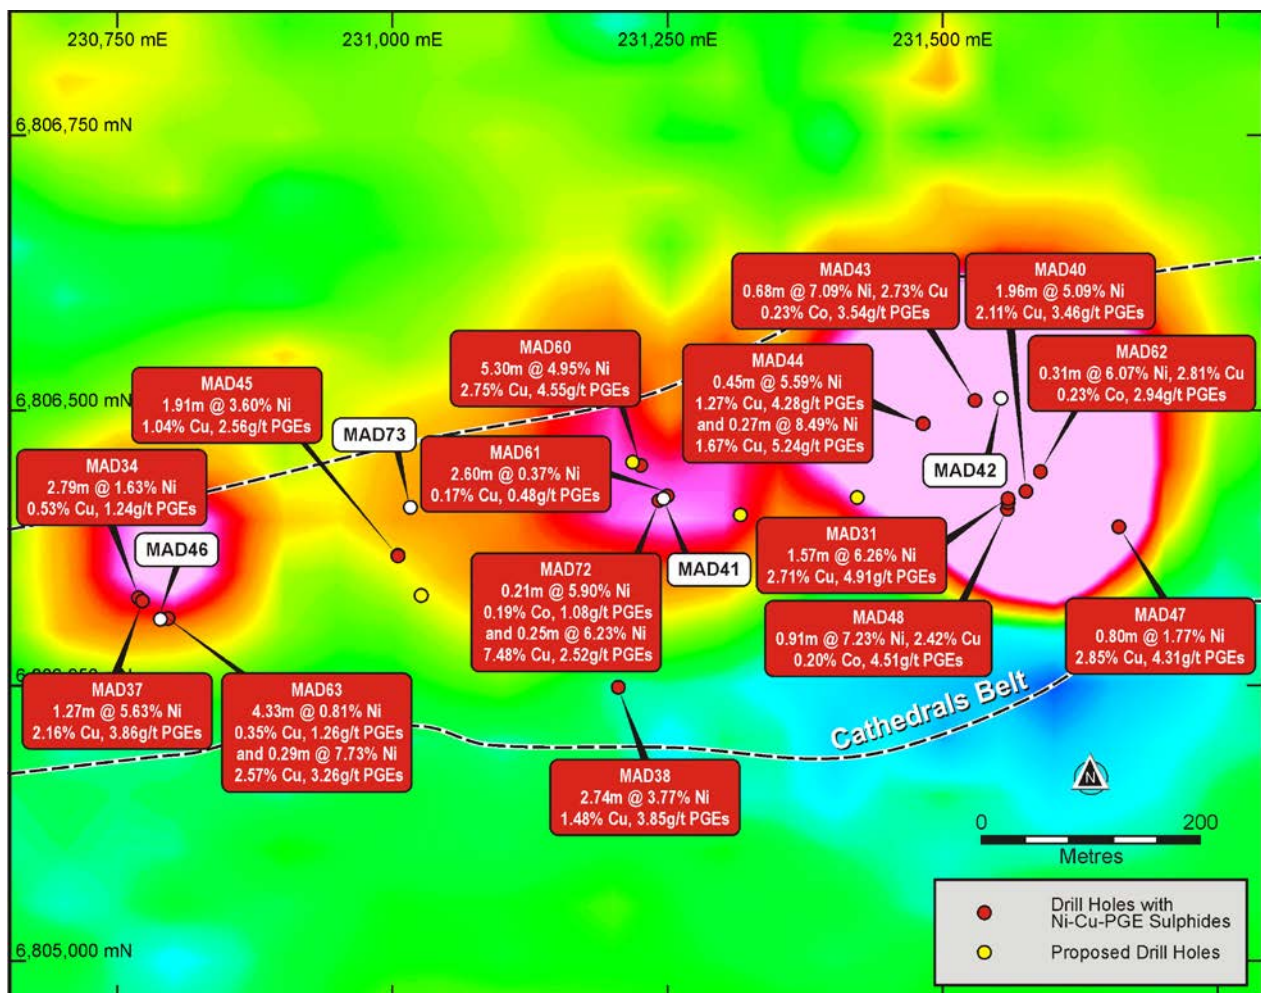


Figure 2 – a plan view of the Investigators Prospect with drill hole collar locations (completed and planned) over the large SAMSON total field EM anomalies (white/red colours). The SAMSON EM image is shown in Channel 18 (44ms).

Table 1 contains details of the planned drill holes. In addition to the drilling at Stricklands and Investigators outlined above, one drill hole is planned at the Cathedrals Prospect to test for a depth extension to the mineralised footwall fault position.

Two drill holes are also planned on tenement E29/548 (100% St George) to test two anomalous EM responses that are co-incident with a magnetic anomaly that could represent prospective ultramafics.

HOLEID	Prospect	MGA East	MGA North	HQ Depth	Depth(m)	Dip	Azimuth	Depth to Target
Nth1	E29/548	230200	6809500	RC	140	-75	90	96
Nth2	E29/548	230620	6809580	RC	180	-65	160	137
ST_PROP19	Stricklands	232471	6806535	80	80	-75	180	40
ST_PROP23	Stricklands	232525	6806525	60	80	-60	0	60
ST_PROP22	Stricklands	232525	6806525	50	70	-87	0	50
ST_PROP28	Stricklands	232540	6806570	60	80	-60	105	60
ST_PROP24	Stricklands	232540	6806572	60	80	-75	165	60
ST_PROP25	Stricklands	232540	6806565	60	80	-60	165	60
ST_PROP20	Stricklands	232499	6806505	50	70	-85	0	35
ST_PROP21	Stricklands	232499	6806519	50	70	-60	0	40
ST_PROP18	Stricklands	232461	6806525	80	100	-74	0	70
ST_PROP26	Stricklands	232425	6806525	50	70	-80	180	50
ST_PROP27	Stricklands	232425	6806505	50	70	-80	180	50
ST_PROP29	Stricklands	232650	6806651.36	60	100	-70	180	55
InvProp_31	Investigators	231026	6806332	100	210	-75	0	175
InvProp_26	Investigators	231218	6806453	RC to 100m	250	-75	0	220
InvProp_27	Investigators	231316	6806405	RC to 100m	200	-75	0	169
InvProp_28	Investigators	231422	6806421	RC to 100m	205	-75	0	175
InvProp_32	Investigators	232000	6806555	RC	135	-70	180	105
CATH_PROP13	Cathedrals	233700	6807100	RC to 100m	240	-70	180	195

Table 1 – planned drill holes for Phase 1 2018 drill programme at Mt Alexander.

ABOUT THE MT ALEXANDER PROJECT

The Mt Alexander Project is located 120km south-southwest of the Agnew-Wiluna belt which hosts numerous world class nickel deposits. The Project comprises four granted exploration licences – E29/638, E29/548, E29/962 and E29/954.

The Cathedrals, Stricklands and Investigators nickel-copper-cobalt-PGE discoveries are located on E29/638, which is held in joint venture by Western Areas Limited (25%) and St George (75%). St George is the Manager of the Project with Western Areas retaining a 25% non-contributing interest in the Project (in regard to E29/638 only) until there is a decision to mine.

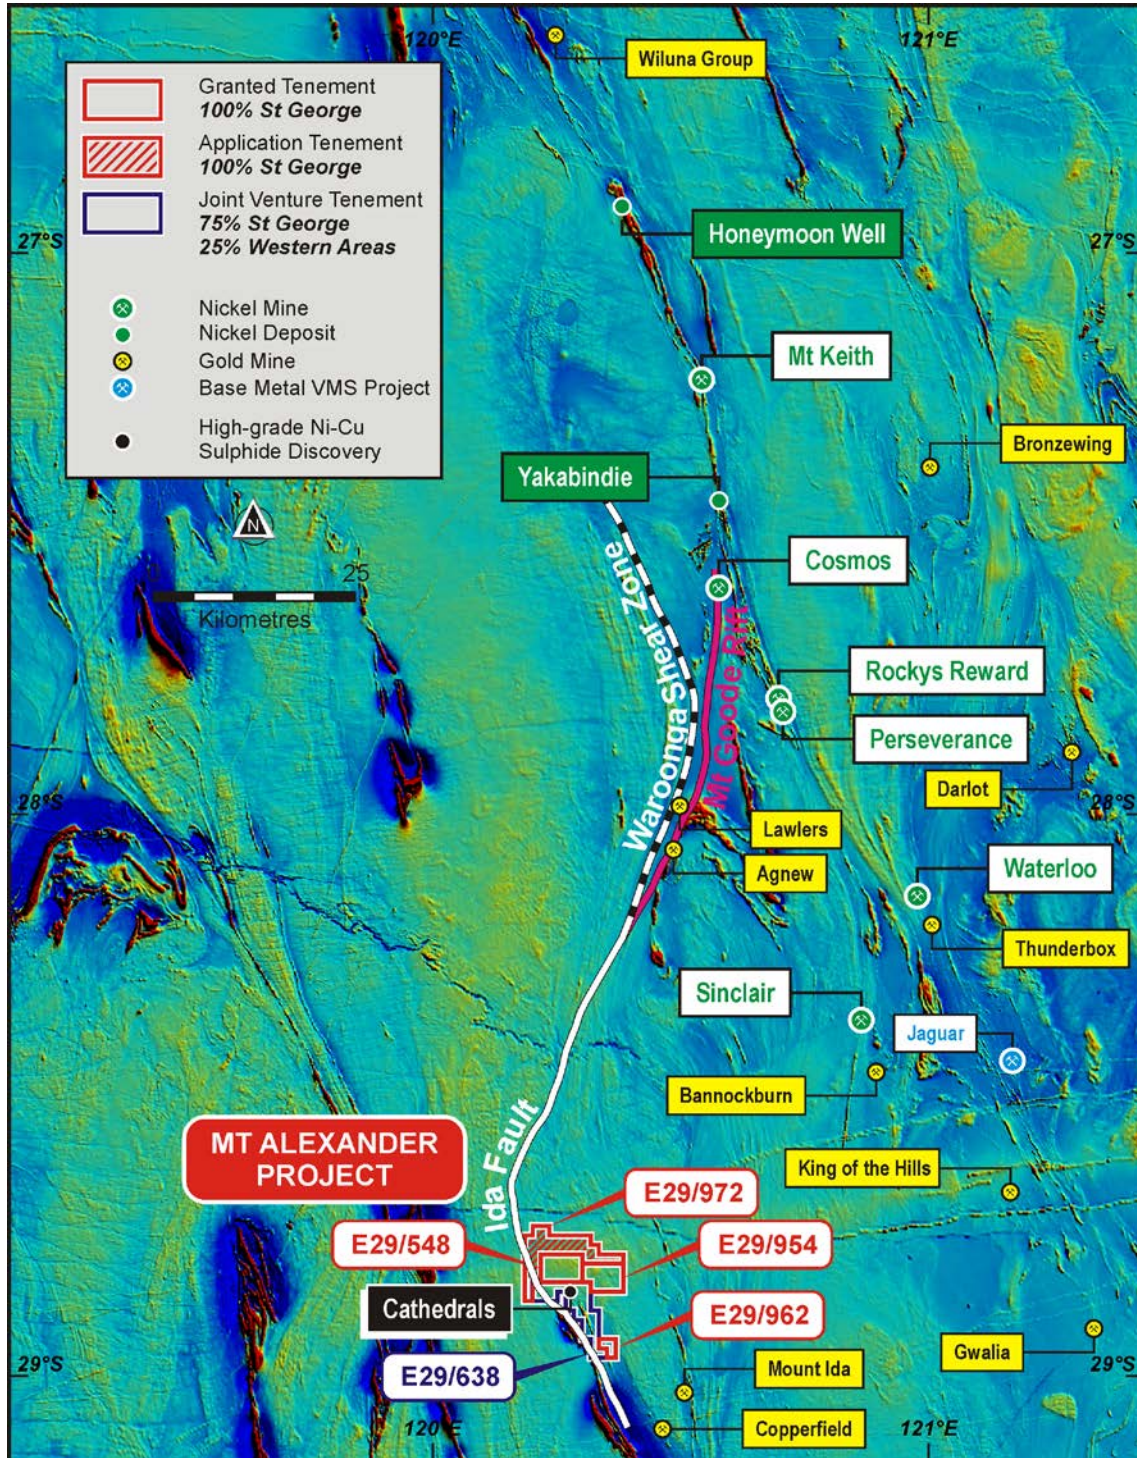


Figure 3 – a map (over TMI magnetics) showing the location of Mt Alexander Project to the south-southwest of major nickel projects in the Agnew-Wiluna Belt and in proximity to existing infrastructure.

For further information, please contact:

John Prineas

Executive Chairman

St George Mining Limited

+61 (0) 411 421 253

John.prineas@stgm.com.au

Peter Klinger

Media and Investor Relations

Cannings Purple

+61 (0) 411 251 540

pklinger@canningspurple.com.au

Competent Person Statement:

The information in this report that relates to Exploration Targets, Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Mr Matthew McCarthy, a Competent Person who is a Member of The Australian Institute of Geoscientists. Mr McCarthy is employed by St George Mining Limited.

Mr McCarthy has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr McCarthy consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The following sections are provided for compliance with requirements for the reporting of exploration results under the JORC Code, 2012 Edition.

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i>	The sections of the core that are selected for assaying are marked up and then recorded on a sample sheet for cutting and sampling at the certified assay laboratory. Samples of HQ or NQ2 core are cut just to the right of the orientation line where available using a diamond core saw, with half core sampled lengthways for assay.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	Wherever possible the same side of the drill core is sampled to ensure sample is representative. Appropriate QAQC samples are inserted into the sequences as per industry best practice.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i>	Diamond core (both HQ and NQ2) is half-core sampled to geological boundaries no more than 1.5m and no less than 10cm. Samples less than 3kg are crushed to 10mm, dried and then pulverised to 75µm. Samples greater than 3kg are first crushed to 10mm then finely crushed to 3mm and input into the rotary splitters to produce a consistent output weight for pulverisation. Pulverisation produces a 40g charge for fire assay. Elements determined from fire assay are gold (Au), platinum (Pt) and palladium (Pd) with a 1ppb detection limit. To determine other PGE concentrations (Rh, Ru, Os, Ir) a 25g charge for nickel sulphide collect fire assay is used with a 1ppb detection limit. Other elements will be analysed using an acid digest and an ICP finish. These elements are: Ag, Al, As, Bi, Ca, Cd, Co, Cr, Fe, K, Li, Mg, Mn, Mo, Nb, Ni, P, Pb, S, Sb, Sn, Te, Ti, V, W, Zn. The sample is digested with nitric, hydrochloric, hydrofluoric and perchloric acids to effect as near to total solubility of the sample as possible. The sample is then analysed using ICP-AES or ICP-MS. LOI (Loss on Ignition) will be completed on selected samples to determine the percentage of volatiles released during heating of samples to 1000°C.
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Diamond drilling is completed using HQ sized coring equipment through the weathered zone (mostly saprock) with 3m barrels, and then HQ or NQ2 in fresh rock with 3m or 6m barrels as required. The core is oriented using ACT II electric core orientation.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	Diamond core recoveries are recorded during drilling and reconciled during the core processing and geological logging. The core length recovered is measured for each run and recorded which is used to calculate core recovery as a percentage.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Measures taken to maximise core recovery include using appropriate core diameter and shorter barrel length through the weathered zone, which at Cathedrals and Investigators is mostly <20m and Stricklands <40m depth. Primary locations for core loss in fresh rock are on geological contacts and structural zones, and drill techniques are adjusted accordingly, and if possible these zones are predicted from the geological modelling.

Criteria	JORC Code explanation	Commentary
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No sample recovery issues have yet been identified that would impact on potential sample bias in the competent fresh rocks that host the mineralised sulphide intervals.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Geological logging is completed for all drill holes with lithology, alteration, mineralisation, structure and veining recorded. The logging is recorded digitally and imported in the St George Mining central database.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</i>	Logging is both qualitative and quantitative depending on the field being captured. Core is photographed with one tray per photo and stored digitally.
	<i>The total length and percentage of the relevant intersections logged.</i>	All drill holes are geologically logged in full.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	The HQ and NQ2 core is cut in half length ways just to the right of the orientation line where available using a diamond core saw. All samples are collected from the same side of the core where practicable.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	Reverse circulation holes will be rotary cone split, and wetness will be recorded during drilling.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	The entire sample is pulverised to 75µm using LM5 pulverising mills. Samples are dried, crushed and pulverized to produce a homogenous representative sub-sample for analysis. A grind quality target of 90% passing 75µm is used.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	Quality control procedures include submission of Certified Reference Materials (standards), duplicates and blanks with each sample batch. QAQC results are routinely reviewed to identify and resolve any issues.
	<i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Duplicate samples are selected during sampling. Samples comprise two quarter core samples.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	The sample sizes are considered to be appropriate for base metal sulphide mineralisation and associated geology.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Diamond core samples are analysed for Au, Pt and Pd using a 40g lead collection fire assay; for Rh, Ru, Os, Ir using a 25g nickel sulphide collection fire assay; and for Ag, Al, As, Bi, Ca, Cd, Co, Cr, Fe, K, Li, Mg, Mn, Mo, Nb, Ni, P, Pb, S, Sb, Sn, Te, Ti, V, W, Zn using a four acid digest and ICP-AES or MS finish. The assay method and detection limits are appropriate for analysis of the elements required.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	A handheld XRF instrument (Olympus Innov-X Spectrum Analyser) is used to systematically analyse the drill core and RC sample piles onsite. One reading is taken per meter, however for any core samples with matrix or massive sulphide mineralisation then multiple samples are taken at set intervals per meter. The instruments are serviced and calibrated at least once a year. Field calibration of the XRF instrument using standards is periodically performed (usually daily). The handheld XRF results are only used for preliminary assessment and reporting of element compositions, prior to the receipt of assay results from the certified laboratory.

Criteria	JORC Code explanation	Commentary
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i>	Laboratory QAQC involves the use of internal lab standards using certified reference material (CRMs), blanks and pulp duplicates as part of in house procedures. The Company also submits a suite of CRMs, blanks and selects appropriate samples for duplicates. Sample preparation checks for fineness are performed by the laboratory to ensure the grind size of 90% passing 75µm is being attained.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Significant intersections are verified by the Exploration Manager of St George Mining.
	<i>The use of twinned holes.</i>	No twin holes are planned for the upcoming drill program. One scissor hole is planned for the significant intersection in MAD71.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	Primary data is captured onto a laptop using acQuire software and includes geological logging, sample data and QA/QC information. This data, together with the assay data, is entered into the St George Mining central SQL database which is managed by external consultants.
	<i>Discuss any adjustment to assay data.</i>	No adjustments or calibrations will be made to any primary assay data reported.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	Drill holes have been located and pegged using a DGPS system with an expected accuracy of +/-0.05mmm for easting, northing and elevation. Downhole surveys are conducted using a single shot camera approximately every 30m during drilling to record and monitor deviations of the hole from the planned dip and azimuth. Post-drilling downhole gyroscopic surveys will be conducted, which provide more accurate survey results.
	<i>Specification of the grid system used.</i>	The grid system used at the Mt Alexander project is GDA94 (MGA), zone 51.
	<i>Quality and adequacy of topographic control.</i>	Elevation data has been acquired using DGPS surveying at individual collar locations and entered into the central database. A topographic surface has been created using this elevation data.
Data spacing and distribution	<i>Data spacing for reporting of Exploration Results.</i>	The diamond drill program is testing modelled EM conductors and geological criteria for massive nickel-copper-PGE sulphide mineralisation. The spacing and distribution of the planned drill holes is appropriate to test the defined targets.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	The completed drilling at Cathedrals, Stricklands and Investigators is not sufficient to establish the degree of geological and grade continuity to support the definition of Mineral Resource and Reserves and the classifications applied under the 2012 JORC code.
	<i>Whether sample compositing has been applied.</i>	No compositing has been applied to the exploration results.
Orientation of data in relation to geological structure	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Drill holes are planned as perpendicular as possible to the target EM plates and geological units to approximate true width. Most of the ultramafic units in the Cathedrals Belt dip shallow to the north (and occasionally south) and where possible drill holes are planned to

Criteria	JORC Code explanation	Commentary
		intersect perpendicular to this dip. The orientation of key structures may be locally variable.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	No orientation based sampling bias has been identified in the data to date.
Sample security	<i>The measures taken to ensure sample security.</i>	Chain of custody is managed by St George Mining. Core samples are stored in the secure facilities at Bureau Veritas laboratory in Perth. Transportation of core is managed by St George contractors and Bureau Veritas and actively track monitored.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audits or reviews have been conducted at this stage.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral Tenement and Land Status	<i>Type, name/reference number, location and ownership including agreements or material issues with third parties including joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The Mt Alexander Project is comprised of four granted Exploration Licences (E29/638, E29/548, E29/954 and E29/962). Tenement E29/638 is held in Joint Venture between St George (75% interest) and Western Areas (25% interest). E29/638 and E29/548 are also subject to a royalty in favour of a third party that is outlined in the ASX Release dated 17 December 2015 (as regards E29/638) and the ASX release dated 18 September 2015 (as regards E29/548). No environmentally sensitive sites have been identified on the tenements. A registered Heritage site known as Willsmore 1 (DAA identification 3087) straddles tenements E29/548 and E29/638. All four tenements are in good standing and no known impediments exist.
Exploration Done by Other Parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	Exploration on tenements E29/638 and E29/962 has been largely for komatiite-hosted nickel sulphides in the Mt Alexander Greenstone Belt. Exploration in the northern section of E29/638 (Cathedrals Prospect) and also limited exploration on E29/548 has been for komatiite-hosted Ni-Cu sulphides in granite terrane. No historic exploration has been identified on E29/954. The target lithological unit in the Mt Alexander Greenstone belt has historically been the Central Ultramafic Unit, which has been explored by a number of parties, most recently by Nickel West. High grade nickel-copper-PGE sulphides were discovered at the Mt Alexander Project in 2008. Drilling was completed to test co-incident electromagnetic (EM) and magnetic anomalies associated with nickel-PGE enriched gossans in the northern section of current tenement E29/638. The drilling identified high grade nickel-copper mineralisation in granite-hosted ultramafic units and the discovery was named the Cathedrals Prospect. The tenements remain underexplored.
Geology	<i>Deposit type, geological setting and style of mineralisation</i>	The Mt Alexander Project is at the northern end of a western bifurcation of the Mt Ida Greenstones. The greenstones are bound to the west by the Ida Fault, a significant Craton-scale structure that marks the boundary between the Kalgoorlie Terrane (and Eastern Goldfields Superterrane) to the east and the Youanmi Terrane to the west. The Mt Alexander Project is prospective for further high-grade komatiite-hosted nickel-copper-PGE mineralisation (both greenstone and granite hosted) and also precious metal mineralisation (i.e.

Criteria	JORC Code explanation	Commentary
		orogenic gold) that is typified elsewhere in the Yilgarn Craton.
Drill hole information	A summary of all information material to the understanding of the exploration results including tabulation of the following information for all Material drill holes: • Easting and northing of the drill hole collar • Elevation or RL (Reduced Level – elevation above sea level in meters) of the drill hole collar • Dip and azimuth of the hole • Down hole length and interception depth • Hole length	Drill hole collar locations are shown in Figures 1 and 2, and Table 1 in the body of the release.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.	Reported assay intersections are length and density weighted. Significant intersections are determined using both qualitative (i.e. geological logging) and quantitative (i.e. lower cut-off) methods. For massive sulphide intersections, the nominal lower cut-off is 2% for either nickel or copper. For disseminated, blebby and matrix sulphide intersections the nominal lower cut-off for nickel is 0.3%.
	Where aggregated intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Any high-grade sulphide intervals internal to broader zones of sulphide mineralisation are reported as <i>included</i> intervals. Any disseminated, matrix, brecciated or stringer sulphides with (usually) >1% nickel or copper on contact with massive sulphide mineralisation are grouped with the massive sulphides for calculating significant intersections and the massive sulphide mineralisation is reported as an <i>including</i> intersection.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No metal equivalent values have yet been used for reporting exploration results.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of exploration results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. down hole length, true width not known).	Assay intersections are reported as down hole lengths. Drill holes are planned as perpendicular as possible to intersect the target EM plates and geological targets so downhole lengths are usually interpreted to be near true width.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plane view of drill hole collar locations and appropriate sectional views.	Relevant plan maps are shown in the body of the release.
Balanced Reporting	Where comprehensive reporting of all Exploration Results is not practical, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting Exploration Results.	The exploration results reported are representative of the mineralisation style with grades and/or widths reported in a consistent manner.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observation; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All material or meaningful data collected has been reported.

Criteria	JORC Code explanation	Commentary
Further Work	<i>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large – scale step – out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Further exploration in the Cathedrals Belt will be largely dependent on the results from the upcoming drill program. Further exploration is also warranted north of the Cathedrals Belt on E29/548, and also in the Mt Alexander greenstone belt to the south.